

SUMMARY OF QUANTITIES

SUMMARY OF QUANTITIES			CONSTRUCTION TYPE CODE		SUMMARY OF QUANTITIES			CONSTRUCTION TYPE CODE	
CODE NO	ITEM	UNIT	TOTAL QUANTITIES		CODE NO	ITEM	UNIT	TOTAL QUANTITIES	
44000400	GUTTER REMOVAL	FOOT	1958	1958					
44004250	PAVED SHOULDER REMOVAL	SO YD	3471	3471					
48101200	AGGREGATE SHOULDERS, TYPE B	TON	213	213					
48203021	HOT-MIX ASPHALT SHOULDERS, 6"	SO YD	3471	3471					
60600095	CLASS SI CONCRETE (OUTLET)	CU YD	10	10					
60602500	CONCRETE GUTTER, TYPE A	FOOT	1511	1511					
64200105	SHOULDER RUMBLE STRIPS	FOOT	7521	7521					
67100100	MOBILIZATION	L SUM	1	1					
70102625	TRAFFIC CONTROL AND PROTECTION, STANDARD 701606	L SUM	1	1					
70102632	TRAFFIC CONTROL AND PROTECTION, STANDARD 701602	L SUM	1	1					
70300100	SHORT TERM PAVEMENT MARKING	FOOT	1171	1171					
70300220	TEMPORARY PAVEMENT MARKING- LINE 4"	FOOT	12884	12884					
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SO FT	390	390					
78300100	PAVEMENT MARKING REMOVAL	SO FT	4295	4295					
X0325866	CENTER LINE - RUMBLE STRIP	FOOT	6442	6442					
*X7800610	URETHANE PAVEMENT MARKING - LINE 4"	FOOT	19884	19884					

90% FED
10% STATE
0021
URBAN



*SPECIALTY ITEM

⚠ REVISSED 2-23-11

FILE NAME =	USER NAME = burnsideem	DESIGNED - ---	REVISED - ---
es:\pwork\pwork\burnsideem\0207461\4876e35-shr-plan.dgn		DRAWN - ---	REVISED - ---
	PLOT SCALE = 41.2487' / 1" IN.	CHECKED - ---	REVISED - ---
	PLOT DATE = 12/14/2010	DATE - ---	REVISED - ---

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


SUMMARY OF QUANTITIES

SCALE: _____ SHEET NO. ___ OF ___ SHEETS STA. _____ TO STA. _____

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
9122	302-1-3	MADISON	10	3
FED. ROAD DIST. NO. _____ ILLINOIS FED. AID PROJECT			CONTRACT NO. 76E35	

CENTERLINE RUMBLE STRIP			
LOCATION			FOOT
STA	TO	STA	
456+53	TO	472+44	1591
470+43	TO	473+26	283
473+42	TO	509+08	3566
476+30	TO	478+82	252
488+08	TO	492+53	445
494+77	TO	497+82	305
TOTAL:			6442


PAVEMENT MARKING SCHEDULE								
LOCATION			TEMPORARY PAVEMENT MARKING SOLID LINE, 4" (YELLOW)	URETHANE PAVEMENT MARKING SOLID LINE, 4" (YELLOW)	PAVEMENT MARKING REMOVAL	SHORT-TERM PAVEMENT MARKING (YELLOW)	WORKZONE PAVEMENT MARKING REMOVAL	
STA	TO	STA	FOOT	FOOT	SQ FT	FOOT	SQ FT	SQ FT
456+53	TO	472+44	3182	3182	1061	289	96	
470+43	TO	473+26	566	566	189	51	17	
473+42	TO	509+08	7132	7132	2377	648	216	
476+30	TO	478+82	504	504	168	46	15	
488+08	TO	492+53	890	890	297	81	27	
494+77	TO	497+82	610	610	203	55	18	
TOTAL:			12884	12884	4295	1171	390	

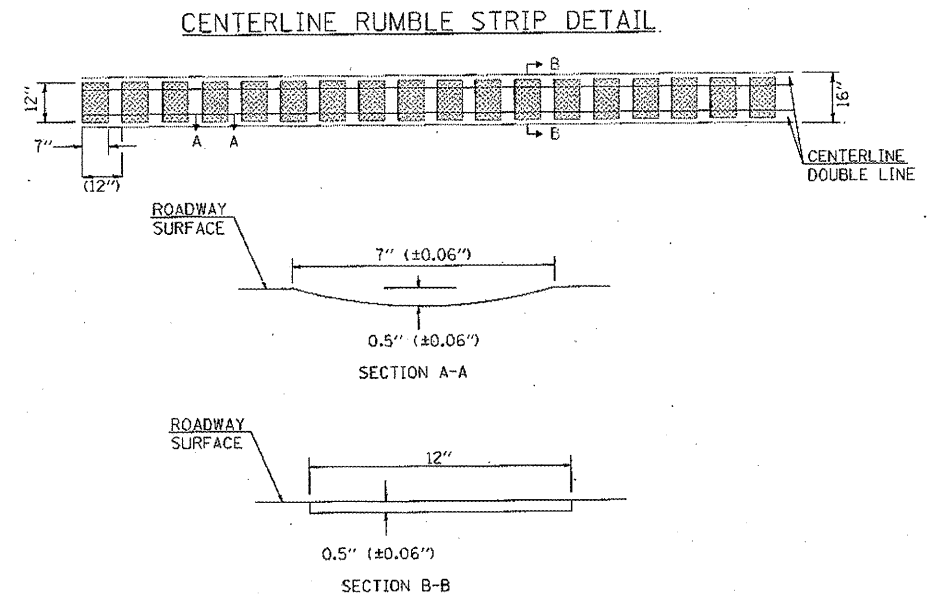

NOTE: THE PROPOSED CENTERLINE PAVEMENT MARKINGS SHALL BE PLACED AFTER THE CONSTRUCTION OF THE RUMBLE STRIP.

SHOULDER RUMBLE STRIPS			
LOCATION			FOOT
STA	TO	STA	
RIGHT			
457+40	TO	459+40	200
460+25	TO	469+00	875
470+30	TO	472+34	204
473+70	TO	476+28	258
477+24	TO	487+32	1008
502+07	TO	509+08	701
LEFT			
459+84	TO	463+04	320
465+05	TO	492+02	2697
492+88	TO	493+60	72
495+07	TO	497+22	215
497+70	TO	505+37	767
507+04	TO	509+08	204
TOTAL:			7521

SHOULDERS					
LOCATION			HMA SHOULDERS, 6"	AGGREGATE SHOULDERS, TYPE B	PAVED SHOULDER REMOVAL
STA	TO	STA	(SQ YD)	(TON)	(SQ YD)
RIGHT					
456+71	TO	472+34	695		695
473+70	TO	487+32	605		605
487+32	TO	496+45		213	
502+07	TO	509+08	312		312
LEFT					
456+71	TO	488+00	1391		1391
498+53	TO	509+08	469		469
TOTAL :			3471	213	3471

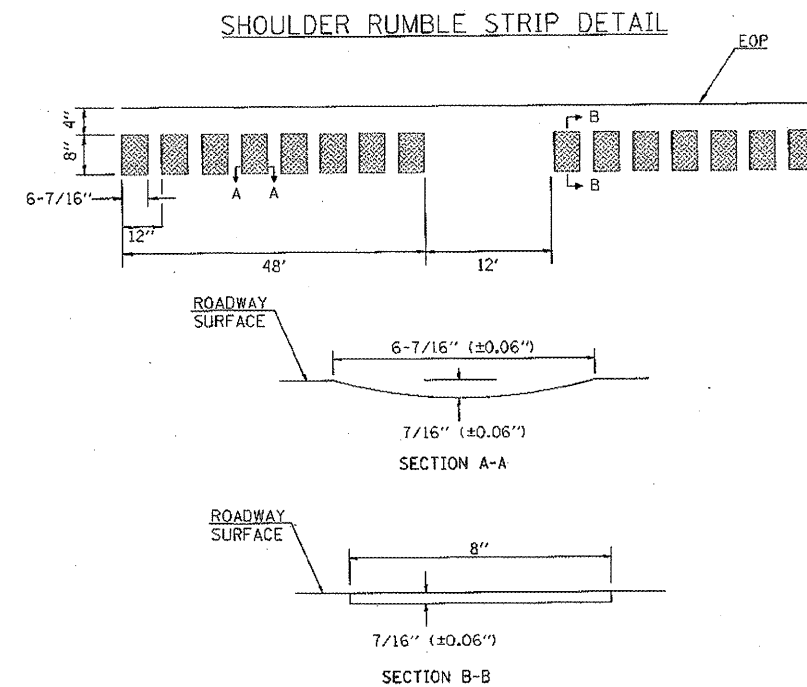

NOTE: THE RUMBLE STRIP PATTERN WILL BE 48' WITH A 12' GAP

CONCRETE GUTTER					
LOCATION			CONCRETE GUTTER TYPE A	CLASS SI CONCRETE (OUTLET)	GUTTER REMOVAL
STA	TO	STA	(FOOT)	(CU YD)	(FOOT)
RIGHT					
482+85	TO	487+32			447
LEFT					
465+05	TO	480+16	1511	10	1511
TOTAL :			1511	10	1958

REVISIONS SHEET 2-23-11

FILE NAME =	USER NAME = burnsideem	DESIGNED -	REVISIONS -
g:\pe_work\pudat\burnsideem\d2207481\7635-ah-1-pln.dgn	7635-ah-1-pln.dgn	DRAWN -	REVISIONS -
		CHECKED -	REVISIONS -
		DATE -	REVISIONS -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES & DETAILS

F.A.I. RTE. NO. 9122	SECTION 302-1-3	COUNTY MADISON	TOTAL SHEETS 10	SHEET NO. 5
CONTRACT NO. 7635			FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT	

SCALE: SHEET NO. OF SHEETS STA. TO STA.