


**PLAN**

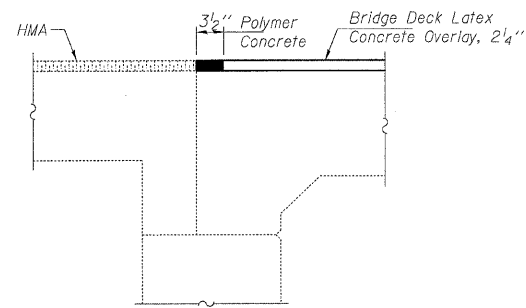

**SECTION A-A**

Cost of Polymer Concrete is included in the cost of Bridge Deck Latex Concrete Overlay, 2 1/4"

**NOTE:**  
INSPECTION WAS CONDUCTED ON SEPTEMBER 28, 2007  
BY I.D.O.T. FIELD MAINTENANCE ENGINEERS

**BILL OF MATERIAL**

ITEM	UNIT	QUANTITY
Deck Slab Repair (Full Depth, Type II)	Sq. Yd.	35

**LEGEND:**

- Deck Slab Repair (Full Depth, Type II), Eliminate Floor Drains
- Deck Slab Repair (Full Depth, Type II), Floor Drains to Remain

**CR & A**  
CHRISTIAN-ROGE & ASSOCIATES, INC.  
ENGINEERS / PLANNERS / SURVEYORS  
211 W. WACKER DRIVE CHICAGO, IL 60606  
PHONE: (312)372-2023 FAX: (312)372-5274

FILE NAME = deck_repair.sht	USER NAME = IDOT	DESIGNED - B.N.S.	REVISED -
		DRAWN - D.L./R.E.S./F.M.	REVISED -
	PLOT SCALE = 50,0000' / IN.	CHECKED - B.N.S./J.C.N.	REVISED -
	PLOT DATE = 1/12/2009	DATE - JANUARY 12, 2009	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>DECK CONCRETE PATCHING U.S. 45 OVER FORKED CREEK</b>		<b>S.N. 099-0243</b>	
SCALE:	SHEET NO. S3 OF S3 SHEETS	STA.	TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
330	105 B-3-I	WILL	18	13
FED. ROAD DIST. NO. 1 [ILLINOIS] FED. AID PROJECT			CONTRACT NO. 6067	