Contract # 60D74

## **NOTES**

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.

Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.

Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:


Minimum Capacity (Tension in kips) =  $1.25 \times fy \times A_t$ 

(lension iii kipo)
Minimum \*Pull-out Strength = 0.66 x fy x A; (Tension in kips)

Where fy = Yield strength of lapped reinforcement bars in ksi.

 $A_t$  = Tensile stress area of lapped reinforcement bars. \* = 28 day concrete

BAR SPLICER ASSEMBLIES				
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length	Strength Requirements		
		Min. Capacity kips - tension	Min. Pull-Out Strength kips - tension	
#4	1'-8''	14.7	7.9	
#5	2'-2"	23.0	12.3	
#6	2'-7''	33.1	17.4	
#7	3′-5″	45.1	23.8	
#8	4'-6''	58.9	31.3	
#9	5′-9″	75.0	39.6	
#10	7'-3"	95.0	50.3	
#11	9'-0''	117.4	61.8	

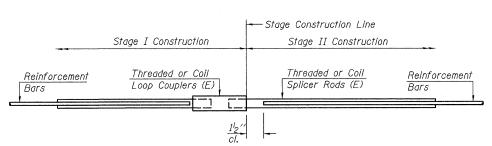

## STANDARD

Bar Size	No. Assemblies Required	Location
#5	28	Deck @ S. Abut.
#5	40	Deck @ Pier 3
#5	40	Deck @ Pier 7
#5	40	Deck @ Pier 11
#5	40	Deck @ Pier 15
#5	40	Deck @ Pier 18
#5	40	Deck @ Pier 21
#5	40	Deck © Pier 24
#5	28	Deck @ S. Abut.

ringroup Excellence through Ownershi


BURNHAM AVE OVER STATE ST, R.R. & RIVER FAU RTE 2943 SECTION 1212.8-I-1

COOK COUNTY STATION 231+79.04 STRUCTURE NO. 016-0806

ILLINOIS DEPARTMENT OF TRANSPORTATION

BAR SPLICER ASSEMBLY DETAILS

DRAWN BY CHECKED BY



\*\* ONE PIECE Wire Connector

ijijijijiji

WELDED SECTIONS

## BAR SPLICER ASSEMBLY ALTERNATIVES

\*\*Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

-Washer Face <u>"B"</u> INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt.

Stage Construction Line

-Foam Plugs

Threaded or Coil

Splicer Rods (E)


<u>"A"</u>

<u>Template</u>

Forms-


"B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

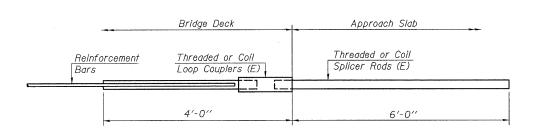

FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

Bar Splicer for #5 bar Min. Capacity = 23.0 kips - tension Min. Pull-out Strength = 12.3 kips - tension No. Required = 0

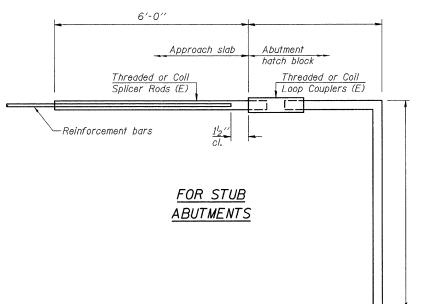

Bar Splicer for #5 bar Min. Capacity = 23.0 kips - tension Min. Pull-out Strength = 12.3 kips - tension No. Required = 0

BSD-1

10-1-08

200 West Front Street Wheaton, IL 60187

DATE: 1-14-2009