


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BILL OF MATERIAL

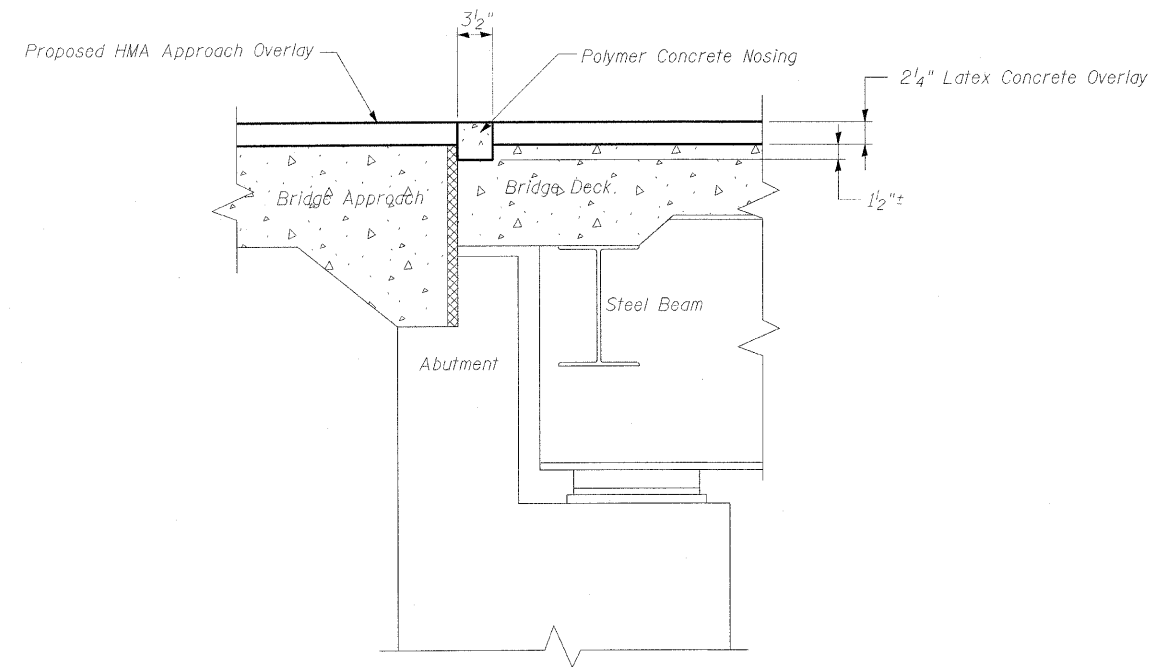

ITEM	UNIT	QUANTITY
Polymer Concrete	Cu. Ft.	9.3

CONCRETE NOSING DETAIL
AT BRIDGE ABUTMENTS

Notes: When the polymer concrete nosing is to be installed adjacent to a deck overlay, the nosing shall be installed after the overlay is placed.

Polymer Concrete must be placed in direct contact with the concrete deck. Removal of all HMA or other material that may be adhered to the Polymer Concrete contact areas is required. The cost for this work shall be included in the pay item for Polymer Concrete.

BRIDGE DECK AND
APPROACH SLAB REPAIRS II
STRUCTURE NO. 016-0919

DESIGNED <i>JWK</i>	<u>January, 2010</u>
CHECKED <i>JMH</i>	EXAMINED _____
DRAWN <i>TWR</i>	ENGINEER OF STRUCTURAL SERVICES
CHECKED <i>JWK</i>	PASSED _____
	ENGINEER OF BRIDGES AND STRUCTURES

SHEET NO. S5 OF S6 SHEETS	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	1631	2009-123I	COOK	12	9
			CONTRACT NO. 60J77		
ILLINOIS FED. AID PROJECT					