



**EXISTING CONDITIONS**  
 EXISTING FLOWLINE  
 3' (TYP.)  
 EARTH EXCAVATION  
 COMB. CONCRETE CURB AND GUTTER REMOVAL  
 SAWCUT EXISTING CURB & GUTTER (TYP.)  
 HOT-MIX ASPHALT SURFACE REMOVAL (AS NECESSARY)

**PROPOSED CONDITIONS**  
 CRUSHED NATURAL STONE PATH SURFACE, 4"  
 SIDE CURB  
 PCC SIDEWALK 5 INCH  
 DETECTABLE WARNINGS  
 DEPRESSED CURB  
 COMB. CONCRETE CURB AND GUTTER, TYPE B-V.12  
 MATCH EXISTING CURB AND FLOWLINE (TYP.)  
 HOT-MIX ASPHALT SURFACE COURSE, MIX "D", NTO (HAND METHOD)

**NOTES**  
 1. MATCH EXISTING FLOWLINES AT GUTTER LIMITS  
 2. SIDE CURB IS INCIDENTAL TO PCC SIDEWALK 5 INCH  
 3. RAMP SLOPE MUST BE NO GREATER THAN 1:12  
 4. CURB RAMPS MUST MEET ALL REQUIREMENTS OF IDOT STANDARD 424001-05

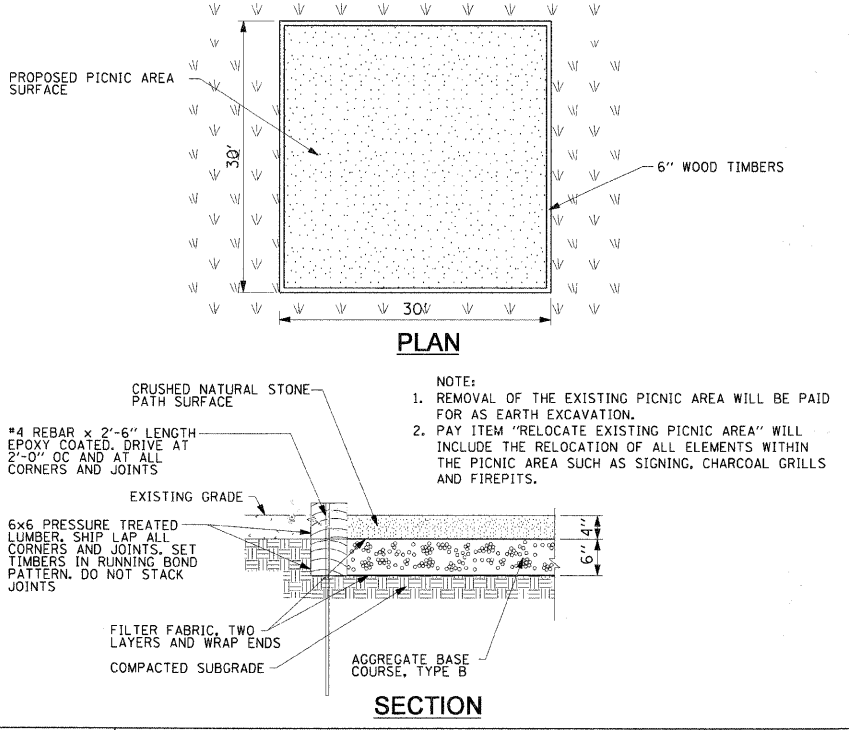

**NOTE:**  
 1. REMOVAL OF THE EXISTING PICNIC AREA WILL BE PAID FOR AS EARTH EXCAVATION.  
 2. PAY ITEM "RELOCATE EXISTING PICNIC AREA" WILL INCLUDE THE RELOCATION OF ALL ELEMENTS WITHIN THE PICNIC AREA SUCH AS SIGNING, CHARCOAL GRILLS AND FIREPITS.

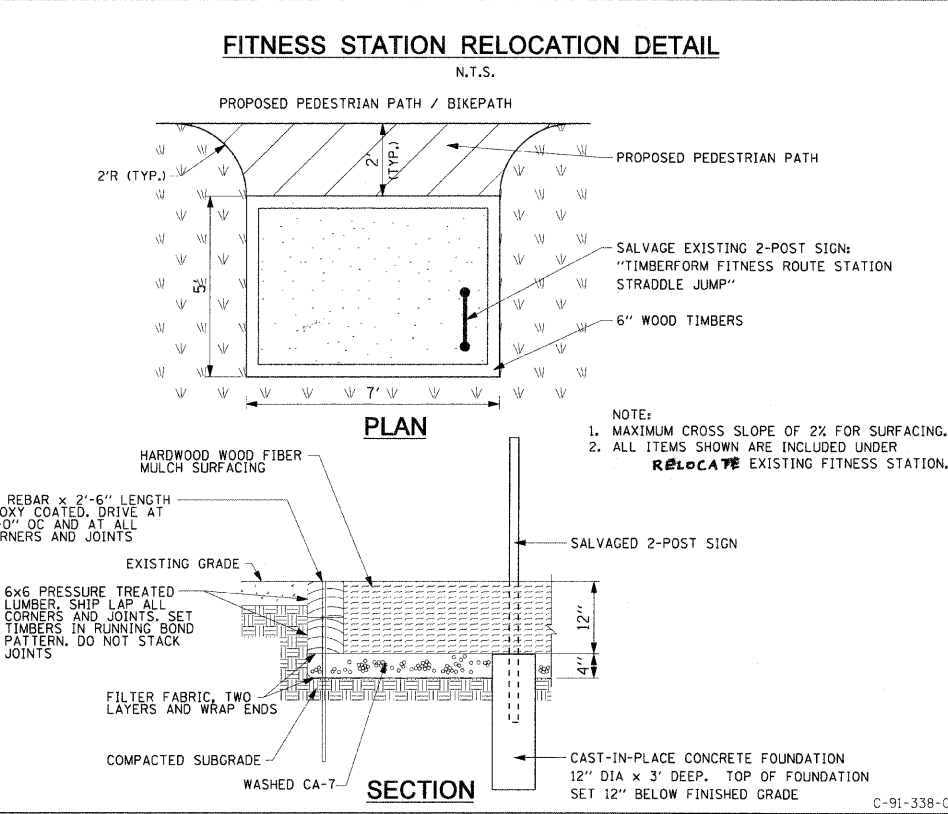

**NOTE:**  
 1. MAXIMUM CROSS SLOPE OF 2% FOR SURFACING.  
 2. ALL ITEMS SHOWN ARE INCLUDED UNDER **RELOCATE** EXISTING FITNESS STATION.

12/01/2009 \\uschof\p207\p60099576\p60099576\_V300\_cad\961.dwg\shopeet\04\_10\1021.dwg - smt - 0.dwg

<b>AECOM</b>	USER NAME = ozoanqab	DESIGNED - BMC	REVISED -
	PLOT SCALE =	DRAWN - LM	REVISED -
	PLOT DATE = 12/01/2009	CHECKED - SLW	REVISED -
		DATE = 12/01/2009	REVISED -

<b>CIVIL DETAILS</b>		F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			07-00246-00-BT	COOK	81	41
SCALE:		SHEET NO. OF SHEETS	STA.	TO STA.		
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION		ITEM NO. 102121		CONTRACT NO. 63423		
C-91-338-07		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				