

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
S.B.L. F.A.	(3)BR-1	LASALLE	44	16
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-		

SHEET NO. 6
OF 23 SHEETS

CONTRACT NO. 66619

NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
End West Appr. Slab	418+93.00	-18.42	633.51
A	419+03.00	-18.42	633.56
B	419+13.00	-18.42	633.61
Back West Abutment	419+23.00	-18.24	633.64

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End West Appr. Slab	418+93.00	-12.00	633.65
A	419+03.00	-12.00	633.70
B	419+13.00	-12.00	633.74
Back West Abutment	419+23.00	-12.00	633.78

STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations
End West Appr. Slab	418+93.00	-1.83	633.81
A	419+03.00	-1.83	633.86
B	419+13.00	-1.83	633.90
Back West Abutment	419+23.00	-1.83	633.94

CENTERLINE OF ROADWAY & P.G.L.


Location	Station	Offset	Theoretical Grade Elevations
End West Appr. Slab	418+93.00	0.00	633.84
A	419+03.00	0.00	633.88
B	419+13.00	0.00	633.93
Back West Abutment	419+23.00	0.00	633.96

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End West Appr. Slab	418+93.00	12.00	633.65
A	419+03.00	12.00	633.70
B	419+13.00	12.00	633.74
Back West Abutment	419+23.00	12.00	633.78

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
End West Appr. Slab	418+93.00	18.42	633.51
A	419+03.00	18.42	633.56
B	419+13.00	18.42	633.61
Back West Abutment	419+23.00	18.24	633.64

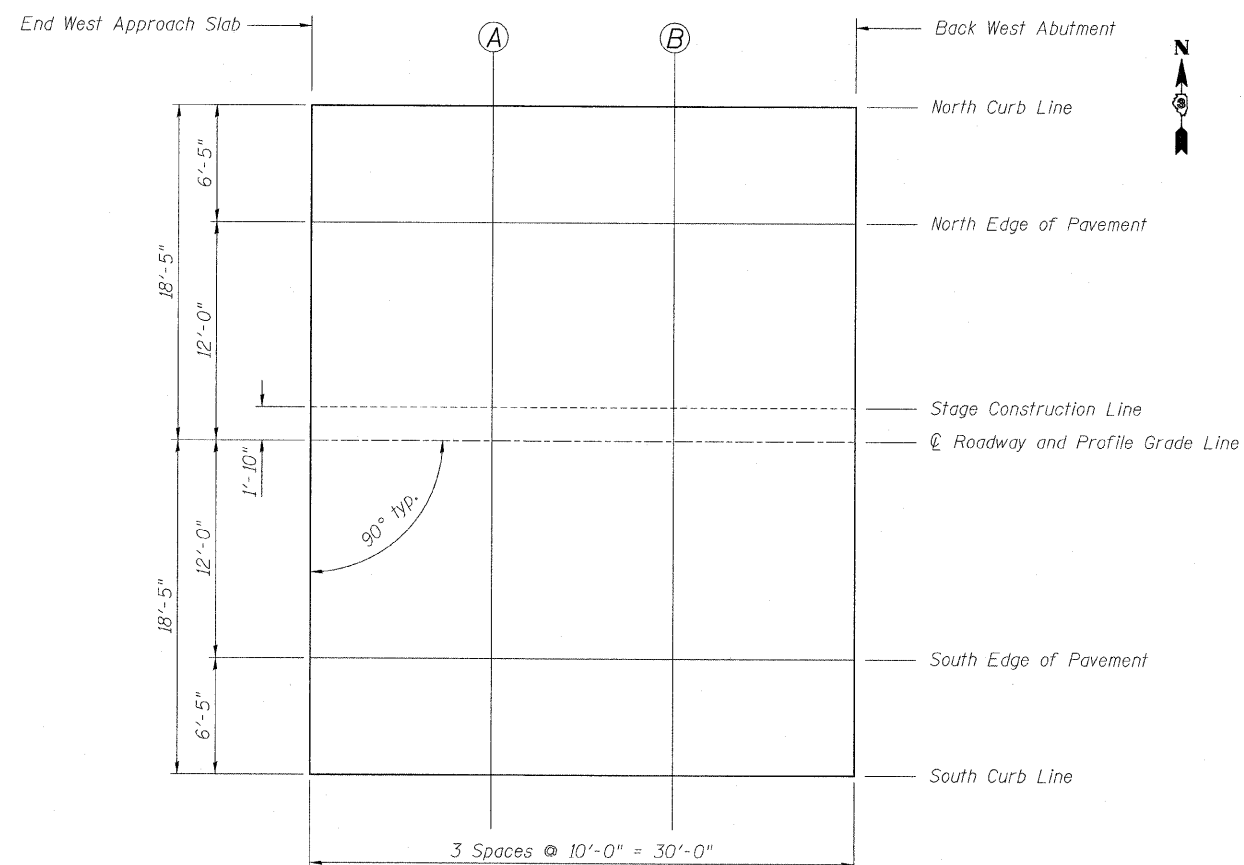

PLAN

TOP OF WEST APPROACH SLAB ELEVATIONS
US ROUTE 52 AND IL ROUTE 23 OVER
CROOKED LEG CREEK
F.A.P. ROUTE 68 SECTION (3) BR-1
LASALLE COUNTY
STATION 419+80.00
STRUCTURE NUMBER 050-0240