

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 7 OF 23 SHEETS
S.R.L. F.A.	(3)BR-1	LASALLE	44	17	
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT	CONTRACT NO. 66619		

NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Back East Abutment	420+37.00	-18.42	633.61
A	420+47.00	-18.42	633.57
B	420+57.00	-18.42	633.52
End East Appr. Slab	420+67.00	-18.24	633.46

NORTH EDGE OF PAVEMENT


Location	Station	Offset	Theoretical Grade Elevations
Back East Abutment	420+37.00	-12.00	633.74
A	420+47.00	-12.00	633.70
B	420+57.00	-12.00	633.65
End East Appr. Slab	420+67.00	-12.00	633.60

STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations
Back East Abutment	420+37.00	-1.83	633.90
A	420+47.00	-1.83	633.86
B	420+57.00	-1.83	633.81
End East Appr. Slab	420+67.00	-1.83	633.75

CENTERLINE OF ROADWAY & P.G.L.

Location	Station	Offset	Theoretical Grade Elevations
Back East Abutment	420+37.00	0.00	633.93
A	420+47.00	0.00	633.89
B	420+57.00	0.00	633.84
End East Appr. Slab	420+67.00	0.00	633.78

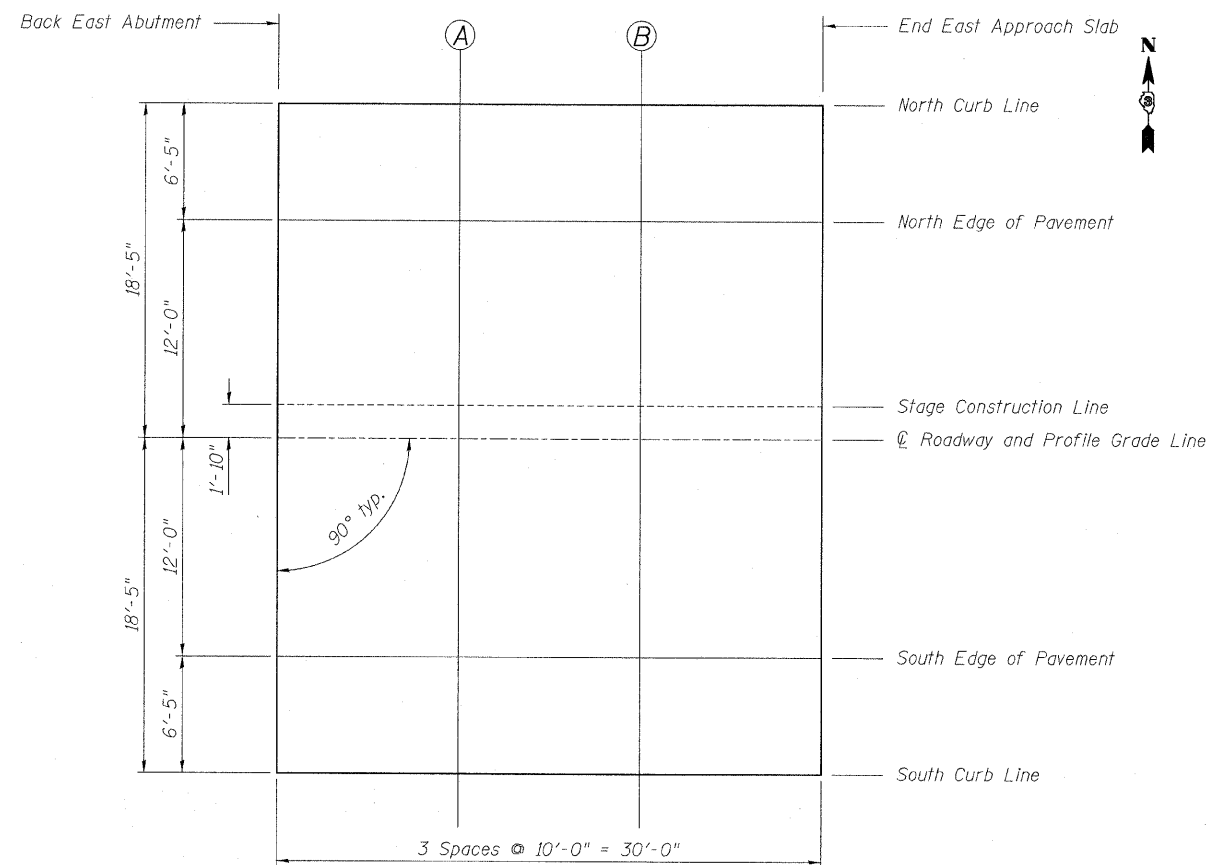

PLAN

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Back East Abutment	420+37.00	12.00	633.74
A	420+47.00	12.00	633.70
B	420+57.00	12.00	633.65
End East Appr. Slab	420+67.00	12.00	633.60

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Back East Abutment	420+37.00	18.42	633.61
A	420+47.00	18.42	633.57
B	420+57.00	18.42	633.52
End East Appr. Slab	420+67.00	18.24	633.46

TOP OF EAST APPROACH SLAB ELEVATIONS
US ROUTE 52 AND IL ROUTE 23 OVER
CROOKED LEG CREEK
F.A.P. ROUTE 68 SECTION (3) BR-1
LASALLE COUNTY
STATION 419+80.00
STRUCTURE NUMBER 050-0240