


NOTE:
FOR NOTES SEE SHEET S5 OF S6

BILL OF MATERIALS

BAR	NO.	SIZE	LENGTH	SHAPE
h2(E)	48	#5	26'-6"	—
h3(E)	12	#5	25'-9"	—
h5(E)	6	#5	18'-5"	—
h6(E)	6	#5	17'-5"	—
d(E)	80	#4	2'-0"	□
v1(E)	574	#6	2'-10"	—
ITEM			UNIT	QUANTITY
REINFORCEMENT BARS (EPOXY COATED)			POUND	4428
CONCRETE SUPERSTRUCTURE			CU. YDS.	21
BRIDGE HAND RAIL REMOVAL			FOOT	286
DRILL 1" Ø HOLES (***)			EACH	574
PEDESTRIAN RAILING			FOOT	286

(***) FOR INFORMATION ONLY. COST INCLUDED WITH REINFORCEMENT BARS (EPOXY COATED)

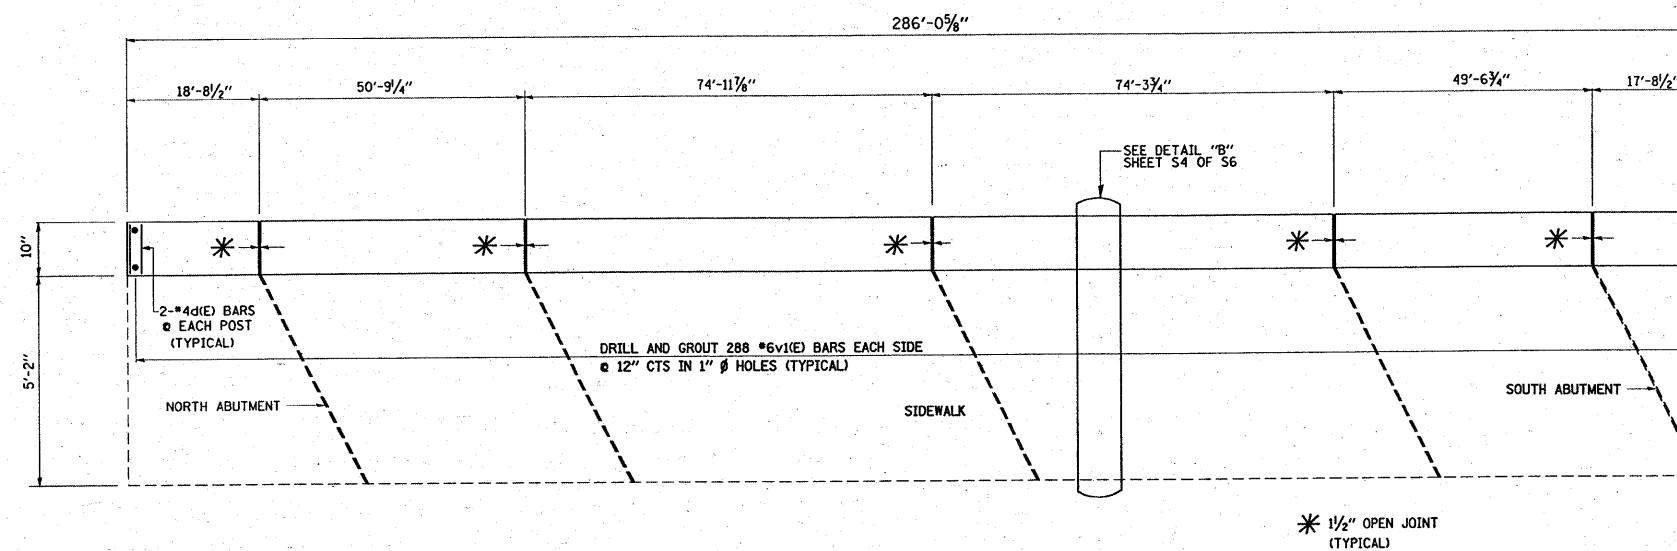

MINIMUM BAR LAPS

SIZE	LENGTH
#4	1'-8"
#5	2'-2"
#6	2'-7"