

SUMMARY OF QUANTITIES

ITEM NO.	DESCRIPTION	UNIT	TOTAL QUANTITIES	AS BUILT QUANTITIES
AR150510	ENGINEER'S FIELD OFFICE	L.S.	1	
AR161900	REMOVE CLASS C FENCE	L.F.	1,721	
AR162504	CLASS E FENCE 4'	L.F.	4,867	
AR162606	CLASS E GATE-6'	EACH	8	
AR162610	CLASS E GATE-10'	EACH	1	
AR162620	CLASS E GATE-20'	EACH	1	
AR162724	ELECTRIC GATE-24'	EACH	1	
AR162900	REMOVE CLASS E FENCE	L.F.	2,663	
AR162910	REMOVE CLASS E GATE	EACH	11	
AR501604	4" PCC SIDEWALK	S.F.	230	
AR701900	REMOVE PIPE	L.F.	20	
AR800467	GATE OPERATOR	EACH	1	
AR800524	CLASS E MANUAL SLIDE GATE	EACH	2	
AR910200	ROADWAY SIGN	EACH	4	

INDEX TO SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	SUMMARY OF QUANTITIES AND INDEX TO SHEETS
3	PROPOSED SAFETY PLAN
4	EXISTING FENCE REMOVAL PLAN
5	PROPOSED FENCING PLAN
6	PROPOSED DETAIL SHEET
7	ELECTRICAL LEGEND AND ABBREVIATIONS
8	TERMINAL GATE ELECTRICAL PLAN
9	EXISTING TERMINAL GATE ELECTRICAL ONE LINE DIAGRAM
10	PROPOSED TERMINAL GATE ELECTRICAL ONE LINE DIAGRAM
11	PROPOSED GATE OPERATOR DETAILS - TERMINAL GATE
12	SOARING CLUB GATE ELECTRICAL PLAN
13	SOARING CLUB GATE ELECTRICAL ONE LINE DIAGRAM
14	PROPOSED ELECTRIC SLIDE GATE DETAILS - SOARING CLUB
15	CARD READER, BOLLARD, & GATE OPERATOR DETAILS

DATE	REVISION	BY

MID-AMERICAN AIR CENTER
LAWRENCEVILLE-VINCENNES AIRPORT
LAWRENCEVILLE, ILLINOIS


IL PROJ.: LWV-3869 A.I.P. PROJ.: 3-17-0061-B15

Hanson Project No.	08A0185D_0800	LAYOUT	JSL	12/10/08
Filename	R-002FLP.DWG	DRAWN	BAK	12/10/08
Scale	NOT TO SCALE	REVIEWED	JSL	01/20/09
Date	01/20/09			



FRONTAL AREA
FENCE INSTALLATION

SUMMARY OF QUANTITIES
AND
INDEX TO SHEETS

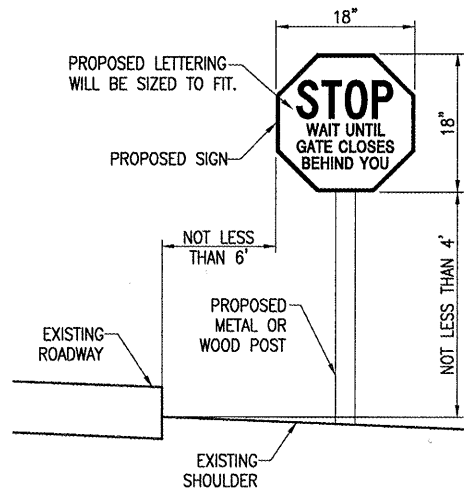


TYPICAL SLIDE GATE STOP SIGN

NOT TO SCALE

SLIDE GATE STOP SIGN NOTE

THE PROPOSED SLIDE GATE STOP SIGN WILL BE LOCATED WITHIN 20' (MINIMUM) TO 40' (MAXIMUM) DISTANCE FROM THE PROPOSED SLIDE GATE. ONE SIGN WILL BE INSTALLED ON BOTH SIDES OF THE PROPOSED SLIDE GATE. EXACT LOCATION WILL BE DETERMINED BY THE AIRPORT MANAGER. THESE SIGNS WILL BE PAID FOR UNDER ITEM NO. AR910200 "ROADWAY SIGN" - PER EACH.



SIGN DETAIL

"NOT TO SCALE"

NOTE:
0.08 GA. ALUMINUM ALLOY SHEET LETTERING COLOR SHALL BE RED. EACH GATE SHALL REQUIRE ONE SIGN. EVERY 100' OF FENCE SHALL REQUIRE ONE SIGN.

THE COST TO FURNISH AND INSTALL THE SIGNS SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.