F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
374	3268F-R-1	COOK	279	131
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 62387

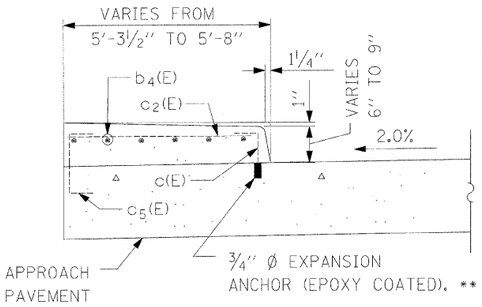

SECTION D-D

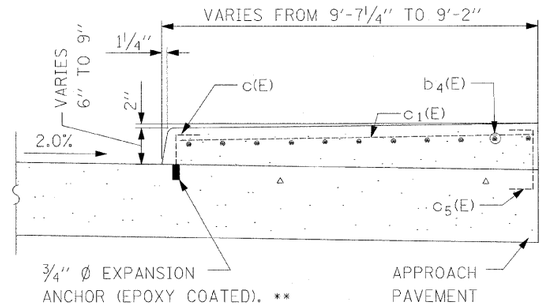

SECTION I-I



BAR c(E)



BAR c5(E)

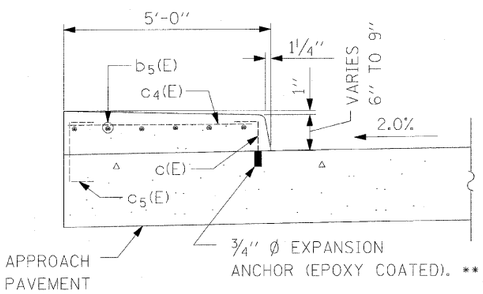

SECTION F-F

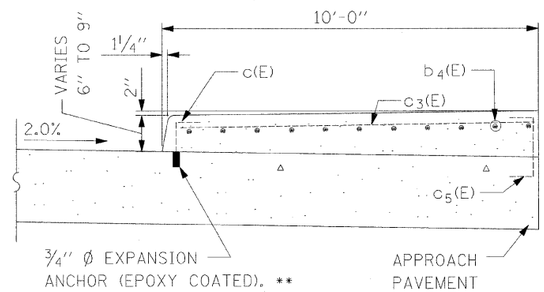

SECTION G-G

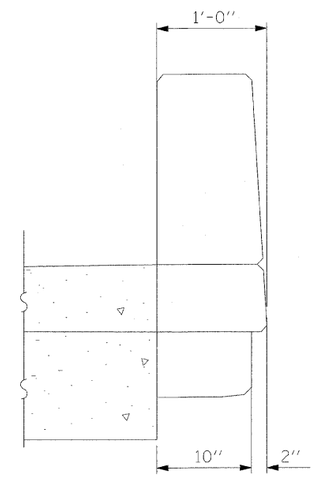

SECTION H-H

BILL OF MATERIAL

	BAR	NO.	SIZE	LENGTH	SHAPE
	a(E)	344	#9	29'-6"	
	a_1(E)	173	#5	29'-6"	
	a_2(E)	174	#4	6'-8"	
	a_3(E)	174	#4	5'-8"	
	b(E)	62	#5	41'-9"	
	b_1(E)	16	#4	41'-9"	
	b_2(E)	16	#4	41'-6"	
	b_3(E)	62	#5	41'-6"	
	b_4(E)	28	#5	29'-8"	
	b_5(E)	6	#5	31'-0"	
	b_6(E)	7	#4	8'-0"	
	b_7(E)	26	#5	8'-0"	
	c(E)	125	#5	1'-4"	
	c_1(E)	31	#5	9'-3"	
	c_2(E)	31	#5	5'-4"	
	c_3(E)	31	#5	9'-8"	
	c_4(E)	32	#5	4'-8"	
	c_5(E)	125	#5	2'-0"	
	h(E)	72	#5	41'-7"	
	h_1(E)	48	#5	27'-5"	
*	BAR SPLICERS			EACH	126
	BRIDGE APPROACH PAVEMENT (SPECIAL)			S.Y.	560
*	CONCRETE SUPERSTUCTURES			C.Y.	21
*	REINFORCEMENT BARS, EPOXY COATED			LB	54970

REINFORCEMENT BARS DESIGNATED (E) SHALL BE EPOXY COATED.

* ITEMS INCLUDED IN THE COST FOR BRIDGE APPROACH PAVEMENT (SPECIAL).

** COST OF MACHINING BAR c(E) INCLUDED WITH BRIDGE APPROACH PAVEMENT (SPECIAL).

REVISIONS	
NAME	DATE

STV Incorporated
engineers/architects/scientists/construction managers
200 W Monroe - Suite 1650
Chicago, Illinois 60606

ILLINOIS DEPARTMENT OF TRANSPORTATION
IL ROUTE 21
MILWAUKEE AVE. OVER DESPLAINES RIVER
COOK COUNTY - F.A.P. ROUTE 374
SN 016-6566

BRIDGE APPROACH PAVEMENT DETAILS

SCALE: NOT TO SCALE — DRAWN BY BTO
DATE 02/05/08 — CHECKED BY JAN