



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	19RS-4	SHELBY	33	31
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT			

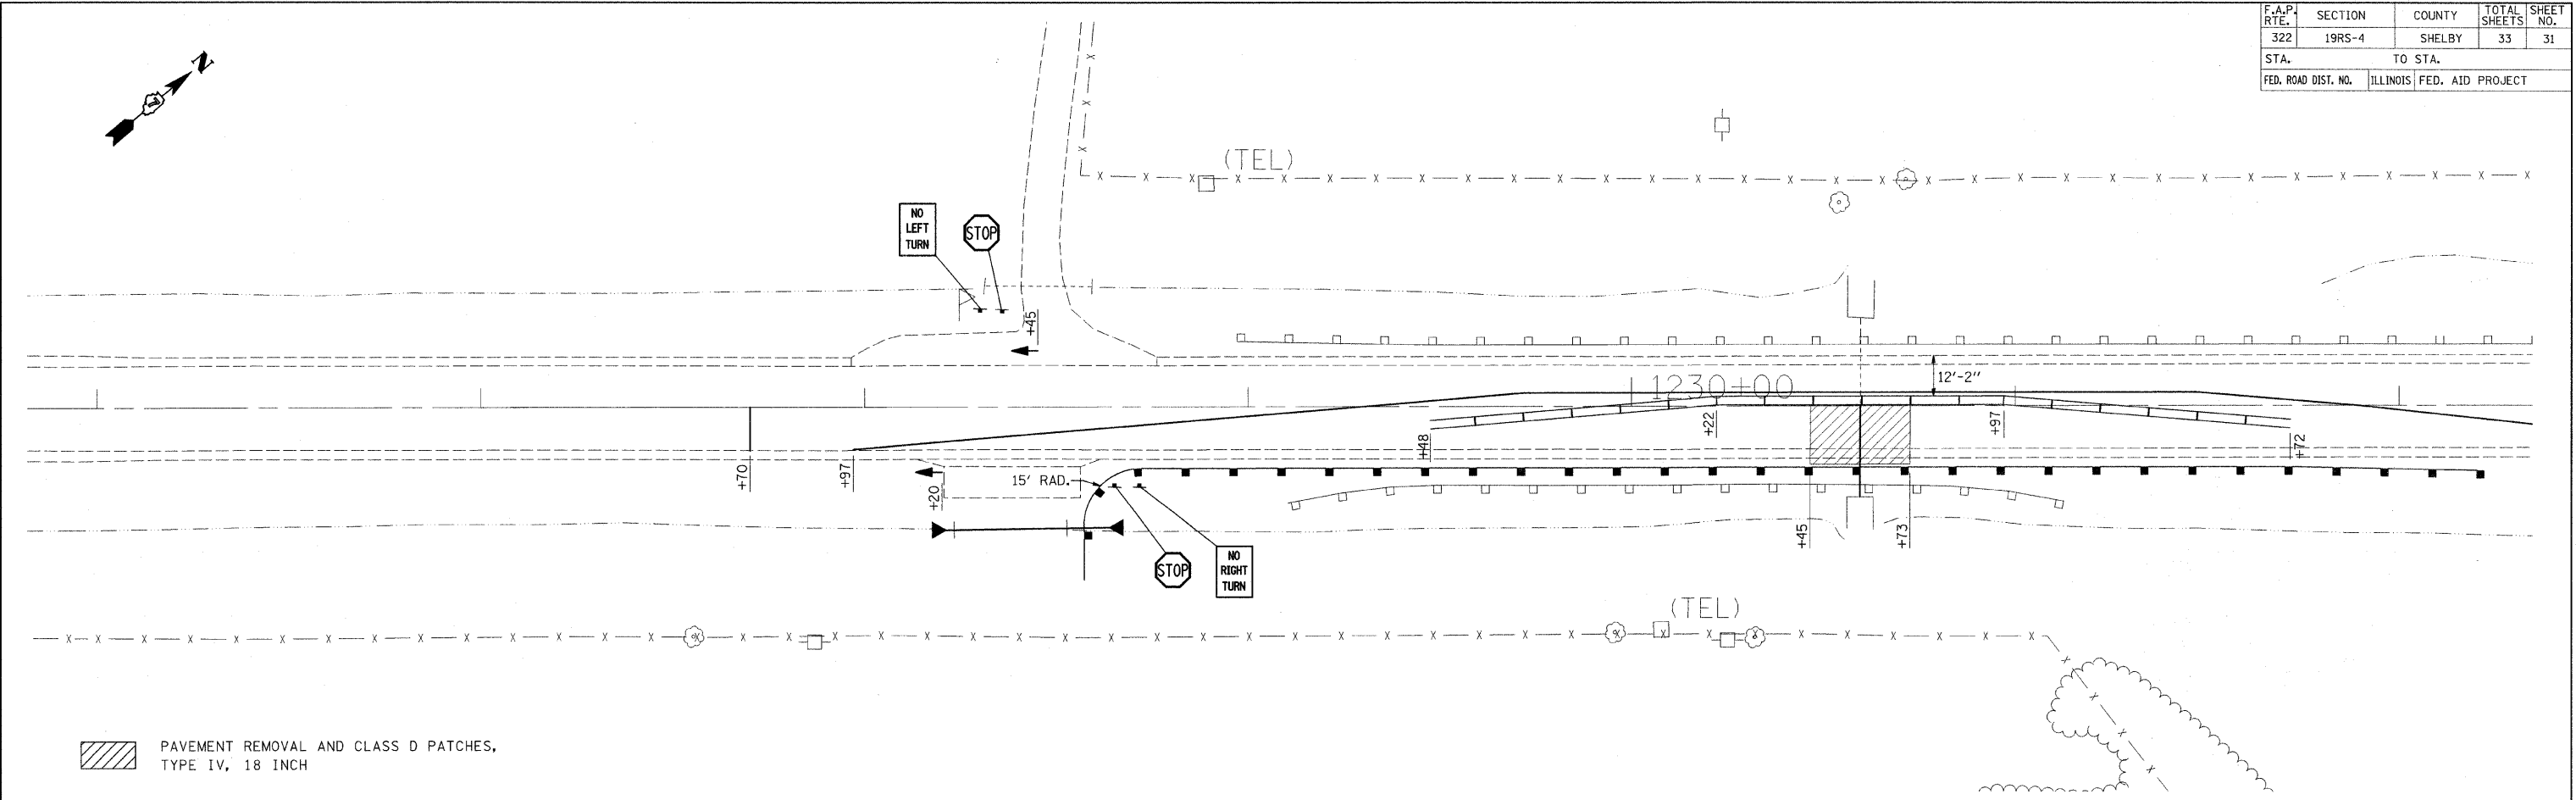

PAVEMENT REMOVAL AND CLASS D PATCHES, TYPE IV, 18 INCH

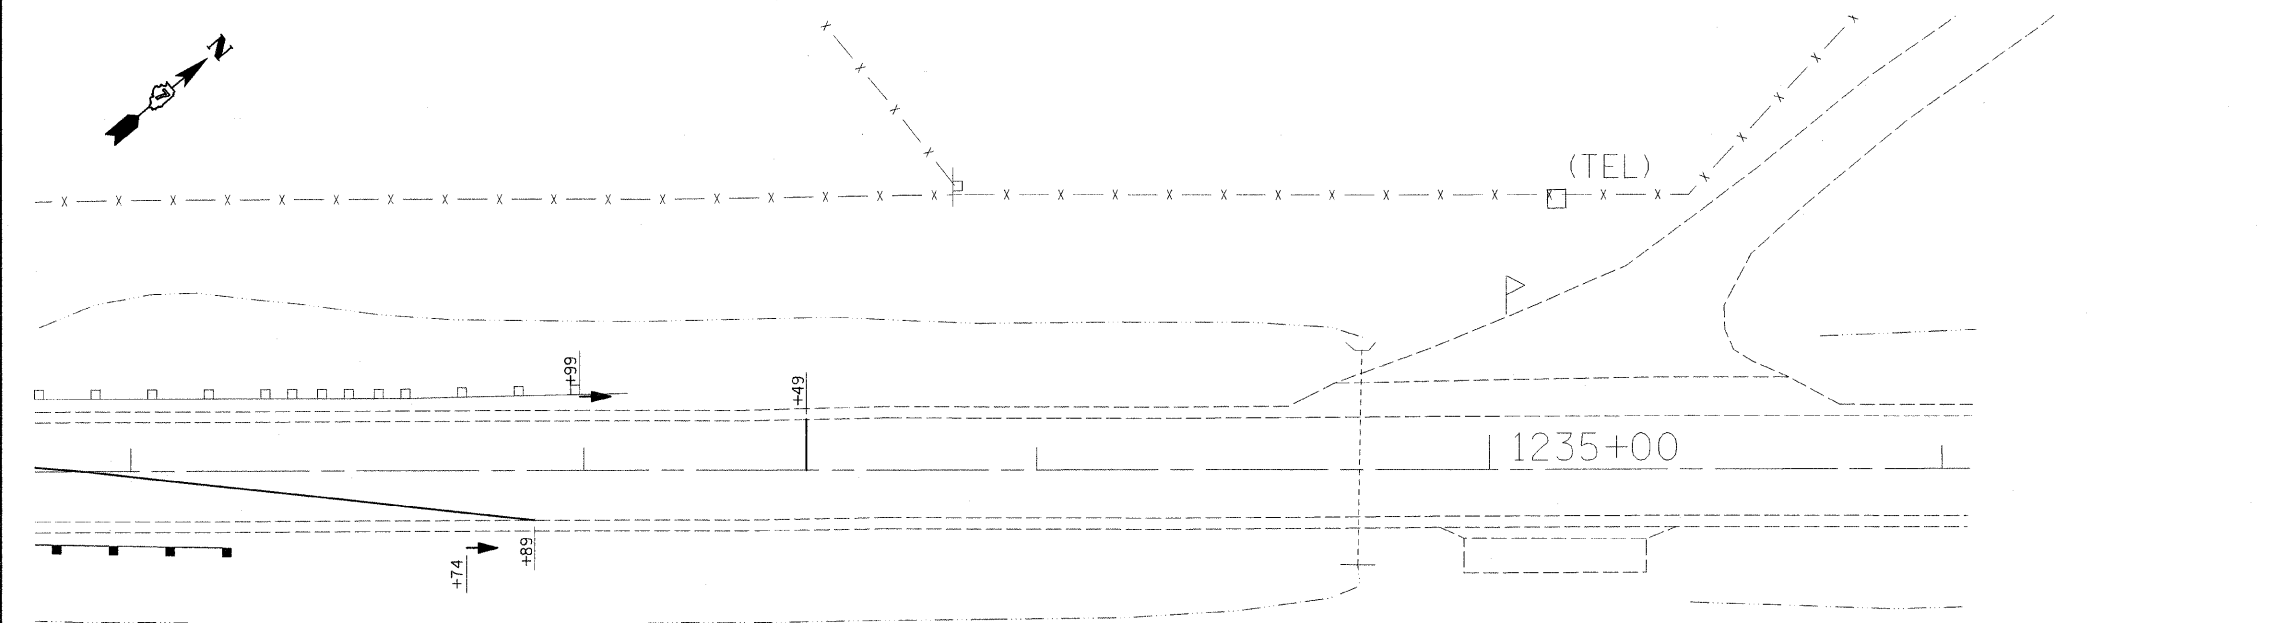

SUGGESTED SEQUENCE OF OPERATION

1. RELOCATE TEMPORARY CONCRETE BARRIERS, SIGNS, ECT. ACCORDING TO TRAFFIC CONTROL STANDARD 701321.
2. PLACE TEMPORARY PAVEMENT MARKING ACCORDING TO TRAFFIC CONTROL STANDARD 701321.
3. REMOVE THE STAGE II PORTION OF THE EXISTING CULVERT, PAVEMENT, AND GUARDRAIL.
4. CONSTRUCT STAGE II PORTION OF THE NEW CULVERT, PATCHING, GUARDRAIL, AND ENTRANCE CULVERT.

RELOCATE TEMPORARY CONCRETE BARRIER		
1229+47.00 TO 1231+72.00	225.0 FOOT	
TOTAL =	225.0 FOOT	

PAVEMENT REMOVAL	
1230+60	46.7 SQ YD
TOTAL =	46.7 SQ YD

PIPE CULVERT, CLASS A, TYPE 1 60"	
1230+60	24.0 FOOT
TOTAL =	24.0 FOOT

CLASS D PATCHES, TYPE IV, 18 INCH	
1230+60	46.7 SQ YD
TOTAL =	46.7 SQ YD

CONCRETE COLLAR	
1230+60	0.8 CU YD
TOTAL =	0.8 CU YD

IMPACT ATTENUATORS, RELOCATE (NON-REDIRECTIVE), TEST LEVEL 3		
1229+47	1.0 EACH	
1231+72	1.0 EACH	
TOTAL =	2.0 EACH	

PIPE CULVERT REMOVAL	
1230+60	24.0 FOOT
TOTAL =	24.0 FOOT

TRENCH BACKFILL	
1230+60	14.6 CU YD
TOTAL =	14.6 CU YD

PAVEMENT MARKING REMOVAL		
1229+35.00 TO 1231+82.00	82.3 SQ FT	
TOTAL =	82.3 SQ FT	

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
STAGE 2 CONSTRUCTION
S.N. 087-8806
 SCALE: VERT. / HORIZ.
 DATE: / / DRAWN BY: / CHECKED BY: /

PLOT DATE = 1/29/2008
 FILE NAME = c:\p\proj\ss\74144\dwg\stage2_74144.dgn
 PLOT SCALE = 28.0000' / IN.
 USER NAME = esb@ctm.com