



Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

April 10, 2008

SUBJECT: FAS 642 (CH 18)
Project ACHPP-HPP-ACSR-642(121)
Section 00-00127-00-WR
Coles County
Contract No. 95457
Item 122
April 25, 2008 Letting
Addendum (A)

TO PROSPECTIVE BIDDERS:

Due to clarify information necessary to revise the following:

Proposal – Revised Index of Special Provisions & Added Saw Cut Detail.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Very truly yours,

Eric Harm
Interim Engineer of Design and Environment

A handwritten signature in cursive script, reading "Ted B. Walschleger DE".

By: Ted B. Walschleger
Engineer of Project Development
and Implementation

CH 18 RECONSTRUCTION @ IL RTE 121
SECTION: 00-00127-00-WR
COLES COUNTY, ILLINOIS



26.	Obliterate Roadway	8
27.	Construction Layout.....	9
28.	Field Tile Repair: Undistributed Quantities for Miscellaneous Concrete, Concrete Collar, Inlets, Special, Inspection Wells, Storm Sewer, Class B.....	10
29.	Removal Of Unclassified Materials	10
30.	Notification of Road Closure	11
31.	Status Of Utilities To Be Adjusted.....	12
	STORM WATER POLLUTION PREVENTION PLAN	13
*	SAW CUT DETAIL.....	75

* Revised 4-10-08

Contract # 95457
 F.A.S. Route 642 (C.H. 18)
 Section No. 00-00127-00-WR
 Coles County

ADDENDUM 4-10-08
 SAW CUTS:
 LONGITUDINAL CENTER OF EACH LANE
 AND PERPENDICULAR TO CL ACROSS
 PAVEMENT EVERY 8'

DETAIL OF SAWED CONTRACTION JOINT
8' SPACING 5 1/2" PCC C.H. 18

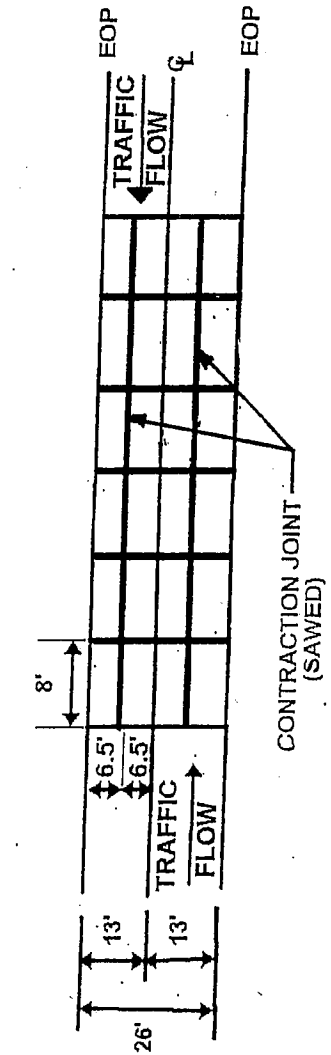

LOCATION:
 C.H. 18 STA. 46 + 00 ~ 120 + 00

THIS WORK WILL BE INCLUDED IN THE CONTRACT UNIT PRICE PER SQUARE YARD FOR PORTLAND CEMENT CONCRETE OVERLAY 5 1/2" WHICH SHALL INCLUDE ALL LABOR AND MATERIAL AS SPECIFIED.