

SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
04-14106-00-BR	WAYNE	12	1
TOWNSHIP ROAD 331			
MARTIN CREEK BRIDGE CONTRACT NO. 95544			

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	PLAN - PROFILE
3 - 4	CROSS SECTIONS
5 - 12	BRIDGE PLANS

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
PLANS FOR  
PROPOSED LOCAL AGENCY IMPROVEMENT  
FEDERAL-AID H.B.P. PROJECT


TOWNSHIP ROAD 331  
SECTION 04-14106-00-BR  
WAYNE COUNTY PROJECT  
C-97-055-08  
PROJECT # BROS-191(054)

THE FOLLOWING STANDARDS ARE A PART OF THESE PLANS AND ARE INCLUDED AFTER SHEET NO. 12.

- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS, AND PATTERNS
- 666001 RIGHT OF WAY MARKERS
- 701901 TRAFFIC CONTROL DEVICES
- BLR 21-7 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES

SUMMARY OF QUANTITIES			X081-2A CODE NO.
QUANTITY	UNIT	ITEM	
0.11	ACRE	TREE REMOVAL, ACRES	20100500
680.00	CU YD	EARTH EXCAVATION	20200100
80.00	CU YD	CHANNEL EXCAVATION	20300100
450.00	CU YD	FURNISHED EXCAVATION	20400800
0.38	ACRE	SEEDING, CLASS 2 (SPECIAL)	25001000
220.00	TON	STONE DUMPED RIPRAP, CLASS A4	28100807
170.00	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
1.00	EACH	REMOVAL OF EXISTING STRUCTURES	50100100
18.20	CU YD	CONCRETE STRUCTURES	50300225
2.10	CU YD	CONCRETE ENCASEMENT	50300280
1200.00	SQ FT	PRECAST PRESTRESSED CONCRETE DECK BEAMS, (27" DEPTH)	50400505
2300.00	POUND	REINFORCEMENT BARS	50800105
100.00	FOOT	STEEL RAILING, TYPE S1	50900205
240.00	FOOT	DRIVING PILES	51202305
240.00	FOOT	FURNISHING STEEL PILES HP 10X42	51201400
1.00	EACH	NAME PLATES	51500100
60.00	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 18"	542D0223
8.00	EACH	FURNISHING AND ERECTING RIGHT-OF-WAY MARKERS	66600105
1.00	L SUM	MOBILIZATION	67100100
1.00	L SUM	TRAFFIC CONTROL & PROTECTION, STANDARD BLR21	70101830

SECTION 04-14106-00-BR  
BEGINS STA. 2+00  
ENDS STA. 6+50  
EX SN 096-3134  
PRO SN 096-3444

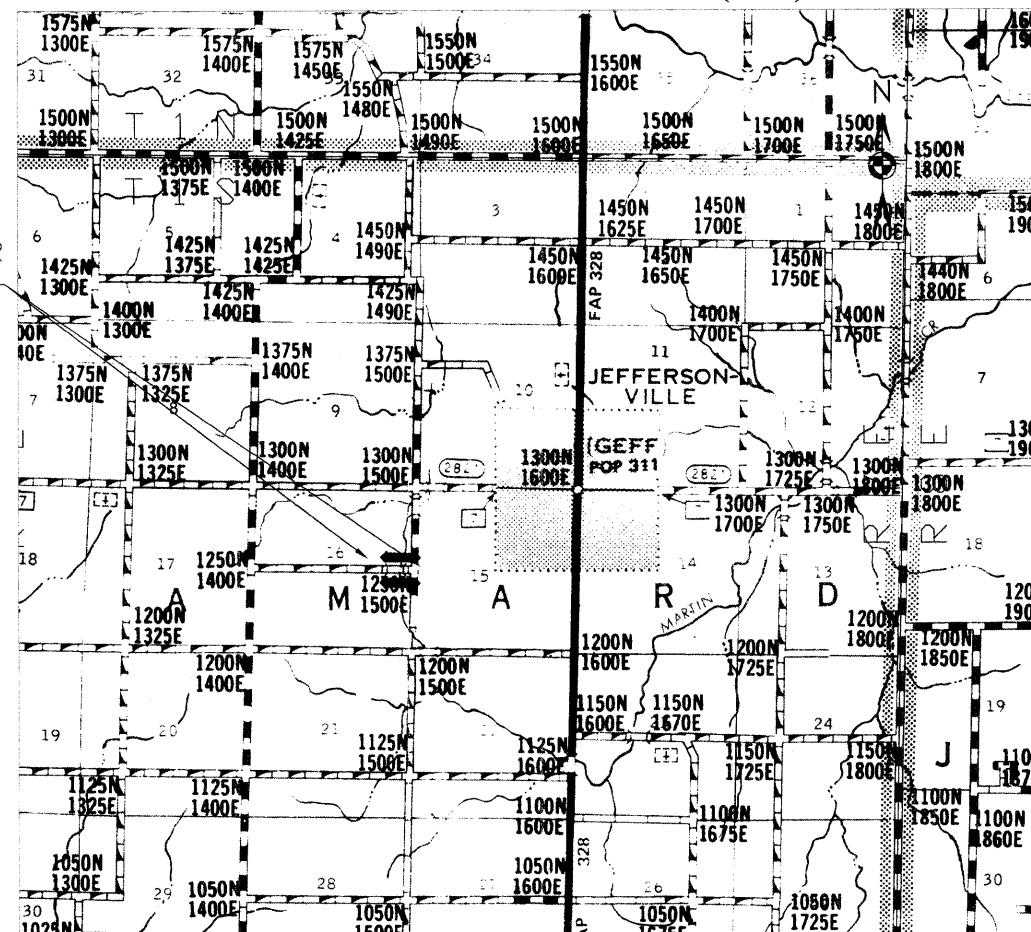

GROSS LENGTH	450.00	FEET	0.085	MILES
OMISSIONS	00.0	FEET	00.00	MILES
NET LENGTH	450.00	FEET	0.085	MILES

BEFORE DIGGING IN ILLINOIS  
...CALL JULIE FIRST AT 1-800-892-0123


JASPER WATER WORKS  
BILL YOUNG, OPERATOR  
CELL PHONE (618)237-0164  
HOME PHONE (618)842-2918

VERIZON  
225 EAST CHESTNUT ST.  
OLNEY, ILLINOIS  
BRIAN VANGUNDY, ENGINEER  
(618)395-6189

WAYNE / WHITE ELECTRIC COOP.  
ROUTE 45 WEST  
FAIRFIELD, ILLINOIS  
AARON HAWLEY, ENGINEER  
(618)-842-2196

FUNCTIONAL CLASS:  
RURAL LOCAL ROAD  
ADT = 25  
DESIGN SPEED = 30 MPH  
EXISTING STRUCTURE NO. 096-3134  
PROPOSED STRUCTURE NO. 096-3444

SCALES

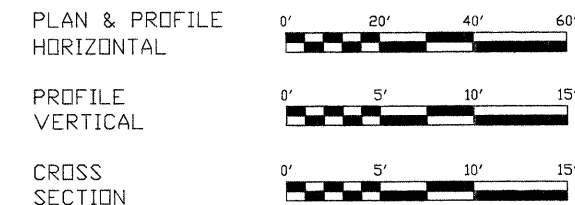

APPROVED 2-25 20 08

*Arthur J. Hoebech*  
COUNTY ENGINEER

*Margaret J. Costello*

PASSED 2/28 20 08

DISTRICT SEVEN ENGINEER OF  
LOCAL ROADS & STREETS

Releasing For  
Bid Based on  
Limited Review

2/28 20 08

*Christopher Reed*  
DEPUTY DIRECTOR OF HIGHWAYS,  
REGION FOUR ENGINEER

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

PLANS PREPARED BY:



*Michael Eugene Neikirk*  
MICHAEL EUGENE NEIKIRK  
ILL. REG. PROF. ENGINEER



062-053893  
REG. NO.  
EXPIRES 11-30-2009

2/25/08  
DATE

CONTRACT NO. 95544