


PROPOSED TYPICAL SECTION US ROUTE 34 STA. 103+82 TO 109+00

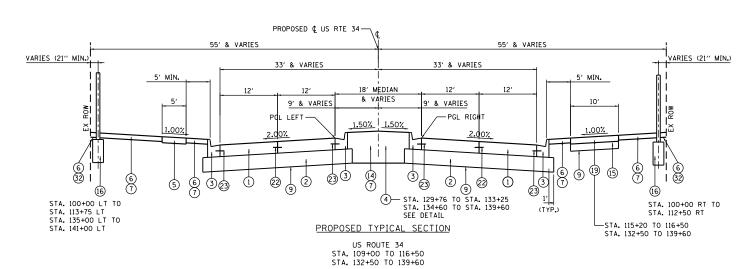

**URS** 

USER NAME = URS	DESIGNED	-	мВ	REVISED -	
	DRAWN	-	KJB	REVISED -	l
PLOT SCALE = 20.0000 '/ in.	CHECKED	-	SPF	REVISED -	l
PLOT DATE = 02/28/2014	DATE	-	02/28/2014	REVISED -	1

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

- 1 PORTLAND CEMENT CONCRETE PAVEMENT 101/2" (JOINTED)
- 2 AGGREGATE SUBGRADE IMPROVEMENT 12"

PROPOSED LEGEND

- 3 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
- 4 CONCRETE MEDIAN TYPE SB-6.24 (MODIFIED) (SEE DETAIL)
- 5 PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH
- (6) TOPSOIL FURNISH AND PLACE 4"
  (TOPSOIL FURNISH AND PLACE 8" WILL BE USED IN ALL AREAS WHERE TREES WILL BE INSTALLED)
- 7 SODDING, SALT TOLERANT
- 8 HOT-MIX ASPHALT (FULL DEPTH), 121/2"

-HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, (IL-9.5MM) (2")

HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70 (10.5")

- 9 GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
- (10) BITUMINOUS MATERIALS (PRIME COAT) AND AGGREGATE (PRIME COAT)
- (11) CONCRETE BARRIER, SINGLE FACE, 34" HEIGHT AND CONCRETE BARRIER BASE (SEE DETAIL)
- (2) PARAPET RAILING, SPECIAL
- (13) BICYCLE RAILING, SPECIAL
- (14) TOPSOIL FURNISH AND PLACE 24"
- (15) AGGREGATE BASE COURSE, TYPE B, 6"
- (6) NOISE ABATEMENT WALL, GROUND MOUNTED
- 17 CAST IN PLACE RETAINING WALL
- (18) TEMPORARY SHEETING (USED TO ACCOMMODATE UTILITY RELOCATION)
- (9) HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (3")
- @ AGGREGATE BASE COURSE, TYPE B
- 21) GRANULAR BACKFILL FOR STRUCTURES
- 2 LONGITUDINAL SAWED JOINT, NO. 8 EPOXY COATED TIE BARS, 30" LONG AT 30" CENTERS, DRILL AND GROUT (INCLUDED IN COST OF PCC PAVEMENT
- 23 LONGITUDINAL CONSTRUCTION JOINT, NO. 8 EPOXY COATED TIE BARS, 24" LONG
- 24 BARRIER WALL MARKERS, TYPE B AT 40' CENTERS
- DRILL AND GROUT NO. 8 EPOXY COATED TIE BARS, 24" LONG AT 24" CENTERS (INCLUDED IN THE COST OF CONCRETE MEDIAN TYPE SB-6.24 (MODIFIED) AND COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24)
- (E) REINFORCED SELECT FILL FOR TEMPORARY MECHANICALLY STABILIZED EARTH RETAINING WALL (INCLUDED IN THE COST OF TEMPORARY MSE WALL)
- 3 SOLDIER PILE RETAINING WALL
- 28 TOPSOIL FURNISH AND PLACE 12"
- 29 AGGREGATE BASE COURSE, TYPE B 8"
- 30 SEEDING, CLASS 3
- 31) EROSION CONTROL BLANKET (SPECIAL)
- 32 SEEDING, CLASS 1

SECTION COUNTY 311 652-A DUPAGE 383 26 PROPOSED TYPICAL SECTIONS CONTRACT NO. 60R06 SHEET NO. OF SHEETS STA.