



RESTORATION OF WORK AREA, RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCIDENTAL TO THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT, HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEEDED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.

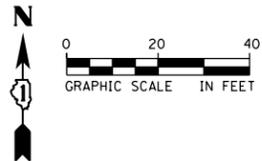

FAR OUT DETECTION ZONE
250' FROM STOP BAR

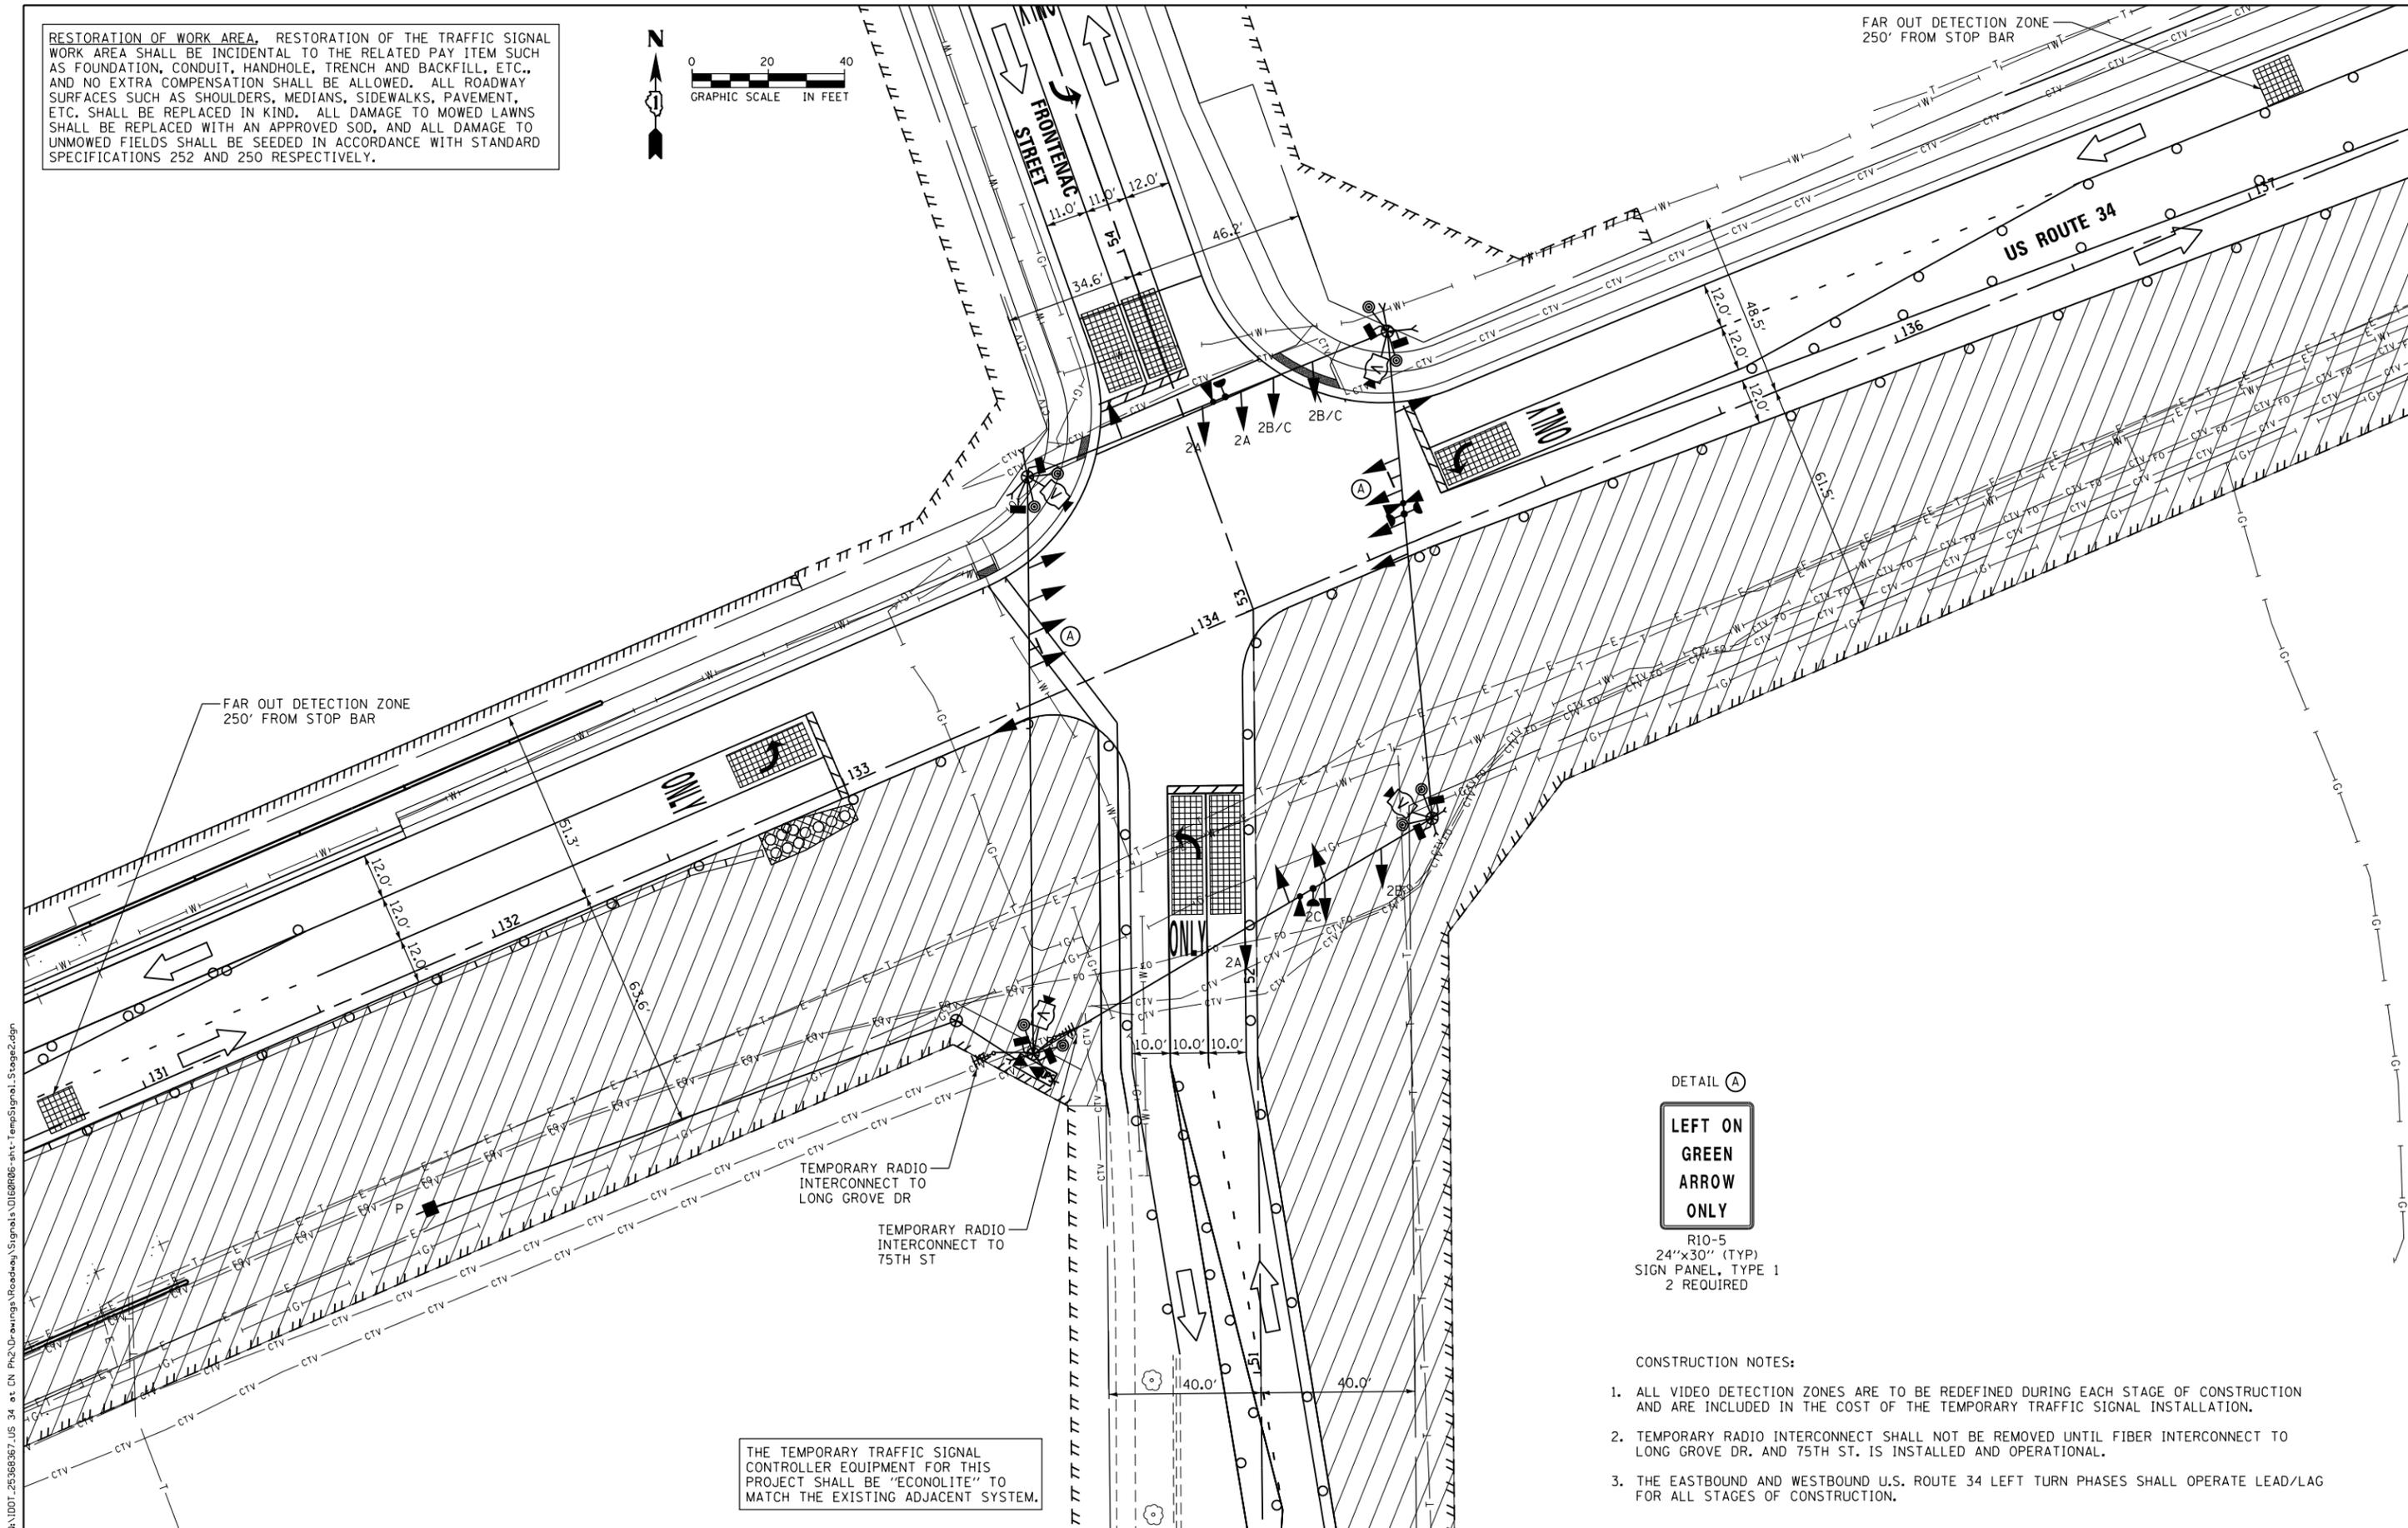

DETAIL (A)
LEFT ON GREEN ARROW ONLY
 R10-5
 24"x30" (TYP)
 SIGN PANEL, TYPE 1
 2 REQUIRED

CONSTRUCTION NOTES:

1. ALL VIDEO DETECTION ZONES ARE TO BE REDEFINED DURING EACH STAGE OF CONSTRUCTION AND ARE INCLUDED IN THE COST OF THE TEMPORARY TRAFFIC SIGNAL INSTALLATION.
2. TEMPORARY RADIO INTERCONNECT SHALL NOT BE REMOVED UNTIL FIBER INTERCONNECT TO LONG GROVE DR. AND 75TH ST. IS INSTALLED AND OPERATIONAL.
3. THE EASTBOUND AND WESTBOUND U.S. ROUTE 34 LEFT TURN PHASES SHALL OPERATE LEAD/LAG FOR ALL STAGES OF CONSTRUCTION.

THE TEMPORARY TRAFFIC SIGNAL CONTROLLER EQUIPMENT FOR THIS PROJECT SHALL BE "ECONOLITE" TO MATCH THE EXISTING ADJACENT SYSTEM.

FILE NAME = Q:\11001_25368367_US 34 at CN Ph2\Drawings\Roadway\Signals\01687006-sht-TempSignal_Stage2.dgn



USER NAME = URS	DESIGNED - MB	REVISED -
PLOT SCALE = 48.0000' / in.	DRAWN - KJB	REVISED -
PLOT DATE = 02/28/2014	CHECKED - SPF	REVISED -
	DATE - 02/28/2014	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY TRAFFIC SIGNAL INSTALLATION - STAGE 2
US 34 (OGDEN AVENUE) AND FRONTENAC STREET

SCALE: 1"=20' SHEET NO. 4 OF 6 SHEETS STA. 131+00 TO STA. 137+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
311	652-A	DUPAGE	383	151
CONTRACT NO. 60R06				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				