
GENERAL NOTES


- 1. Reinforcement bars designated (E) shall be epoxy coated.
- 2. Form liner textured surface shall be applied to the wingwalls, retaining walls and noise abatement walls. The finish shall consist of a rolled Ashlar Stone finish and shall have a minimum 0.75 in impression.
- 3. The pattern produced on the exposed surfaces of the concrete wingwalls, retaining walls and the noise abatement walls shall be identical. The concrete stain applied to the surfaces of all of those items shall also be identical. The Contractor shall provide all necessary coordination and direction with its vendor manufacturing the noise abatement walls to assure the same concrete form liners and stain are used for them as those for the cast-in-place wingwalls and retaining walls.

INDEX OF SHEETS

- NW 1 General Plan and Elevation
- General Notes, Index of Sheets and Bill of Material NW-2
- Temporary MSE Retaining Wall Details NW-3
- NW-4 Detailed Plan and Elevation 1 Detailed Plan and Elevation 2
- NW-5 NW-6 Detailed Plan and Elevation 3
- Detailed Plan and Elevation 4 NW-7
- NW-8 Detailed Plan and Elevation 5
- NW-9 Detailed Plan and Elevation 6
- NW-10 Miscellaneous Details
- NW-11 Soil Borings 1
- NW-12 Soil Borings 2
- NW-13 Soil Borings 3
- NW-14 Soil Borings 4
- NW-15 Soil Borings 5 NW-16 Soil Borings 6

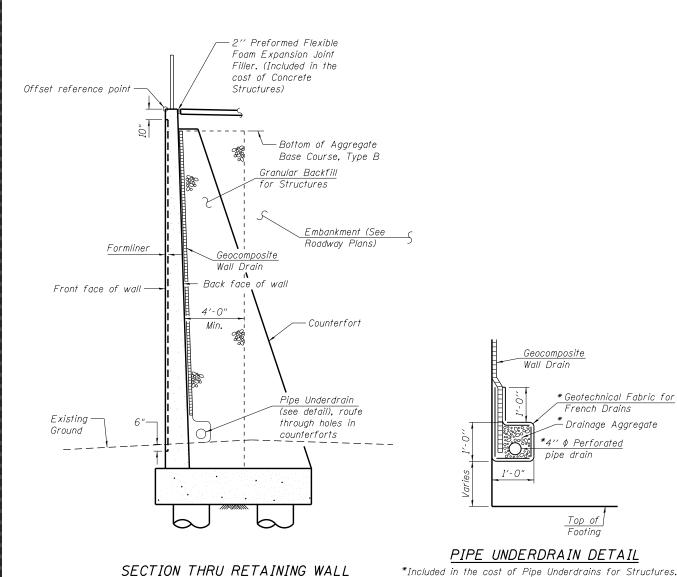

*Included in the cost of Pipe Underdrains for Structures.

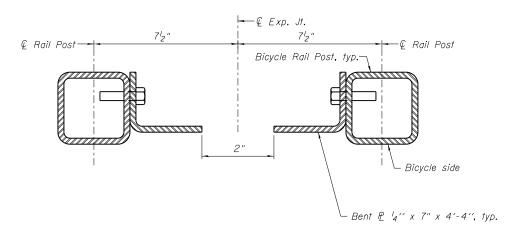



|--|

	USER NAME =	DESIGNED - KMP	REVISED		GENERAL NOTES, BILL OF MATERIALS, AND INDEX OF SHEETS	F.A.P. SECTION	COUNTY TOTAL SHEET
		CHECKED - AMK	REVISED	STATE OF ILLINOIS	STRUCTURE NO. 022–W068	311 652-A	DuPAGE 383 218
3	PLOT SCALE =	DRAWN - BAR	REVISED	DEPARTMENT OF TRANSPORTATION	STRUCTURE NU. 022-00000		CONTRACT NO. 60R06
	PLOT DATE = 02/28/2014	CHECKED - NPP	REVISED		SHEET NO. NW-2 OF NW-16 SHEETS	ILLINOIS FED. AID PROJECT	

TOTAL BILL OF MATERIALS

Item	Unit	Total
Structure Excavation	Cu. Yd.	1,762
Concrete Structures	Cu. Yd.	1,220.8
Form Liner Textured Surface	Sq. Ft.	8,525
Stud Shear Connectors	Each	159
Reinforcement Bars	Pound	292,740
Reinforcement Bars, Epoxy Coated	Pound	174,600
Bicycle Railing, Special	Foot	592
Parapet Railing, Special	Foot	588
Name Plates	Each	1
Drilled Shaft in Soil	Cu. Yd.	1,182
Drilled Shaft in Rock	Cu. Yd.	25
Geocomposite Wall Drain	Sq. Yd.	975
Temporary Mechanically Stabilized	Sq. Ft.	9,084
Earth Retaining Wall		
Drilling and Setting Soldier Piles (In Soil)	Cu. Ft.	89
Granular Backfill for Structures	Cu. Yd.	1,368
Furnishing Soldier Piles (HP Section)	Foot	485
Temporary Sheet Piling	Sq. Ft.	-
Pipe Underdrains for Structures 4"	Foot	608
Staining Concrete Structures	Sq. Ft.	8,525

Note: Bill of Material shown for Retaining Wall quantities only. For Bridge Bill of Material, see Sheet S-6.

SECTION THRU BICYCLE RAILING POSTS AT EXPANSION JOINTS

For additional dimensions and details, see Sheet S-23 of the bridge plans.