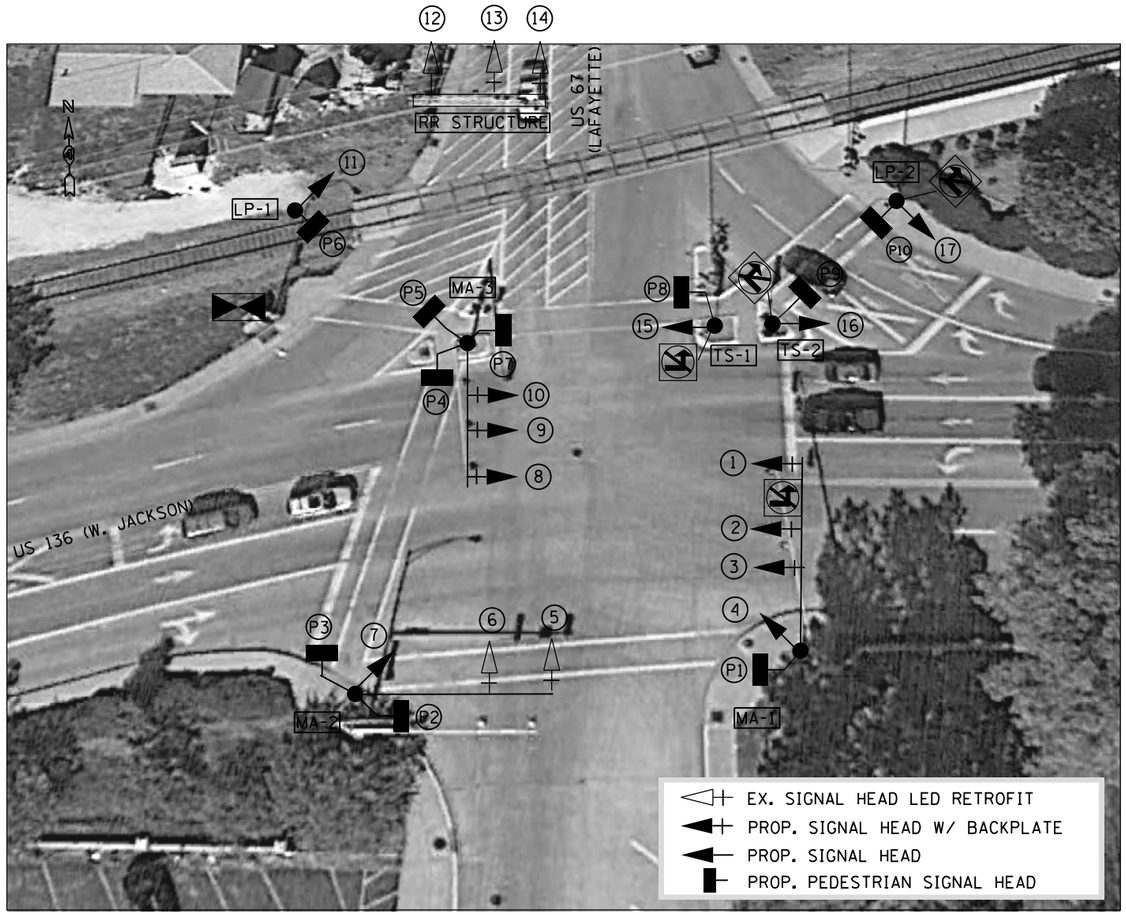

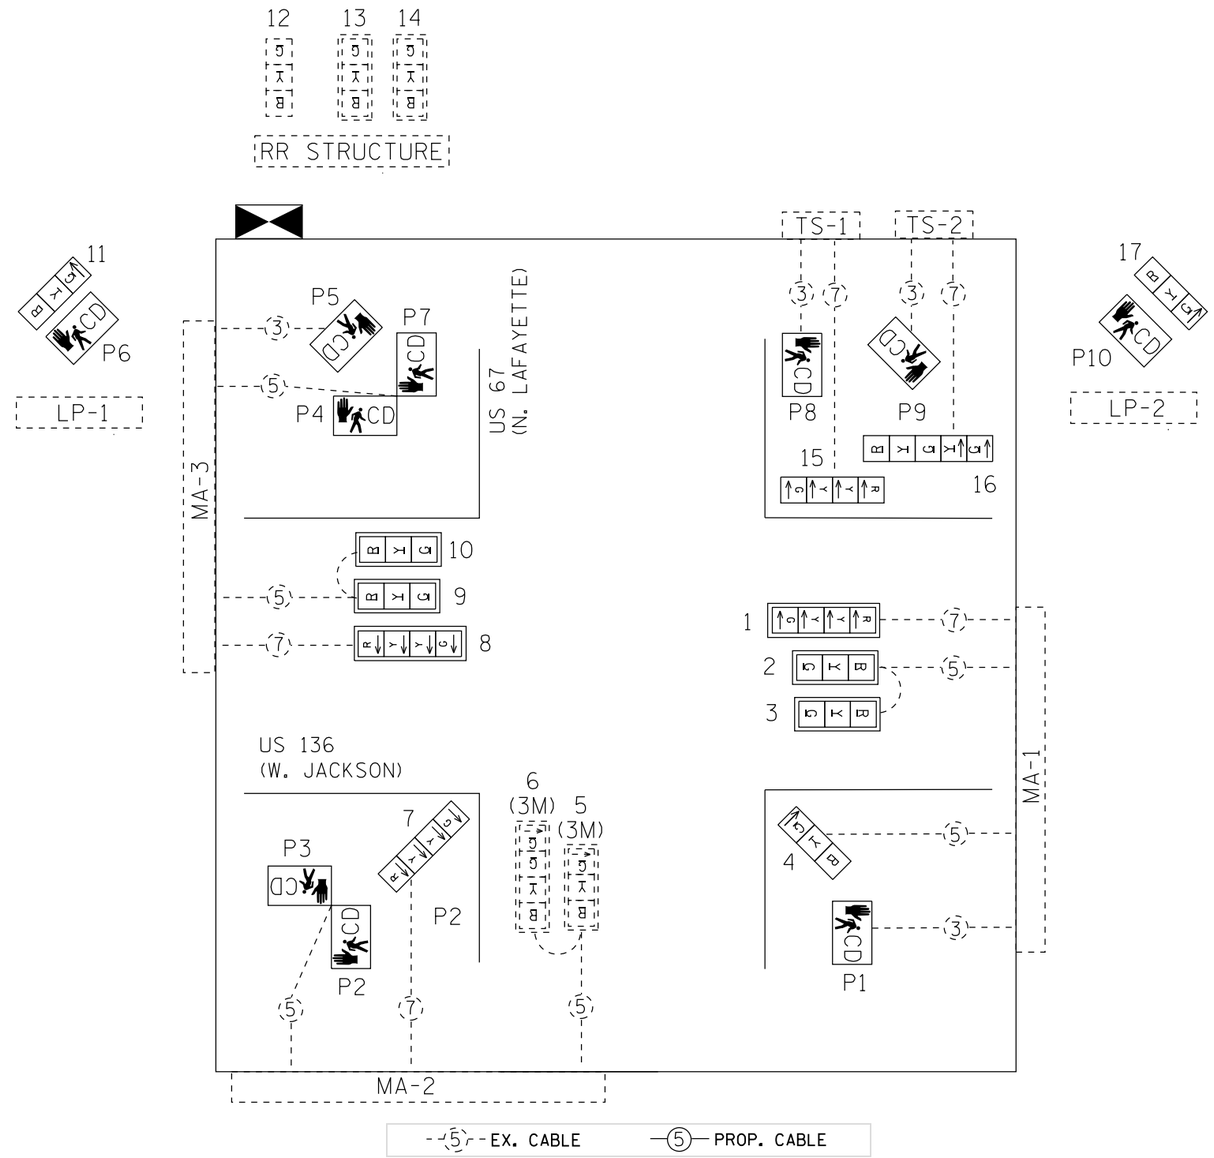

BILL OF MATERIALS - US 67 (LAFAYETTE) & US 136 (CALHOUN)		
ITEM DESCRIPTION	UNIT	TOTAL QTY.
SIGN PANEL - TYPE 1	SQ FT	10.0
SIGNAL HEAD, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED	EACH	3.0
SIGNAL HEAD, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED	EACH	4.0
SIGNAL HEAD, LED, 1-FACE, 4-SECTION, MAST ARM MOUNTED	EACH	2.0
SIGNAL HEAD, LED, 1-FACE, 4-SECTION, BRACKET MOUNTED	EACH	2.0
SIGNAL HEAD, LED, 1-FACE, 5-SECTION, BRACKET MOUNTED	EACH	1.0
PEDESTRIAN SIGNAL HEAD, LED, 1-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER	EACH	5.0
PEDESTRIAN SIGNAL HEAD, LED, 2-FACE, BRACKET MOUNTED WITH COUNTDOWN TIMER	EACH	2.0
TRAFFIC SIGNAL BACKPLATE, RETROREFLECTIVE	EACH	6.0
SIGNAL HEAD, LED, RETROFIT	EACH	5.0
MODIFY EXISTING TRAFFIC SIGNAL BACKPLATE	EACH	4.0
RAILROAD, FULL-ACTUATED CONTROLLER AND TYPE V CABINET	EACH	1.0
INDUCTIVE LOOP DETECTOR	EACH	20.0
TRAFFIC SIGNAL BATTERY BACKUP SYSTEM	EACH	1.0

TRAFFIC SIGNAL HEAD SCHEDULE - US 67 (N. LAFAYETTE) & US 136 (CALHOUN)		
QTY.	TYPE	LOCATION
4.0 EACH	SH LED 1F 3S MAM	2,3,9,10
3.0 EACH	SH LED 1F 3S BM	4,11,17
2.0 EACH	SH LED 1F 4S MAM	1,8
2.0 EACH	SH LED 1F 4S BM	7,15
1.0 EACH	SH LED 1F 5S BM	16.0
6.0 EACH	TS BACKPLATE RET-REFL	1,2,3,8,9,10
4.0 EACH	MOD EX TS BACKPLATE	5,6,13,14
5.0 EACH	SH LED RETROFIT	5,6,12,13,14 (5 AND 6 ARE 3M OPT PROG HEADS)
5.0 EACH	PED SH LED 1F BM CDT	P1, P5,P6,P9,P10
2.0 EACH	PED SH LED 2F BM CDT	(P2,P3),(P4,P7)

FILE NAME = C:\Users\aubreygs\Desktop\68B61\68B61 - Macomb FYA Project (Final 1-31-14).dgn	USER NAME = aubreygs	DESIGNED - ___	REVISED - ___
		DRAWN - ___	REVISED - ___
	PLOT SCALE = 38.0588 ' / in.	CHECKED - ___	REVISED - ___
	PLOT DATE = 1/31/2014	DATE - ___	REVISED - ___

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROPOSED TRAFFIC SIGNALS
US 67 (N. LAFAYETTE) & US 136 (CALHOUN) – MACOMB

SCALE: ___ STA. ___ TO STA. ___

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
310	D4 FLASHING YELLOW ARROWS 2013	MCDONOUGH	24	12
315		CONTRACT NO. 68B61		
		ILLINOIS FED. AID PROJECT		