


| SEEDING & EROSION CONTROL SCHEDULE | | | | | | | | | | | |
|------------------------------------|----|------------|-------|-------|------------------|------------------------------|--------------------------------|-------------------------------|-----------------|-----------------------------------|---------------------------|
| LOCATION | | | WB/EB | RT/LT | SEEDING CLASS 2A | NITROGEN FERTILIZER NUTRIENT | PHOSPHORUS FERTILIZER NUTRIENT | POTASSIUM FERTILIZER NUTRIENT | MULCH, METHOD 2 | TEMPORARY EROSION CONTROL SEEDING | GRADING & SHAPING DITCHES |
| STA. | TO | STA. | | | ACRE | POUND | POUND | POUND | ACRE | POUND | FOOT |
| 2797+21.28 | TO | 2806+18.28 | WB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2797+82.28 | TO | 2805+57.28 | WB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2839+16.22 | TO | 2848+13.22 | WB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2839+77.22 | TO | 2847+52.22 | WB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2999+10.88 | TO | 3008+07.88 | WB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2999+71.88 | TO | 3007+46.88 | WB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2970+95.03 | TO | 2977+10.03 | WB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2798+09.41 | TO | 2807+06.41 | EB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2798+70.41 | TO | 2806+45.41 | EB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2838+59.75 | TO | 2847+56.75 | EB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2839+20.75 | TO | 2846+95.75 | EB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2998+97.17 | TO | 3007+94.17 | EB | RT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2999+58.17 | TO | 3007+33.17 | EB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2964+21.00 | TO | 2970+36.00 | EB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 3025+08.77 | TO | 3031+23.77 | EB | LT | 0.3 | 22.5 | 22.5 | 22.5 | 0.3 | 25.0 | |
| 2823+86.71 | TO | 2842+71.23 | EB | RT | 0.8 | 67.5 | 67.5 | 67.5 | 0.8 | 75.0 | 1885 |
| TOTAL | | | | | 5 | 405 | 405 | 405 | 5 | 450 | 1885 |

NOTE: 1 THIS WORK IS TO DRAIN CULVERT FROM UNDER ABUTMENT TO CROSSROAD CULVERT. SEE SHEETS 25 AND 26.


| TREE REMOVAL | | | | | |
|---------------|----|------------|---------------------|---------------------------------------|--------------------------|
| LOCATION | | | TREE REMOVAL, ACRES | TREE REMOVAL (OVER 15 UNITS DIAMETER) | NOTES |
| STA. | TO | STA. | ACRE | UNIT | |
| 2804+00.00 | TO | 2806+00.00 | 0.09 | | TREES CLOSE TO ROAD |
| 2882+50.00 | TO | 2883+10.00 | 0.05 | | DEAD TREES |
| 2894+00.00 | TO | 2928+00.00 | 1.56 | | TREES |
| 2894+00.00 | TO | 2928+00.00 | 1.56 | | TREES CLOSE TO ROAD |
| 2894+00.00 | TO | 2918+00.00 | 1.10 | | TREES CLOSE TO ROAD |
| 2899+00.00 | TO | 2918+00.00 | 0.87 | | TREES CLOSE TO ROAD |
| 2927+50.00 | TO | 2930+00.00 | 0.17 | | DEAD TREES |
| 2926+00.00 | TO | 2937+00.00 | 0.51 | | TREES IN DRAINAGE |
| 2934+00.00 | TO | 2940+00.00 | 0.41 | | TREES IN DRAINAGE |
| 2941+00.00 | TO | 2941+75.00 | 0.05 | | DEAD TREES |
| 2945+50.00 | TO | 2947+00.00 | 0.05 | | DEAD TREES |
| 2945+50.00 | TO | 2947+00.00 | 0.05 | | CUT TO R.O.W. |
| 2953+00.00 | TO | 2955+00.00 | 0.09 | | TREES |
| 3004+00.00 | TO | 3007+00.00 | 0.14 | | TREES CLOSE TO ROAD |
| 2997+00.00 | TO | 3002+50.00 | 0.25 | | TREES CLOSE TO ROAD |
| 3005+00.00 | TO | 3008+00.00 | 0.14 | | TREES CLOSE TO ROAD |
| 3024+00.00 | TO | 3025+00.00 | 0.05 | | TREES CLOSE TO ROAD |
| 3024+00.00 | TO | 3025+00.00 | 0.05 | | TREES CLOSE TO ROAD |
| OFF RAMP I-70 | | | WB | 0.46 | TREES CLOSE TO ROAD |
| ON RAMP I-70 | | | WB | 0.34 | TREES CLOSE TO ROAD |
| OFF RAMP I-70 | | | EB | 0.83 | TREES CLOSE TO ROAD |
| ON RAMP I-70 | | | EB | 0.48 | TREES CLOSE TO ROAD |
| 2882+26.00 | | EB LT | | 18 | GROUP OF FOUR DEAD TREES |
| 2882+26.00 | | EB LT | | 24 | |
| 2882+26.00 | | EB LT | | 22 | |
| 2882+26.00 | | EB LT | | 28 | |
| 2888+79.00 | | EB LT | | 24 | DEAD TREE |
| 2920+12.00 | | EB LT | | 24 | DEAD TREE |
| 2920+75.00 | | EB LT | | 24 | DEAD TREE |
| 2935+29.00 | | EB LT | | 24 | DEAD TREE |
| 2935+80.00 | | EB LT | | 20 | DEAD TREE |
| 2937+78.00 | | EB LT | | 18 | DEAD TREE |
| 2939+18.00 | | EB LT | | 30 | DEAD TREE |
| 2940+46.00 | | EB LT | | 24 | DEAD TREE |
| 2943+65.00 | | EB LT | | 32 | DEAD TREE |
| 2944+20.00 | | EB LT | | 20 | DEAD TREE |
| 2948+18.00 | | EB LT | | 36 | DEAD TREE |
| 2948+36.00 | | EB LT | | 30 | DEAD TREE |
| 2948+93.00 | | EB LT | | 28 | DEAD TREE |
| 2952+81.00 | | EB LT | | 26 | DEAD TREE |
| TOTAL | | | 9.5 | 452 | |

NOTES:

- 1 THE INTENT OF THE TREE REMOVAL IS TO REMOVE DEAD TREES AND TREES (INCLUDING OVERHANGING BRANCHES) THAT ARE IN THE CLEAR ZONE, OBSTRUCTING DRAINAGE OR BLOCKING SIGNS.
- 2 TREE DIAMETERS, AREAS, AND LOCATIONS ARE APPROXIMATE. EXACT LOCATIONS TO BE DETERMINED BY THE ENGINEER BASED ON ACTUAL SITE CONDITIONS.

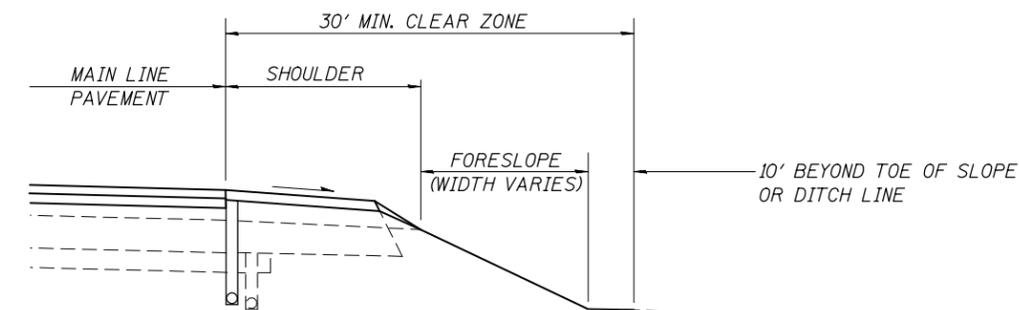

APPROXIMATE LIMITS OF INTENT OF TREE REMOVAL DOWN SLOPES

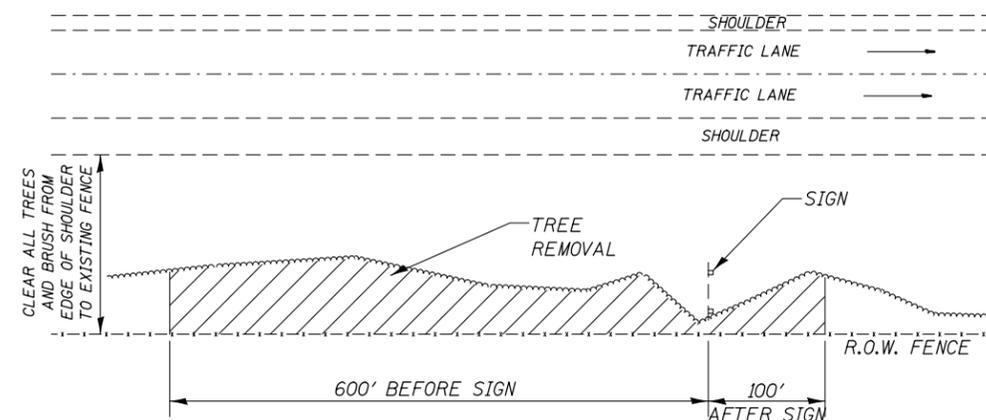

APPROXIMATE LIMITS OF INTENT OF TREE REMOVAL AROUND SIGNS

| | | | | | | | | | | | | |
|---|------------------------------|------------|-----------|---|-------------------------------|-----------|-----------|---|---------|--------|--------------|-----------|
| FILE NAME = | USER NAME = wedmore_jb | DESIGNED - | REVISED - | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | SCHEDULE OF QUANTITIES | | | F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| et:\pw_work\p\dot\wedmore_jb\d0149884\0876021-sh-t-schedule.dgn | PLOT SCALE = 100.0000' / 1". | DRAWN - | REVISED - | | | | | 70 | 3-5RS-3 | BOND | 59 | 14 |
| PLOT DATE = 3/10/2014 | DATE - | CHECKED - | REVISED - | | CONTRACT NO. 76D21 | | | FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT | | | | |
| | | | | | SCALE: | SHEET NO. | OF SHEETS | STA. | TO STA. | | | |