


STAGE 2 SHOULDER SCHEDULE

LOCATION STATION TO STATION			COMMENTS	PAVED SHOULDER WIDTH	SHOULDER DEPTH	PCC SHOULDER 12"	HMA SHOULDERS	AGG. SHLDRS. TY. A 8"	SHLDR RUMBLE STRIP	BIT MATLS (PRIME COAT)	
				FT	INCH	SQ YD	TON	SQ YD	FOOT	POUNDS	
STAGE 2											
834+91.42	TO	838+11.42	NB I-57 (I5764B) DL & OS (BUTT JOINT)	12	8*	X	103	X	X	192	
838+11.42	TO	876+50.00	NB I-57 (I5764B) DL & OS	12	8	X	2357	X	3839	2303	
876+50.00	TO	879+70.00	NB I-57 (I5764B) DL & OS, PATCH & R/S (transition)	12	9.875	X	244	X	320	192	
879+70.00	TO	880+94.86	NB I-57 (I5764B) DL & OS, PATCH & R/S	12	8	X	77	X	125	75	
882+15.39	TO	885+00.00	NB I-57 (I5764A) DL & OS, PATCH & R/S	12	8	X	175	X	285	171	
2356+80.00	TO	2360+00.00	EB I-64 (I64) DL & OS (BUTT JOINT)	12	8	X	196	X	320	192	
2360+00.00	TO	2363+46.36	EB I-64 (I64) DL & OS	12	8	X	213	X	346	208	
2364+03.81	TO	2398+72.60	EB I-64 TO SB I-57 (I5764C) DL & OS	12	8	X	2130	X	3469	2081	
836+24.17	TO	843+66.07	EB I-64 TO SB I-57 (TAPER C1) DL & OS	12	8	X	455	X	742	445	
833+05.03	TO	836+25.03	SB I-57 (I5764A) DL & OS (BUTT JOINT)	12	8	X	103	X	X	192	
TOTAL STAGE 2							0	6052	0	9445	6051

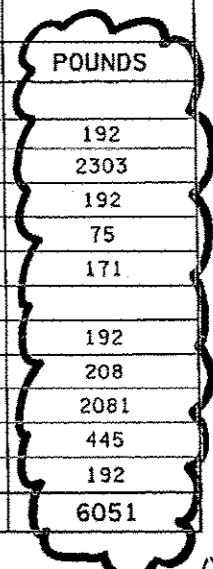

△ REV. 4-10-14

FILE NAME *	USER NAME * r01levr	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGE 2 SHOULDER SCHEDULE				P.A.I. RTE. **	SECTION *	COUNTY JEFFERSON	TOTAL SHEETS 235	SHEET NO. 31
c:\p\work\w\idot\rollerv\d8270568\7827	*shb-tp.ech.tss.dgn	DRAWN -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.				ILLINOIS FED. AID PROJECT				
#MODELNAME*	PLOT SCALE * 3/16.0000 "/> <td>CHECKED -</td> <td>REVISED -</td> <td colspan="9" style="text-align: right;">CONTRACT NO. T8276</td>	CHECKED -	REVISED -		CONTRACT NO. T8276								
	PLOT DATE * 4/4/2014	DATE -	REVISED -		(41-3-DRS-1)(41-8RS-2) 0057/64								