



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A. -- RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR. D2 HT PVMNT MRK RPR 26-01	ILLINOIS	VARIOUS	3	1
CONTRACT NO. 46659				

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR STATE STANDARDS, SEE SHEET NO. 2
FOR GENERAL NOTES, SEE SHEET NO. 2

PROPOSED
HIGHWAY PLANS

VARIOUS ROUTES
SECTION D2 HT PVMNT MRK RPR 26-01
HIGH TYPE PAVEMENT MARKING
VARIOUS COUNTIES

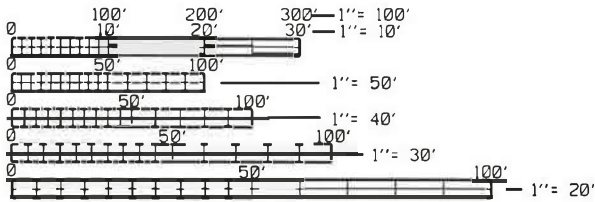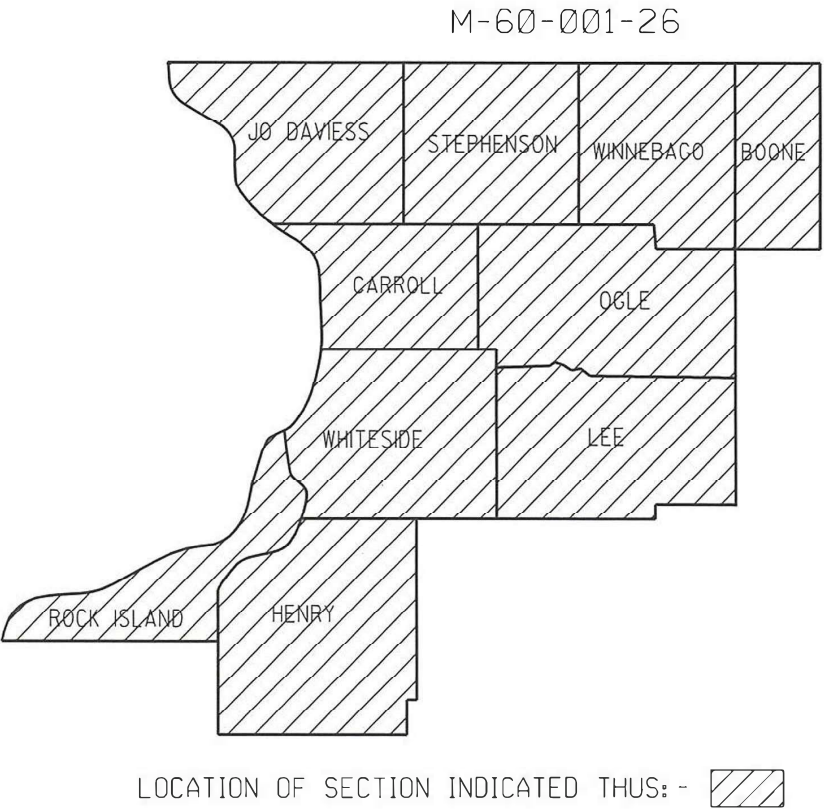

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: TROY EBENEZER (815) 284-5491
PROJECT MANAGER: KRISTIE NYDEREK (815) 284-5469

CONTRACT NO. 46659

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Jan 15 2025
Mark Strong
REGIONAL ENGINEER

March 21 2025
Scott Etk
ENGINEER OF DESIGN AND ENVIRONMENT

March 21 2025
Garrett
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

1	COVER SHEET
2	INDEX OF SHEETS & STATE STANDARDS
3-4	SUMMARY OF QUANTITIES
5	SCHEDULE OF QUANTITIES
6-9	TYPICAL PAVEMENT MARKINGS (41.1)

STATE STANDARDS

701006-05	OFF-ROAD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701101-05	OFF-ROAD OPERATIONS, MULTI-LANE, 15' TO 24" FROM PAVEMENT EDGE
701311-03	LANE CLOSURE, 2L-2W, MOVING OPERATION, DAY ONLY
701426-09	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS ≥ 45 MPH
701427-05	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS ≤ 45 MPH
701501-06	URBAN LANE CLOSURE, 2L2W, UNDIVIDED
701601-09	URBAN LANE CLOSURE, MULTI-LANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
701701-10	URBAN LANE CLOSURE, MULTI-LANE INTERSECTION
701901-10	TRAFFIC CONTROL DEVICES
780001-05	TYPICAL PAVEMENT MARKINGS
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY

GENERAL NOTES

ALL PREFORMED PLASTIC PAVEMENT MARKING LINES SHALL BE CONTRAST PREFORMED PLASTIC AND SHALL ONLY BE APPLIED IN A RECESSED GROOVE.

MODEL: 140001-05
FILE NAME: 140001-05

	USER NAME = SUSERS	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS & STATE STANDARDS	SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -				VAR.	D2 HT PVMNT MRK RPR 26-0	VARIOUS		2
	PLOT SCALE = SCALES	CHECKED -	REVISED -				CONTRACT NO. 46659				
	PLOT DATE = SDATES	DATE -	REVISED -				ILLINOIS FED. AID PROJECT				

SUMMARY OF QUANTITIES

PAYCODE	ITEM DESCRIPTION	UNITS		CONSTR. CODE
			TOTAL QUANTITY	PAVEMENT MARKING 100% STATE
78004635	PREFORM PLASTIC PVT MKG TYPE D - STD - LINE 7"	FOOT	100,000	100,000
78004645	PREFORM PLASTIC PVT MKG TYPE D - STD - LINE 9"	FOOT	100,000	100,000
78011040	GROOVING FOR RECESSED PVT MK 8"	FOOT	100,000	100,000
78011050	GROOVING FOR RECESSED PVT MK 10"	FOOT	100,000	100,000
78300201	PAVT MRKG REM GRIND	SQ FT	1,200,000	1,200,000
Z0008758	AERIAL SPEED CHK MK	FOOT	250	250
78009000	MOD URETH PM LTR-SYM	SQ FT	25,000	25,000
78009004	MOD URETH PM LINE 4	FOOT	200,000	200,000
78009006	MOD URETH PM LINE 6	FOOT	100,000	100,000
78009008	MOD URETH PM LINE 8	FOOT	175,000	175,000
78009012	MOD URETH PM LINE 12	FOOT	50,000	50,000
78009024	MOD URETH PM LINE 24	FOOT	15,000	15,000

0021

MODEL: S40011485
FILE NAME: ST555

	USER NAME = SUSERS	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES		F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -		SCALE: _____	SHEET _____ OF _____ SHEETS	STA. _____ TO STA. _____	VAR. D2 HT PVMNT MRK RPR 26-0	VARIOUS		3
	PLOT SCALE = SCALES	CHECKED -	REVISED -		CONTRACT NO. 46659						
	PLOT DATE = SDATES	DATE -	REVISED -		ILLINOIS FED. AID PROJECT						