

**FLARED END SECTION REMOVAL**  
39+02.9, 68.2 LT  
39+04.3, 56.4 RT  
39+14.6, 67.5 RT


**REMOVING CATCH BASINS**  
39+02.8, 4.1 LT  
39+03.3, 49.6 LT

**REMOVING INLETS**  
37+39.9, 5.5 RT

**REMOVING MANHOLES**  
39+03.3, 1.3 RT

**STORM SEWER REMOVAL - 12"**  
STA. 37+39.9 TO 39+03.3 - 160'  
STA. 39+02.8 TO 39+03.3 - 1'  
STA. 39+02.9 TO 39+03.3 - 17'  
STA. 39+03.3 TO 39+04.3 - 53'

**SEE DU-26-28 FOR 179TH ST. EXISTING DRAINAGE**

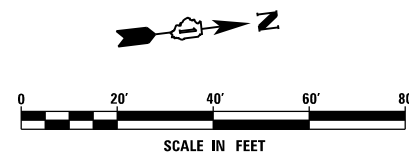

**NOTE:**

- SEE DRAWING DN-01 FOR DRAINAGE LEGEND AND NOTES.
- SEE DRAWINGS DS-01 THROUGH DS-11 FOR STRUCTURE AND PIPE INFORMATION

FILE NAME = D160F05-KEA-SHT-DRAINEX03.dgn	USER NAME = Frank_Stallone	DESIGNED - MGS	REVISED -
SHT.PLAN	PLOT SCALE = 40.0001' / in.	DRAWN - REW	REVISED -
	PLOT DATE = 3/14/2013	CHECKED - JRS	REVISED -
		DATE - 03/13/13	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**EXISTING DRAINAGE PLAN - US 45 (LAGRANGE ROAD)**

SCALE: 1"=20'    SHEET 3 OF 35 SHEETS    STA. 33+50.00 TO STA. 39+50.00

F.A.P. RTE. 330	SECTION 103R-3	COUNTY COOK	TOTAL SHEETS 932	SHEET NO. 259
<b>DU-03</b>			<b>CONTRACT NO. 60F05</b>	
ILLINOIS FED. AID PROJECT				