




**EROSION CONTROL GENERAL NOTES:**

1. THE CONSTRUCTION LIMITS WILL BE STAKED/APPROVED BY THE ENGINEER PRIOR TO COMMENCING CONSTRUCTION. THE CONSTRUCTION LIMITS MAY BE ADJUSTED BY THE ENGINEER TO PRESERVE TREES AND NO ADDITIONAL COMPENSATION WILL BE PAID TO THE CONTRACTOR FOR CHANGES IN THE CONSTRUCTION LIMITS.
2. EROSION CONTROL ITEMS ARE CONSIDERED TO BE HIGH PRIORITY ITEMS ON THIS CONTRACT. THE ENGINEER WILL IMPLEMENT ALL PROVISIONS OF THE SPECIFICATION NECESSARY TO ASSURE THAT EROSION CONTROL ITEMS ARE CONSTRUCTED AND MAINTAINED IN A TIMELY WAY. ALL EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITIES.
3. THE EROSION CONTROL MEASURES SHOWN ARE BUT A GRAPHICAL REPRESENTATION OF SUGGESTED MEASURES. DEVIATIONS FROM THIS PLAN ARE TO BE EXPECTED PENDING A JOBSITE INSPECTION BETWEEN THE CONTRACTOR AND THE DEPARTMENT.
4. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN SEDIMENT CONTROL MEASURES PRIOR TO STRIPPING EXISTING VEGETATION.
5. TEMPORARY EROSION CONTROL SEEDING SHALL BE PROVIDED PER SUB-STAGE AS SOON AS ROUGH GRADING IS COMPLETED IN A SECTION, BUT IN NO CASE MORE THAN 7 DAYS AFTER THE CONSTRUCTION ACTIVITIES IN THAT PORTION OF THE SITE HAVE TEMPORARILY OR PERMANENTLY CEASED WHERE CONSTRUCTION WILL NOT OCCUR FOR A PERIOD OF 14 OR MORE CALENDAR DAYS.
6. ANY AREA WHERE THERE IS NO PROPOSED GRADING THE EXISTING GROUND COVER SHALL REMAIN.
7. THE CONTRACTOR SHALL PROVIDE TO THE RESIDENT ENGINEER A PLAN TO HAVE A STABILIZED CONNECTION BETWEEN THE UPSTREAM AND DOWNSTREAM ENDS OF STORM WATER CONVEYANCE UNDER CONSTRUCTION WHEN RAIN IS FORECASTED DURING STORM SEWER CONSTRUCTION, SO THAT FLOW WILL NOT CAUSE EROSION.
8. TEMPORARY STOCKPILE LOCATIONS SHALL BE APPROVED BY THE ENGINEER AND WILL REQUIRE SILT FENCE AND TEMPORARY SEEDING.

**LEGEND:**

-  INLET FILTER
-  TEMPORARY DITCH CHECK
-  PERIMETER EROSION BARRIER
-  INLET AND PIPE PROTECTION
-  TEMPORARY EROSION CONTROL SEEDING AND MULCH, METHOD 2
-  ROCK OUTFALL PROTECTION/RIPRAP (SEE DRAINAGE PLANS)

NOTE: STRAW BALES AND SILT FENCE SHOULD NOT BE USED AS INLET AND PIPE PROTECTION. INLET AND PIPE PROTECTION SHOULD BE COMPRISED OF DITCH CHECKS, TEMPORARY SEEDING, AND TEMPORARY EROSION CONTROL BLANKET.

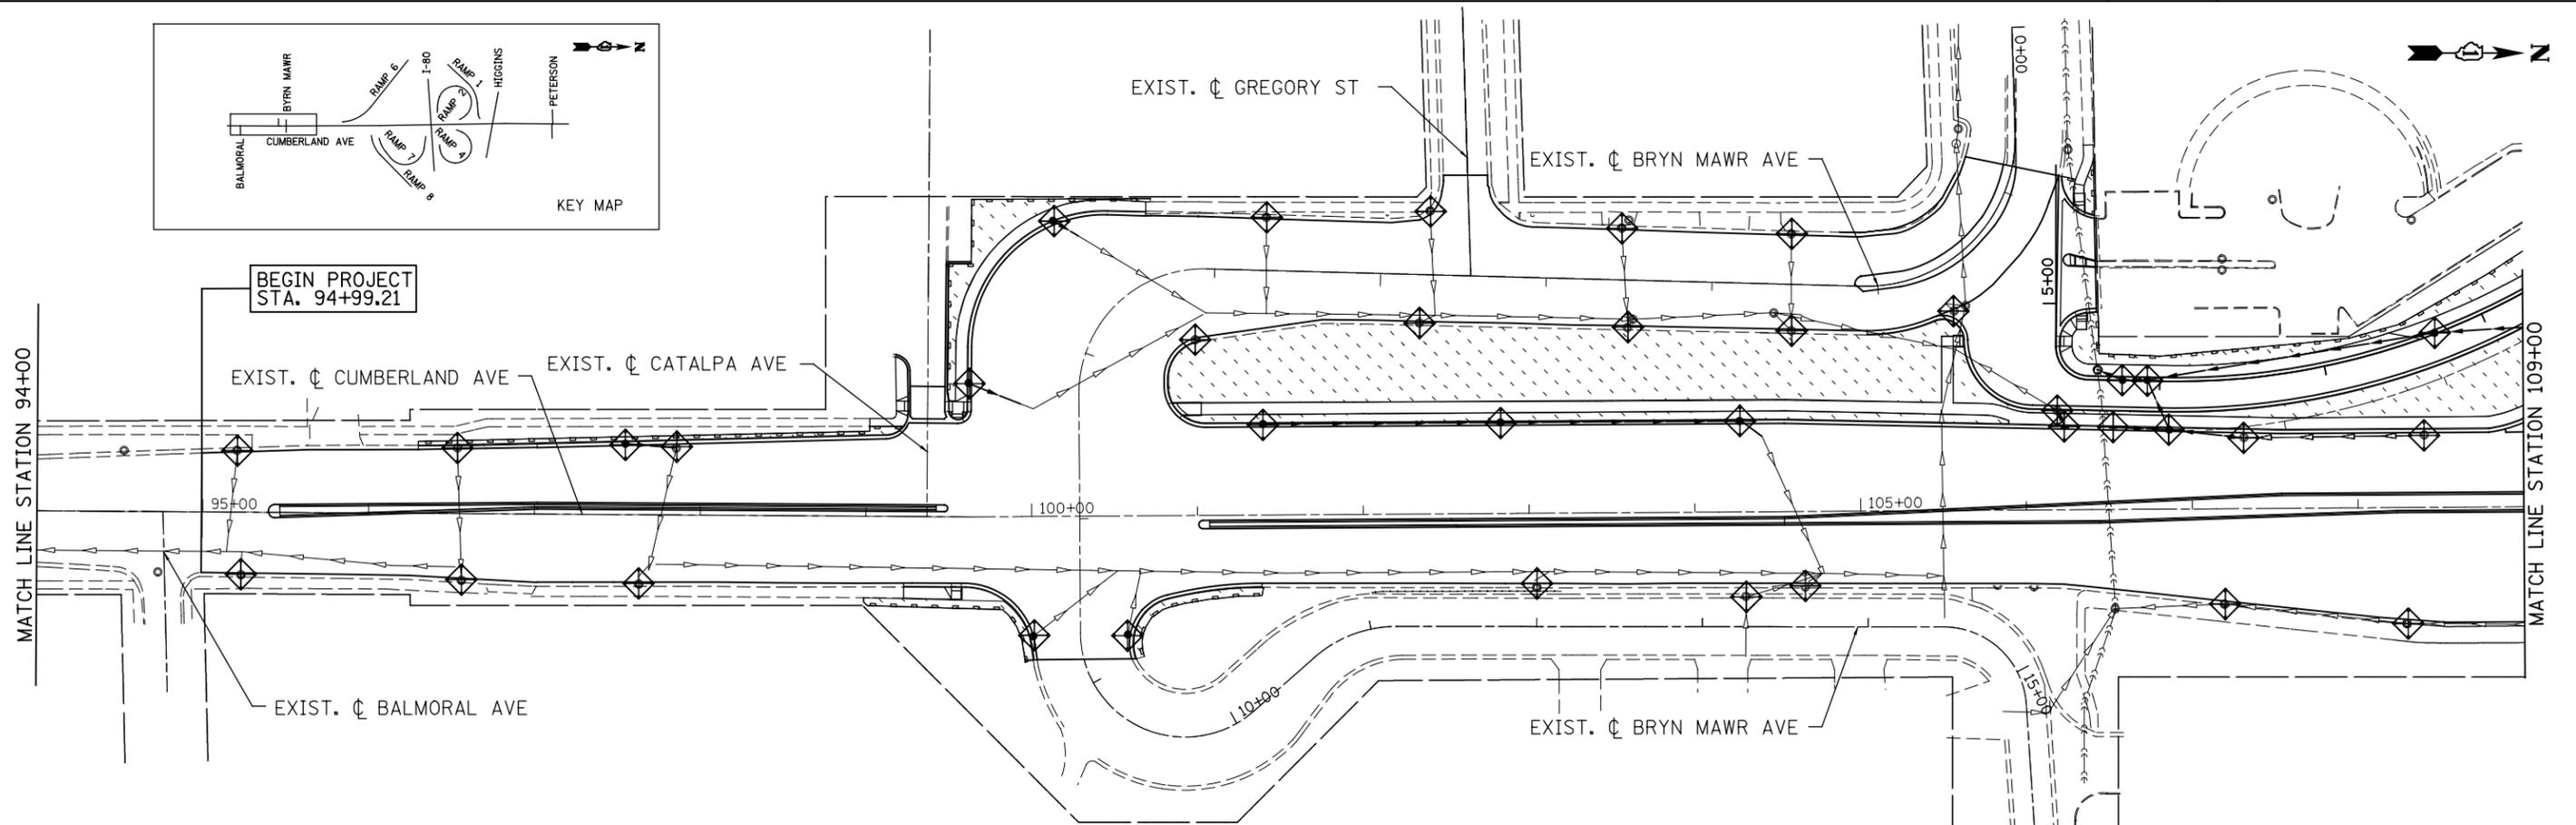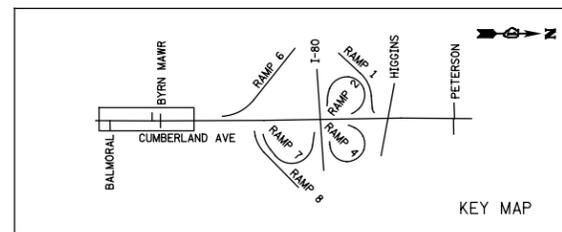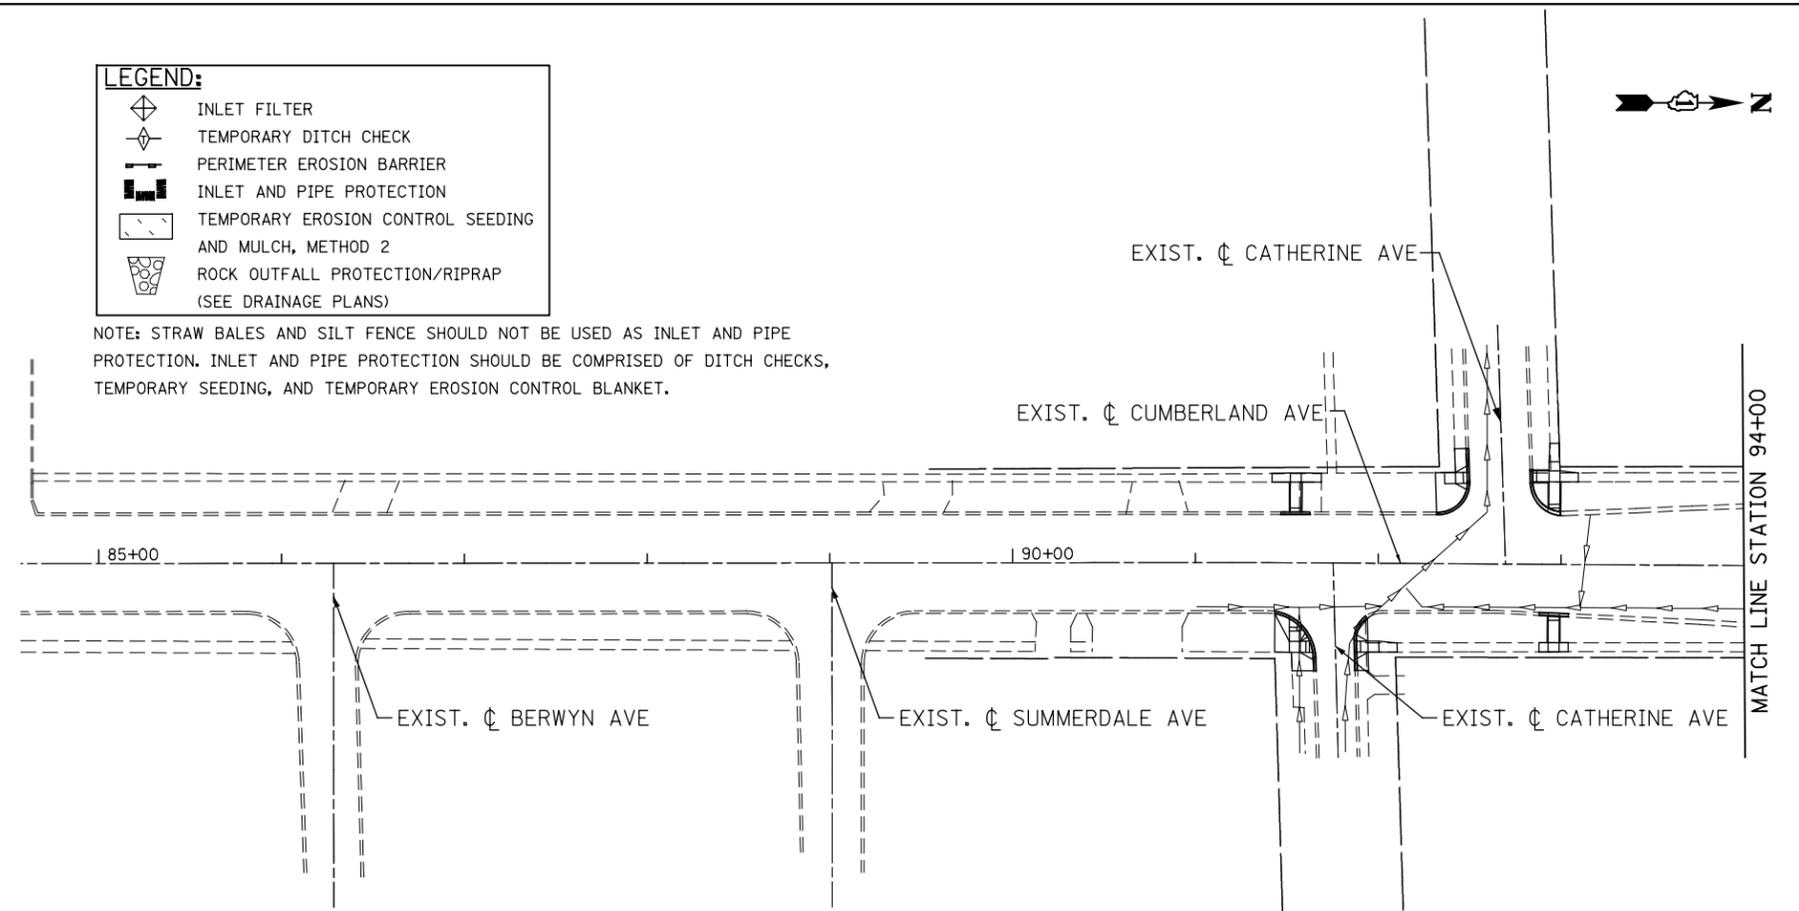

 PATRICK ENGINEERING INC. 4970 VARSITY DRIVE LISLE, IL 60532 patrickengineering.com	USER NAME = tkoeppen(Rdwy_Lisle) PLOT CONFIG = PDF(Grey_Small).plt PLOT SCALE = 1:1000 PLOT DATE = 2/18/2013 5:02:33 PM	DESIGNED - DD DRAWN - DD CHECKED - AJ DATE - 2/18/2013	REVISED - REVISED - REVISED - REVISED -	<b>STATE OF ILLINOIS                  DEPARTMENT OF TRANSPORTATION</b>	<b>SOIL EROSION AND SEDIMENTATION CONTROL PLAN                  CUMBERLAND AVENUE</b>			F.A.U. RTE. 2746 SECTION 1616B COUNTY COOK ILLINOIS FED. AID PROJECT	TOTAL SHEETS 404 SHEET NO. 103 60J14
	SCALE: 1"=50'    SHEET ERO-01 OF 6    STA. 94+99.21 TO STA. 109+00				FED. ROAD DIST. NO.    ILLINOIS FED. AID PROJECT				

G:\DOT\21050\_006\_CumberlandAve\Drawings\CADD\_Sheets\160J14-ert-eros-01.dgn