


**TYPICAL WALL SECTION**

Showing Cedar Split Rail Fence

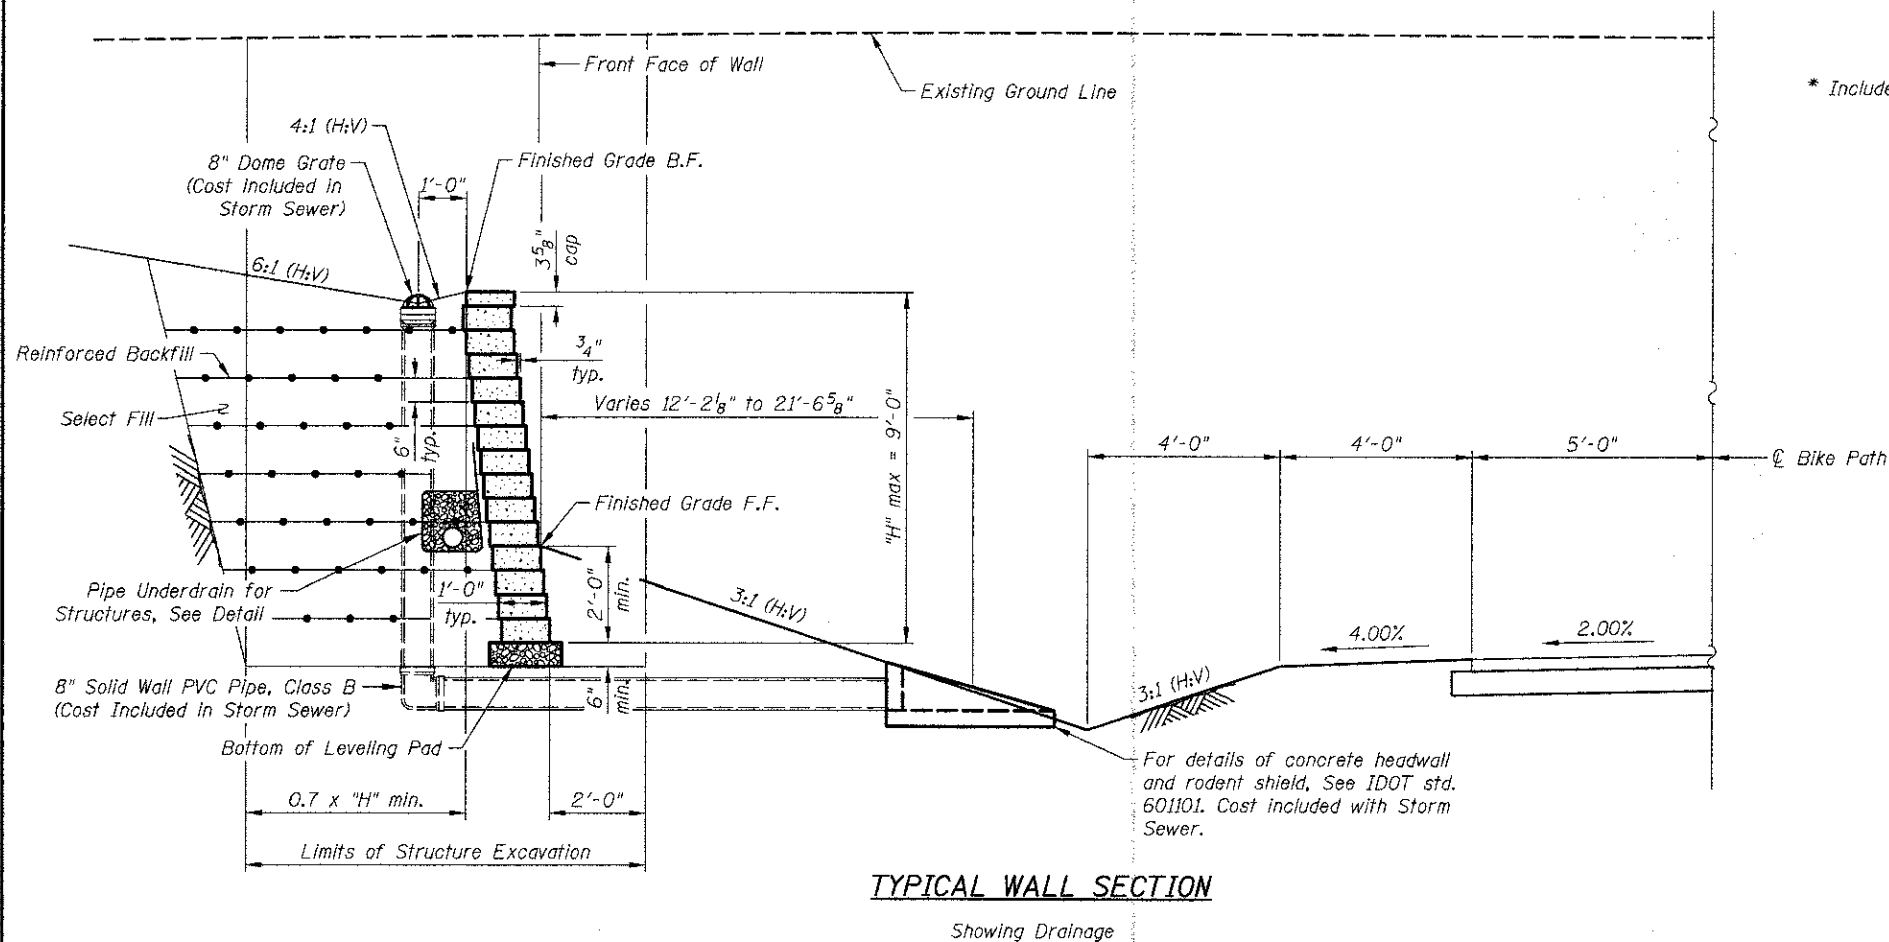

**TYPICAL WALL SECTION**

Showing Drainage

**GENERAL NOTES:**


1. Design and installation of Segmental Concrete Block Wall (including need for Soil Reinforcement) to be in accordance with Wall System Manufacturer Design Requirements and Specifications.
2. The blocks shall be Versa-Lok standard units, color Cedar Creek Brown. Units shall be installed according to manufacturer's instructions.

**TOTAL BILL OF MATERIAL**

ITEM	UNIT	TOTAL
Structure Excavation	Cu. Yd.	945
Segmental Concrete Block Wall	Sq. Ft.	2,003
Pipe Underdrains for Structures, 4"	Foot	245


**INDEX OF SHEETS**

WB1	General Plan and Elevation
WB2	General Data
WB3	Soil Boring Log

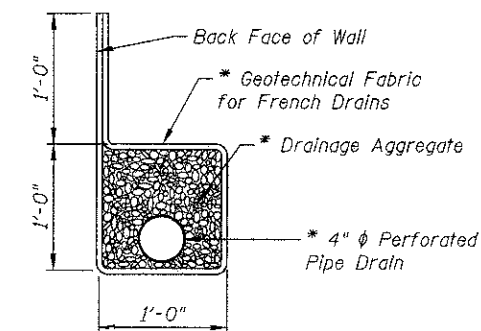

**PIPE UNDERDRAIN DETAIL**

\* Included in the cost of Pipe Underdrains for Structures, 4"

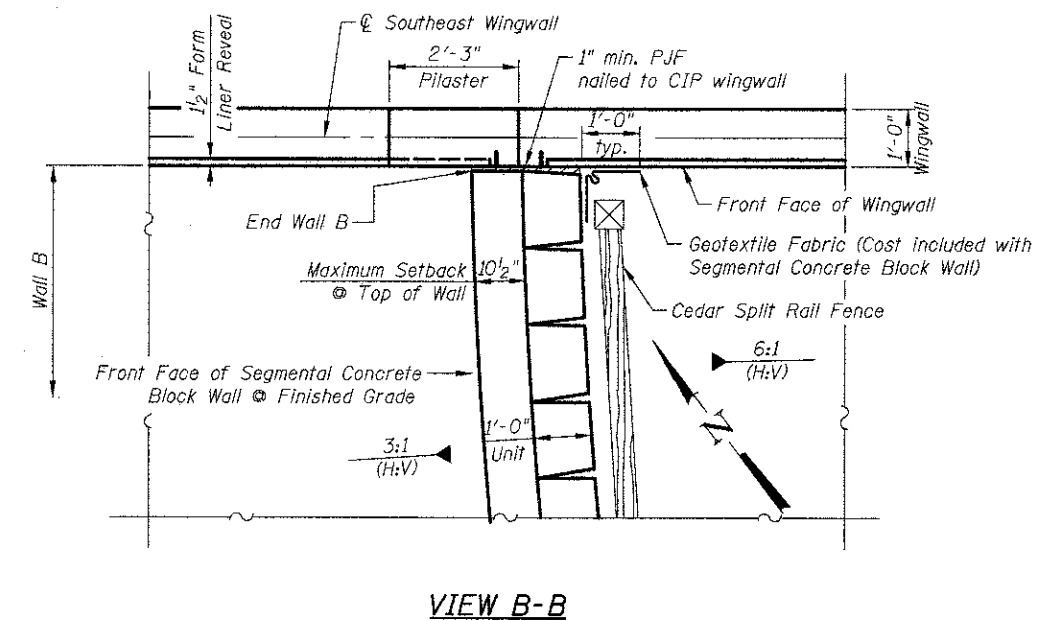

**VIEW B-B**

12/12/2012 14:25:57 PM J:\2617-CAD-Files\Plans\Wall B\02\_Wall B\_General Data.dgn



450 E Devon Ave, Suite 300  
Itasca, Illinois 60143  
Tel: 630.773.3900 Fax: 630.773.3975  
www.civiltechinc.com

DRAWN - K. BOCHNOWSKI  
DESIGNED - M. LANGE  
CHECKED - G. HATLESTAD  
DATE - DECEMBER 17, 2012

REVISED -  
REVISED -  
REVISED -  
REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**GENERAL DATA  
WALL B; BIKE PATH**

SHEET NO. WB2 OF WB3 SHEETS

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0174	09-P0075-15-BT	LAKE	74	37
CONTRACT NO. 63778				
ILLINOIS FED. AID PROJECT				