
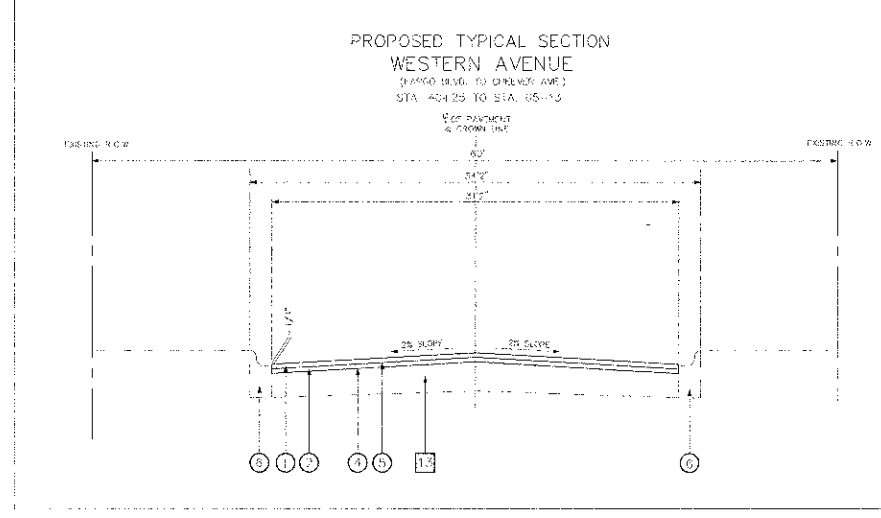




EXISTING TYPICAL SECTION LEGEND

- 1 PCC SIDEWALK
- 2 GRASS PARKWAY VARIABLE WIDTH
- 3 COMBINATION CONCRETE CURB & GUTTER, BS.12
- 4 HMA SURFACE COURSE, SEE TYPICAL FOR THICKNESS
- 5 REFLECTIVE CRACK CONTROL TREATMENT SYSTEM "A"
- 6 HMA BINDER COURSE - SEE TYPICAL FOR THICKNESS
- 7 BITUMINOUS PRIME COAT & AGGREGATE PRIME COAT
- 8 7" TO 8" CEMENT AGGREGATE BASE COURSE
- 9 PCC OR BITUMINOUS DRIVEWAY PAVEMENT
- 10 AGGREGATE BASE
- 11 CULVERT PIPE UNDER DRIVEWAY
- 12 10" - 12" HMA BASE
- 13 7" RAB BASE

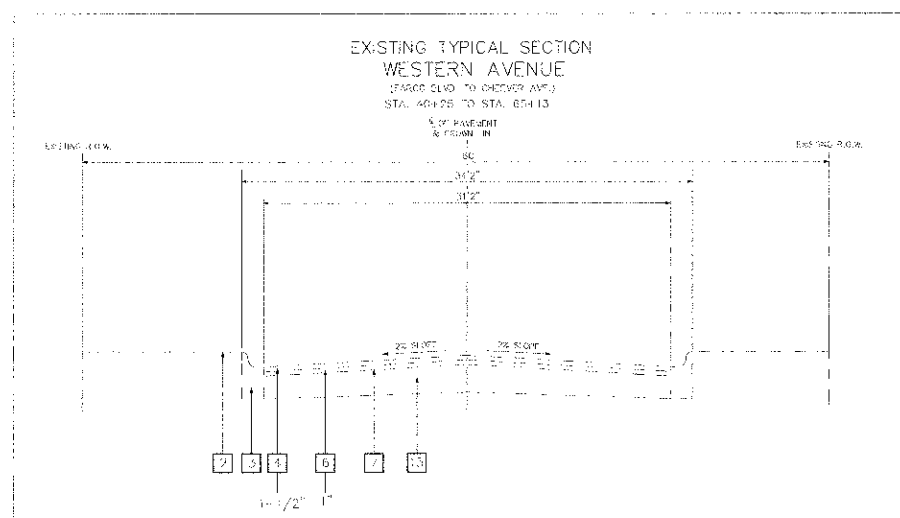

PROPOSED TYPICAL SECTION LEGEND

- 1 1 1/2" HMA SURFACE COURSE, 11X 10", NSC (IL-0.6cm)
- 2 2.25" HMA BINDER COURSE, 11-19.0, NSC
- 3 PCC DRIVEWAY PAVEMENT, 7 INCH
- 4 BITUMINOUS AND AGGREGATE PRIME COAT
- 5 HMA SURFACE REMOVAL, 1 1/2"
- 6 CURB REMOVAL & REPLACEMENT (M/MOR)

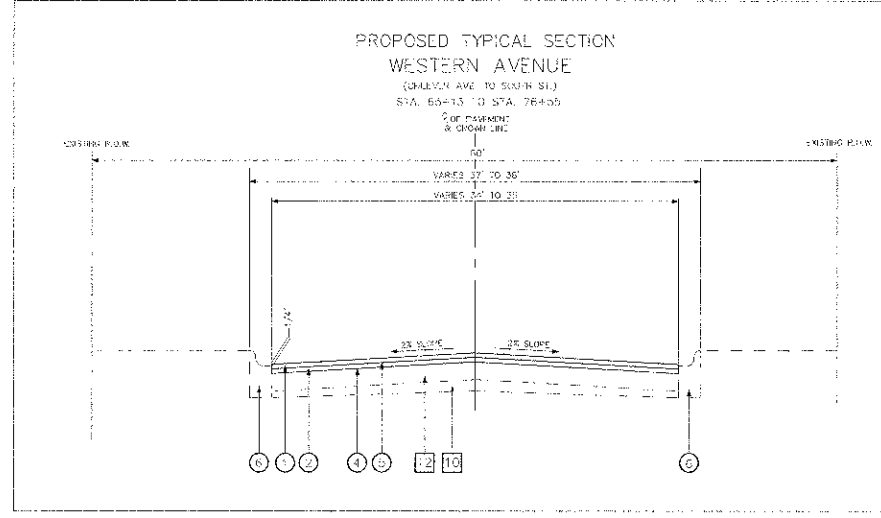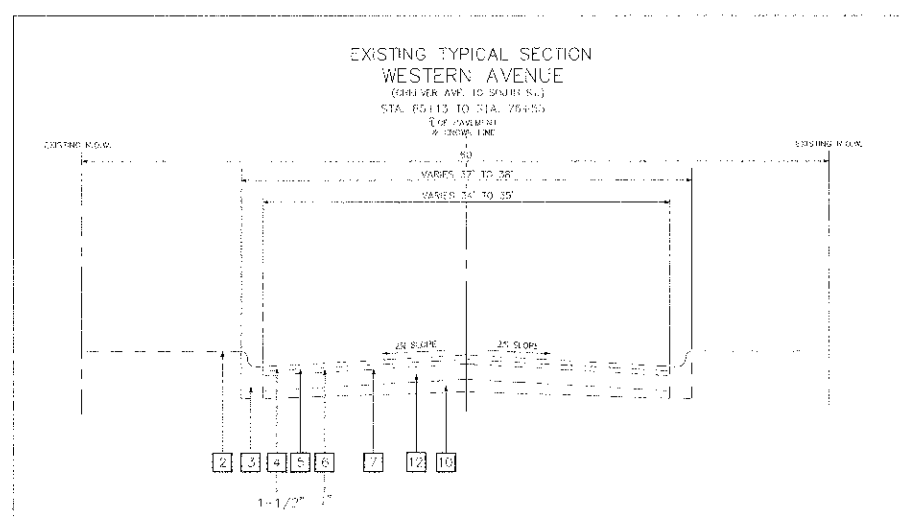

CITY OF GENEVA
KANE COUNTY, ILLINOIS

DESIGNED — PB
DRAWN — HL PM
CHECKED — PB
DATE — DEC. 2012

REVISED —
REVISED —
REVISED —
REVISED —

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
WESTERN AVE RESURFACING

TYPICAL SECTIONS
SCALE: VTS
JOB NO. C-91-162-13
STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2411	12-00114-00-RS	KANE	11	5
FED. ROAD DIST. NO. C-91-162-13		CONTRACT NO. 63814		
ILLINOIS		FED. AID PROJECT		M-4093(147)