NORTH EDGE OF CURB

Location	Station	Offset	Theoretical Grade Elevations
W. End of E. Appr. Slab	280+69.64	25.60	576.04
A3	280+79.59	25.55	576.02
A4	280+89.54	25.52	575.98
E. End of E. Appr. Slab	280+99.49	25.52	575.95

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End of E. Appr. Slab	280+69.56	32.17	576.17
A3	280+79.50	32.17	576.15
A4	280+89.43	32.17	576.12
E. End of E. Appr. Slab	280+99.37	32.17	576.08

℄ ROADWAY & PROFILE GRADE LINE (E.B.)

Location	Station	Offset	Theoretical Grade Elevations
W. End of E. Appr. Slab	280+69.42	44.17	576.41
A3	280+79.33	44.17	576.39
A4	280+89.24	44.17	576.36
E. End of E. Appr. Slab	280+99.16	44.17	576.32

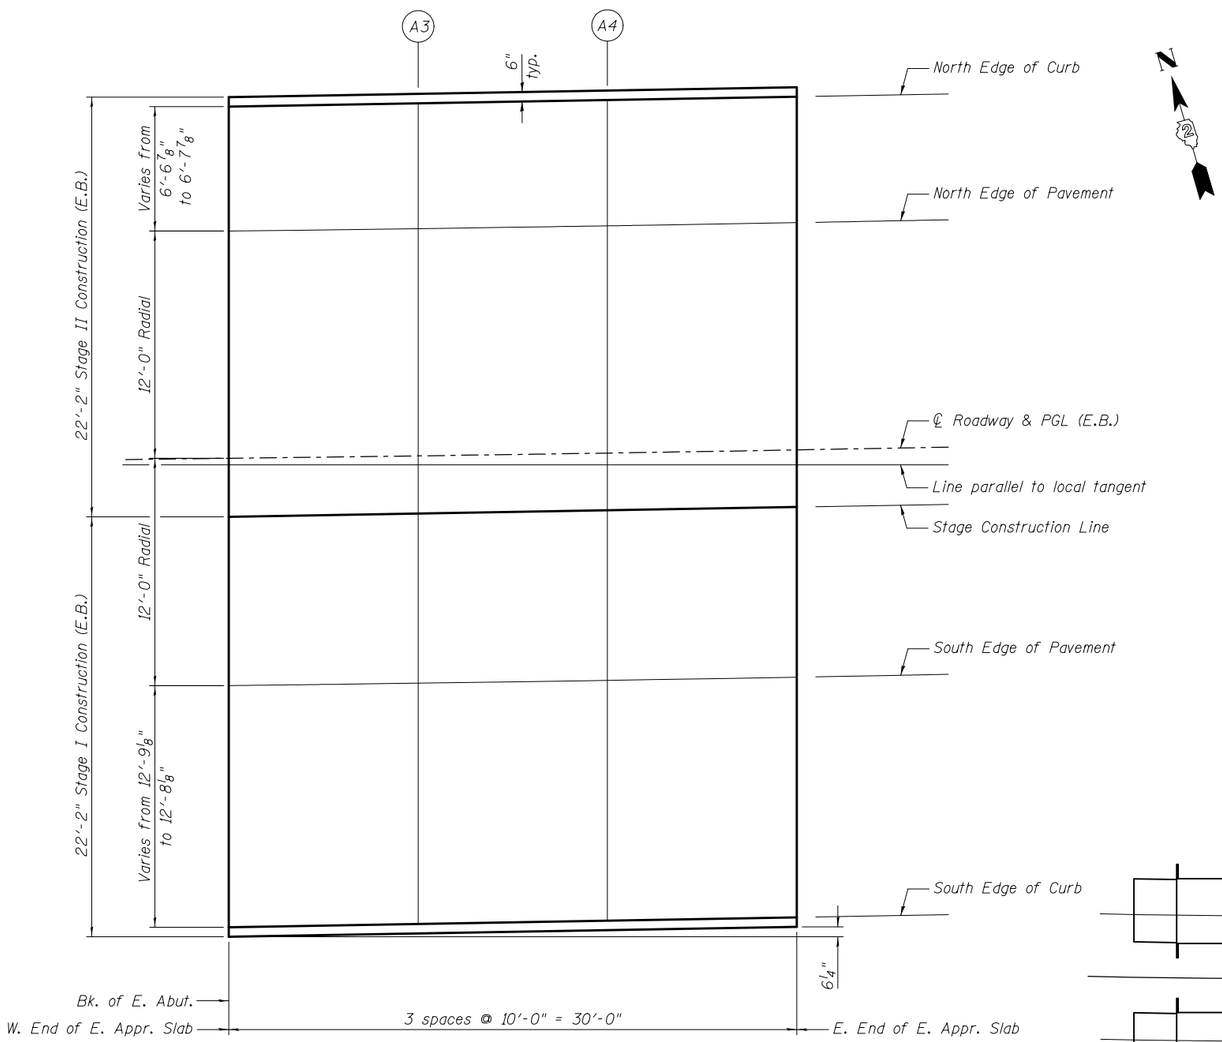

PLAN

* Offsets are measured from ℄ F.A.I. Rte. 74/280.

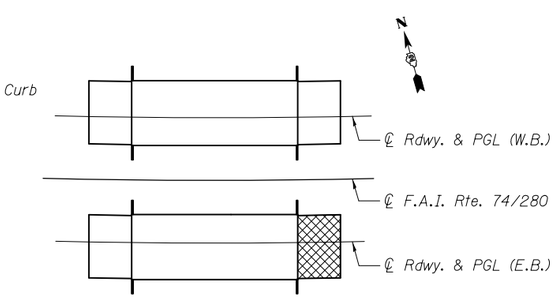

KEY PLAN

STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of E. Appr. Slab	280+69.38	47.26	576.47
A3	280+79.29	47.21	576.45
A4	280+89.20	47.19	576.42
E. End of E. Appr. Slab	280+99.10	47.18	576.38

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End of E. Appr. Slab	280+69.28	56.17	576.65
A3	280+79.17	56.17	576.63
A4	280+89.06	56.17	576.60
E. End of E. Appr. Slab	280+98.95	56.17	576.56

SOUTH EDGE OF CURB

Location	Station	Offset	Theoretical Grade Elevations
W. End of E. Appr. Slab	280+69.13	68.93	576.91
A3	280+79.00	68.88	576.88
A4	280+88.86	68.85	576.85
E. End of E. Appr. Slab	280+98.72	68.84	576.82

3/19/2013 2:42:08 PM 08101194.64D23.015-ApprSlabElevEBE.04.dgn

Wight

DESIGNED - BJM	REVISED -	
CHECKED - MWS	REVISED -	
DRAWN - MWS	REVISED -	
PLOT DATE = 3/19/2013	CHECKED - BJM	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOP OF EAST APPROACH SLAB ELEVATIONS
STRUCTURE NO. 081-0194 (E.B.)

SHEET NO. 15 OF 38 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74/280	81-3BR	ROCK ISLAND	290	178

CONTRACT NO. 64D23

ILLINOIS FED. AID PROJECT