

# STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths					
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	
5	1'-9''	2'-5"	2'-7''	2'-11''	
6	2'-1''	2'-11''	3'-1''	3'-6''	
7	2'-9''	3'-10''	4'-2"	4'-8''	
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	
9	4'-7''	6′-5′′	6'-10''	7′-9′′	

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Bridge Deck

Threaded

couplers (E)

Reinforcement

Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Threaded splicer bar length = min. lap length +  $1^{l_2}$ " + thread length

Approach Slab


6'-0"

Threaded splicer

bar (E)

\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


l ocation	Bar	No. assemblies	Table for minimum
Locarion	size	required	lap length
S.B. Lanes - Deck	#5	40	3
N.B. Lanes - Deck	#5	40	3
S.B. Lanes - Hatch Block	#6	16	4
N.B. Lanes - Hatch Block	#6	16	4

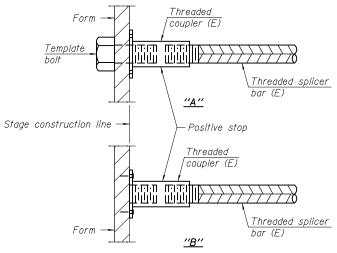

# INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

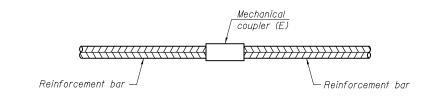

### STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required


# <u>NOTES</u>

Splicer bars shall be deformed  $\overline{\text{with thre}}$  and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

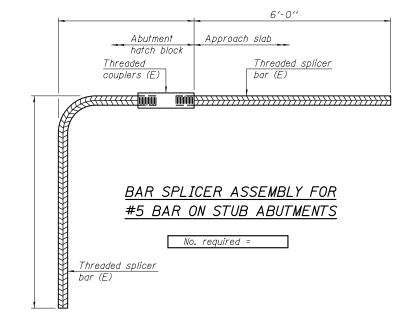

# <u>BAR SPLICER DETAILS</u> S.N. 082-0241 (NB) & S.N. 082-0242 (SB)

BSD-1

7-1-10

Threaded splicer

bar (E)

	7 1 10		
FILE NAME =	USER NAME =	DESIGNED	REVISED
		CHECKED	REVISED
	PLOT SCALE =	DRAWN	REVISED
	PLOT DATE =	CHECKED	REVISED

BAR SPLICER ASSEMBLY FOR #5 BAR ON

INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No, required =



Allen Henderson & Associates, Inc. Civil and Structural Engineers Springfield, IL. 62703 Phone: (217)544–8033 IL. Design Firm No. 184–001907

BAR	SPLICER	ASSEMBLY	AND	MECHANICAL	SPLICER	DETAILS
STRUCTURE NO.						
		SHEET	NO. 22	OF 22 SHEETS		