

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00116-00-SG	WOODFORD	18	01

04-26-13 LETTING ITEM 185

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PROPOSED HIGHWAY PLANS
SIGN MODERNIZATION

INDEX OF SHEETS


SHEET NO.	DESCRIPTION
1	COVER
2	SUMMARY OF QUANTITIES
3	COUNTY SCHEDULES
4-12	TOWNSHIP SCHEDULES
12-18	MUNICIPALITY SCHEDULES

VARIOUS ROUTES
SECTION 10-00116-00-SG
PROJECT HSIP 0203(025)
WOODFORD COUNTY
CONTRACT: 89628
C-94-129-10



IDOT HIGHWAY STANDARDS

- 000001-~~01~~ STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701201-04 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
- 701301-04 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701336-06 LANE CLOSURE, 2L, 2W, WORK AREAS IN SERIES FOR SPEEDS > 45 MPH
- 701901-02 TRAFFIC CONTROL DEVICES
- 720001-01 SIGN PANEL MOUNTING DETAILS
- 728001-01 TELESCOPING STEEL SIGN SUPPORT
- 731001-01 BASE FOR TELESCOPING STEEL SIGN SUPPORT

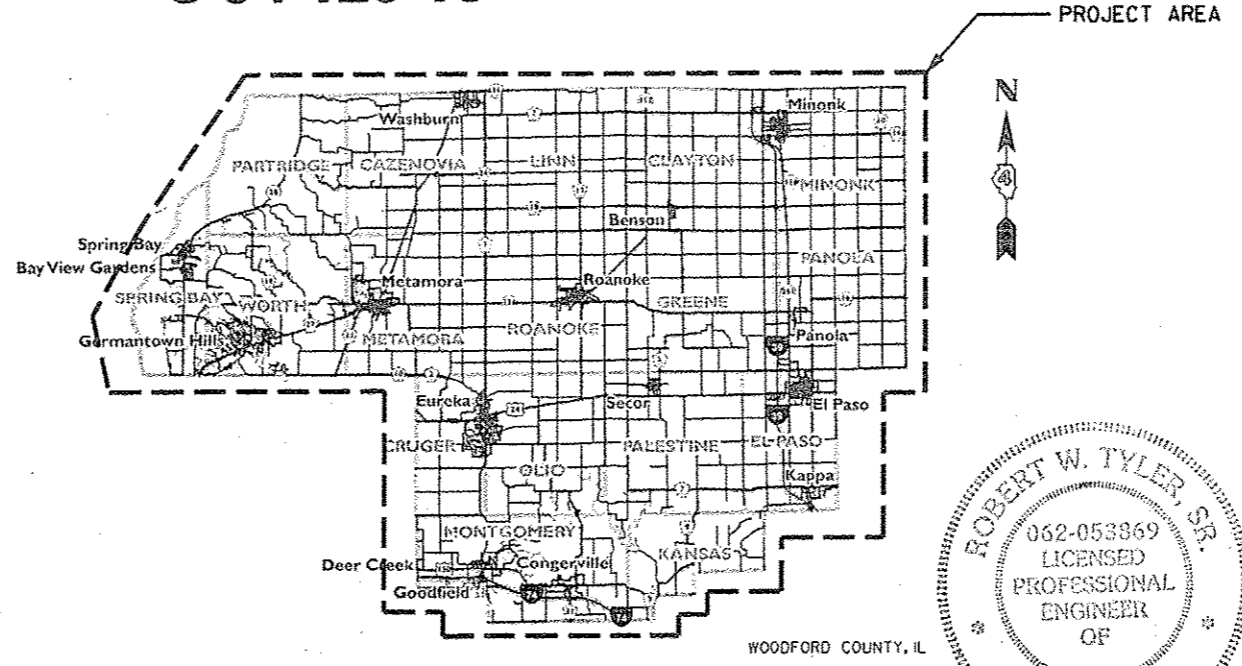

APPROVED *[Signature]* 3/1/2013
COUNTY ENGINEER

PASSED *[Signature]* 02/05/2013
DISTRICT POLICE ENGINEER OF
LOCAL ROADS & STREETS

Releasing For Bid Based on Limited Review
[Signature] 7/2013
DEPUTY DIRECTOR OF HIGHWAYS,
REGION THREE ENGINEER
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

WARNING



CALL BEFORE YOU DIG

LENGTH OF PROJECT: VARIES

DESCRIPTION: THE PROPOSED IMPROVEMENT INCLUDES SIGN MODERNIZATION FOR VARIOUS LOCAL AGENCIES IN WOODFORD COUNTY.

ROADWAY CLASSIFICATION: LOCAL ROADS
CURRENT ADT: VARIES
DESIGN ADT: VARIES
DESIGN GUIDELINES: VARIES
VARIANCES: NONE
COMMITMENTS: NONE


J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

CONTRACT NO. 89628

THESE PLANS HAVE BEEN PREPARED BY OR UNDER THE DIRECTION OF:

DATE: *[Signature]* 3/1/2013
BY: *[Signature]* Robert W. Tyler, P.E.
LICENSE EXPIRES: 11-30-13

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS



**WOODFORD COUNTY
HIGHWAY DEPARTMENT**
ROBERT W. TYLER, P.E. - COUNTY ENGINEER
301 S. Main St.
Roanoke, IL 61561
TEL: 309-923-2891
www.woodfordhighway.org

SUBTOTAL QUANTITIES

PAY ITEM	DESCRIPTION	SUB-TOTAL QUANTITY	UNIT	WOODFORD COUNTY	CAZENOVIA TOWNSHIP	CLAYTON TOWNSHIP	CRUGER TOWNSHIP	EL PASO TOWNSHIP	GREENE TOWNSHIP	KANSAS TOWNSHIP	LINN TOWNSHIP	METAMORA TOWNSHIP	MINONK TOWNSHIP	MONTGOMERY TOWNSHIP	OLIO TOWNSHIP	PALESTINE TOWNSHIP	PANOLA TOWNSHIP	PARTRIDGE TOWNSHIP	ROANOKE TOWNSHIP
72000100	SIGN PANEL - TYPE 1	25804	SQ FT	10543.2	1435.5	808.4	582.8	750.0	1095.0	470.1	719.5	1441.8	648.8	1474.9	1160.1	1895.0	570.0	1297.3	912.0
72000200	SIGN PANEL - TYPE 2	268	SQ FT	110.8	0.0	0.0	0.0	0.0	47.3	0.0	0.0	47.3	0.0	0.0	0.0	0.0	63.0	0.0	0.0
72800100	TELESCOPING STEEL SIGN SUPPORT	5100	FOOT	60	0	336	108	0	288	0	0	0	0	2304	576	1428	0	0	0
72900100	METAL POST - TYPE A	0	FOOT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
72900200	METAL POST - TYPE B	0	FOOT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
73100100	BASE FOR TELESCOPING STEEL SIGN SUPPORT	425	EACH	5	0	28	9	0	24	0	0	0	0	192	48	119	0	0	0
X7240195	REMOVE EXISTING SIGN PANEL	5242	EACH	2132	298	165	128	158	218	100	138	313	113	325	208	386	110	260	190
X7300105	WOOD SUPPORT 4x4	1440	FOOT	0	0	0	0	0	0	0	0	828	276	0	0	0	336	0	0
X7300105	WOOD SUPPORT 4x6	2052	FOOT	0	288	0	0	324	0	648	276	0	0	0	0	0	0	204	312
X7350010	SIGN SUPPORT BRACKET	119	EACH	10	11	11	3	4	17	0	5	13	5	17	4	8	4	3	4
Z0051398	REMOVE EXISTING SIGN POST	716	EACH	5	24	28	9	27	24	54	23	69	23	192	48	119	28	17	26
67100100	MOBILIZATION	0.48	LSUM	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
X7010216	TRAFFIC CONTROL AND PROTECTION	0.48	LSUM	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03

TOTAL QUANTITIES

PAY ITEM	DESCRIPTION	TOTAL QUANTITY	UNIT
72000100	SIGN PANEL - TYPE 1	40471	SQ FT
72000200	SIGN PANEL - TYPE 2	278	SQ FT
72800100	TELESCOPING STEEL SIGN SUPPORT	5796	FOOT
72900100	METAL POST - TYPE A	2016	FOOT
72900200	METAL POST - TYPE B	60	FOOT
73100100	BASE FOR TELESCOPING STEEL SIGN SUPPORT	483	EACH
X7240195	REMOVE EXISTING SIGN PANEL	8152	EACH
X7300105	WOOD: <i>Sign Support SPL</i>	3780	FOOT
X7350010	SIGN SUPPORT BRACKET	152	EACH
Z0051398	REMOVE EXISTING SIGN POST	968	EACH
67100100	MOBILIZATION	1	LSUM
X7010216	TRAFFIC CONTROL AND PROTECTION <i>SPL</i>	1	LSUM

PAY ITEM	DESCRIPTION	SUB-TOTAL QUANTITY	UNIT	SPRING BAY TOWNSHIP	WORTH TOWNSHIP	VILLAGE OF BAYVIEW/GARDENS	VILLAGE OF BENSON	VILLAGE OF CONSERVILLE	CITY OF EL PASO	CITY OF EUREKA	VILLAGE OF GERMANTOWN HILLS	VILLAGE OF GOODFIELD	VILLAGE OF KAPPA	VILLAGE OF METAMORA	CITY OF MINONK	VILLAGE OF PANOLA	VILLAGE OF ROANOKE	VILLAGE OF SECOR	VILLAGE OF SPRING BAY	VILLAGE OF WASHBURN
72000100	SIGN PANEL - TYPE 1	14667	SQ FT	928.3	2654.6	333.8	348.8	110.0	1561.6	1249.7	1122.5	335.6	218.6	1419.4	1857.0	15.5	993.2	462.8	421.5	634.1
72000200	SIGN PANEL - TYPE 2	10	SQ FT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72800100	TELESCOPING STEEL SIGN SUPPORT	696	FOOT	0	0	72	0	0	0	0	0	0	24	48	108	0	264	60	0	120
72900100	METAL POST - TYPE A	2016	FOOT	0	0	0	0	0	0	1824	0	0	0	0	0	0	0	0	192	0
72900200	METAL POST - TYPE B	60	FOOT	0	0	0	0	60	0	0	0	0	0	0	0	0	0	0	0	0
73100100	BASE FOR TELESCOPING STEEL SIGN SUPPORT	58	EACH	0	0	6	0	0	0	0	0	0	2	4	9	0	22	5	0	10
X7240195	REMOVE EXISTING SIGN PANEL	2910	EACH	189	509	69	57	23	320	236	218	59	43	277	395	3	221	87	71	133
X7300105	WOOD SUPPORT 4x4	156	FOOT	0	60	0	0	0	96	0	0	0	0	0	0	0	0	0	0	0
X7300105	WOOD SUPPORT 4x6	132	FOOT	36	0	0	96	0	0	0	0	0	0	0	0	0	0	0	0	0
X7350010	SIGN SUPPORT BRACKET	33	EACH	1	16	0	0	2	1	0	0	0	0	3	2	0	6	2	0	0
Z0051398	REMOVE EXISTING SIGN POST	252	EACH	0	5	6	8	5	8	152	0	0	2	4	9	0	22	5	16	10
67100100	MOBILIZATION	0.51	LSUM	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
X7010216	TRAFFIC CONTROL AND PROTECTION	0.51	LSUM	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03

NOTE:

ALL SIGNS SHALL CONFORM TO THE 2009 MUTCD AND CORRESPONDING IL SUPPLEMENT. ALL SIGNS SHALL MEET THE DIMENSIONS NOTED FOR A SINGLE LANE CONVENTIONAL ROAD UNLESS OTHERWISE NOTED.

A COMPLETE INVENTORY OF EACH LOCAL AGENCY SHALL BE PROVIDED UPON AWARD OF THE CONTRACT. THE INVENTORY CONTAINS THE EXACT WORDING AND LOCATION FOR EACH SIGN.

THE FOLLOWING TABLE WAS USED TO DETERMINE THE TYPE FOR SIGN PANELS:

- TYPE 1 9 SOFT OR LESS
- TYPE 2 9 SOFT TO 24 SOFT
- TYPE 3 24 SOFT OR MORE

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - BVI	REVISED -
DATE - 08/14/12	REVISED -

Woodford County
Highway Department

Summary of Quantities

SCALE: _____ SHEET NO. 02 OF 18 SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-SG	Woodford	18	02
FEDERAL-AID PROJECT			CONTRACT: 89628	

Woodford County						72000100	72000200
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)		
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	46	138.00			
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	53	159.00			
STOP	R1-1	30X30	274	1712.50			
STOP	R1-1	36X36	17	153.00			
ALL WAY	R1-3P	18X06	10	7.50			
SPEED LIMIT 25	R2-1	24X30	11	55.00			
SPEED LIMIT 30	R2-1	24X30	23	115.00			
SPEED LIMIT 35	R2-1	24X30	24	120.00			
SPEED LIMIT 40	R2-1	24X30	9	45.00			
SPEED LIMIT 45	R2-1	24X30	42	210.00			
SPEED LIMIT 50	R2-1	24X30	4	20.00			
SPEED LIMIT 55	R2-1	24X30	16	80.00			
LEFT TURN LANE (TEXT)	R3-1100	24X24	1	4.00			
DO NOT PASS	R4-1	24X30	3	15.00			
PASS WITH CARE	R4-2	24X30	204	1020.00			
KEEP RIGHT	R4-7	24X30	2	10.00			
CLASS III TRUCK ROUTE	R5-1102a	24X24	2	8.00			
WEIGHT LIMIT	R12-5	24X36	70	420.00			
BRIDGE WEIGHT LIMIT	R12-1100	54X42	5	78.75			
0.8 MILES AHEAD	R12-1102P	54X12	1	4.50			
2.2 MILES AHEAD	R12-1102P	54X12	1	4.50			
SEASONAL WEIGHT LIMIT	R12-1104	18X24	95	285.00			
SCHOOL	S1-1	36X36	2	18.00			
SCHOOL BUS STOP AHEAD	S3-1	36X36	8	72.00			
REDUCED SCHOOL SPEED LIMIT AHEAD	S4-5	36X36	5	45.00			
SCHOOL SPEED LIMIT	S4-1100	24X48	5	40.00			
SCHOOL SPEED LIMIT/DO NOT PASS	S4-1105	48X48	2	32.00			
UNLAWFUL TO PASS STOPPED SCHOOL BUS	S4-1105	30X30	1	6.25			
TURN LEFT	W1-1L	30X30	2	12.50			
TURN RIGHT	W1-1R	30X30	2	12.50			
CURVE LEFT	W1-2L	30X30	36	225.00			
CURVE RIGHT	W1-2R	30X30	34	212.50			
REVERSE TURN LEFT	W1-3L	30X30	1	6.25			
REVERSE CURVE LEFT	W1-4L	30X30	23	143.75			
REVERSE CURVE RIGHT	W1-4R	30X30	27	168.75			
WINDING ROAD LEFT	W1-5L	30X30	8	50.00			
WINDING ROAD RIGHT	W1-5R	30X30	10	62.50			
ONE DIRECTION LARGE ARROW LEFT	W1-6	48X24	3	24.00			
ONE DIRECTION LARGE ARROW RIGHT	W1-6	48X24	2	16.00			
TWO DIRECTION LARGE ARROW	W1-7	48X24	72	576.00			
CHEVRON ALIGNMENT	W1-8	18X24	412	1236.00			
CURVE LEFT WITH SIDE ROAD RIGHT	W1-10L	36X36	1	9.00			
CURVE RIGHT WITH SIDE ROAD LEFT	W1-10R	36X36	1	9.00			
CROSSROAD	W2-1	30X30	8	50.00			
INTERSECTION WARNING SIDE ROAD LEFT	W2-2L	30X30	13	81.25			
INTERSECTION WARNING SIDE ROAD RIGHT	W2-2R	30X30	11	68.75			
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	2	12.50			
OFFSET SIDEROADS LEFT	W2-7L	30X30	2	12.50			
STOP AHEAD SYMBOL	W3-1	30X30	74	462.50			
STOP AHEAD SYMBOL	W3-1	36X36	4	36.00			
REDUCED SPEED LIMIT AHEAD 35 MPH	W3-5	36X36	18	162.00			
TRAFFIC FROM RIGHT DOES NOT STOP	W4-4aP	24X12	1	2.00			
TRAFFIC FROM LEFT DOES NOT STOP	W4-4aP	24X12	1	2.00			
ONCOMING TRAFFIC DOES NOT STOP	W4-4bP	24X12	1	2.00			
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	35	131.25			
NARROW BRIDGE	W5-2	30X30	6	37.50			
DIVIDED HIGHWAY	W6-1	36X36	2	18.00			
HILL SYMBOL	W7-1	30X30	3	18.75			
BUMP	W8-1	30X30	1	6.25			
WATCH FOR ICE ON BRIDGE	W8-1102	36X36	22	198.00			
GRADE CROSSING ADVANCED WARNING	W10-1	36 DIA	8	72.00			
ROUGH CROSSING	W10-15P	30X24	2	10.00			
CAUTION 30 FT BETWEEN TRACKS AND HIGHWAY	W10-1100	30X36	1	7.50			
DEER	W11-3	30X30	12	75.00			
TRACTOR	W11-5	30X30	2	12.50			
WHEEL CHAIR SYMBOL	W11-9	30X30	2	12.50			
TRUCK	W11-10	30X30	2	12.50			
ADVISORY SPEED (PLAQUE) 10 MPH	W13-1P	18X18	2	4.50			
ADVISORY SPEED (PLAQUE) 15 MPH	W13-1P	18X18	1	2.25			
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	3	6.75			
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	2	4.50			
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	4	9.00			
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	13	29.25			
ADVISORY SPEED (PLAQUE) 40 MPH	W13-1P	18X18	36	81.00			
ADVISORY SPEED (PLAQUE) 45 MPH	W13-1P	18X18	12	37.00			
NO PASSING ZONE	W14-3	48X48X36	235	1307.19			
TRUCK ENTRANCE	W16-1101	30X30	4	25.00			
CEMETERY ENTRANCE	W16-1101	30X30	2	12.50			
Total			2117	10543.2	110.8		

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	EACH			2132
Z0051398	EACH			5
72800100	FOOT	12	5	60
73100100	EACH			5
72900100	FOOT	12	0	32
72900200	FOOT	12	0	0
X7300105	EACH			37
X7300105	FOOT	12	0	0
X7350010	FOOT	12	0	0
X7350010	EACH			2053
	EACH			10

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - RBT	REVISED -
DATE - 10/19/12	REVISED -

Woodford County
Highway Department

County Schedule

SCALE: SHEET NO. 03 OF 18 SHEETS STA. TO STA.

P.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-0006-00-5G	Woodford	18	03
	FEDERAL-AID PROJECT		CONTRACT NO. 89628	

GAZENOVIA TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	37	111.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	37	111.00	
STOP	R1-1	30X30	24	150.00	
SPEED LIMIT 25	R2-1	24X30	2	10.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	28	84.00	
TURN LEFT	W1-1L	30X30	7	43.75	
TURN RIGHT	W1-1R	30X30	8	50.00	
CURVE LEFT	W1-2L	30X30	6	37.50	
CURVE RIGHT	W1-2R	30X30	5	31.25	
REVERSE TURN LEFT	W1-3L	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	5	31.25	
REVERSE CURVE RIGHT	W1-4R	30X30	3	18.75	
WINDING ROAD LEFT	W1-5L	30X30	4	25.00	
WINDING ROAD RIGHT	W1-5R	30X30	1	6.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	8	64.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	13	104.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	19	57.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	19	57.00	
CURVE LEFT WITH SIDE ROAD RIGHT	W1-10L	36X36	1	9.00	
CURVE RIGHT WITH SIDE ROAD LEFT	W1-10R	36X36	1	9.00	
INTERSECTION WARNING CROSSROAD	W2-1	30X30	6	37.50	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	9	56.25	
STOP AHEAD SYMBOL	W3-1	30X30	23	143.75	
REDUCED SPEED LIMIT AHEAD 25 MPH	W3-5	36X36	3	27.00	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	4	15.00	
ROAD NARROWS	W5-1	30X30	1	6.25	
ONE LANE BRIDGE	W5-3	30X30	1	6.25	
HILL SYMBOL	W7-1	30X30	3	18.75	
PAVEMENT ENDS	W8-3	36X36	5	45.00	
LOOSE GRAVEL	W8-7	36X36	3	27.00	
ROUGH ROAD	W8-8	36X36	1	9.00	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	2	4.50	
DEAD END	W14-1	30X30	1	6.25	
NO OUTLET	W14-2	30X30	2	12.50	
		TOTAL	295	1435.5	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		298
Z0051398	REMOVE EXISTING SIGN POST	EACH		24
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		3
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		70
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	288
	ASSEMBLY FOR WOOD POST,	EACH		233
X7350010	SIGN SUPPORT BRACKET	EACH		11

1. Incidental items. See special provisions.

CLAYTON TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	15	45.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	19	57.00	
OBJECT MARKER, TY 4	OM4-3	18X18	4	9.00	
STOP	R1-1	30X30	33	206.25	
YIELD	R1-2	36X36X36	1	3.90	
ROAD ENDS	R11-1100	36X30	1	7.50	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	26	78.00	
CURVE LEFT	W1-2L	30X30	2	12.50	
CURVE RIGHT	W1-2R	30X30	3	18.75	
REVERSE CURVE RIGHT	W1-4R	30X30	5	31.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	7	56.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	8	64.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	1	3.00	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	7	43.75	
STOP AHEAD SYMBOL	W3-1	30X30	21	131.25	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	3	11.25	
ROAD ENDS 500 FT	W8-1108	30X30	1	6.25	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 40 MPH	W13-1P	18X18	4	9.00	
DEAD END	W14-1	30X30	2	12.50	
		TOTAL	164	808.4	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		165
Z0051398	REMOVE EXISTING SIGN POST	EACH		28
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	336
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		28
	ASSEMBLY FOR TELESCOPING POST,	EACH		35
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		14
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		127
X7350010	SIGN SUPPORT BRACKET	EACH		11

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - BHI	REVISED -
DATE - 08/14/12	REVISED -

Woodford County
Highway Department

Township Schedule

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-5G	Woodford	18	04
FEDERAL-AID PROJECT			CONTRACT NO.: 89628	

SCALE: SHEET NO. 04 OF 18 SHEETS STA. TO STA.

CRUGER TOWNSHIP					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	3	9.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	26	78.00	
STOP	R1-1	30X30	14	87.50	
SPEED LIMIT 25	R2-1	24X30	3	15.00	
WEIGHT LIMIT 8 TONS	R12-1	24X30	1	5.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	15	45.00	
TURN RIGHT	W1-1R	30X30	2	12.50	
CURVE LEFT	W1-2L	30X30	2	12.50	
CURVE RIGHT	W1-2R	30X30	2	12.50	
REVERSE TURN LEFT	W1-3L	30X30	1	6.25	
REVERSE TURN RIGHT	W1-3R	30X30	2	12.50	
REVERSE CURVE LEFT	W1-4L	30X30	2	12.50	
REVERSE CURVE RIGHT	W1-4R	30X30	3	18.75	
ONE DIRECTION LARGE ARROW	W1-6	48X24	5	40.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	3	24.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	5	15.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	7	21.00	
CURVE LEFT WITH SIDE ROAD RIGHT	W1-10L	36X36	1	9.00	
CURVE RIGHT WITH SIDE ROAD LEFT	W1-10R	36X36	1	9.00	
STOP AHEAD SYMBOL	W3-1	30X30	13	81.25	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	2	7.50	
GRADE CROSSING ADVANCED WARNING	W10-1	36 DIA	2	18.00	
ADVISORY SPEED (PLAQUE) 15 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 40 MPH	W13-1P	18X18	5	11.25	
ADVISORY SPEED (PLAQUE) 45 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	1	6.25	
TOTAL			127	582.8	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		128
Z0051398	REMOVE EXISTING SIGN POST	EACH		9
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	108
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		9
	ASSEMBLY FOR TELESCOPING POST,	EACH		17
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		72
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		43
X7350010	SIGN SUPPORT BRACKET	EACH		3

1. Incidental items. See special provisions.

EL PASO TOWNSHIP					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	19	57.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	19	57.00	
OBJECT MARKER, TY 4	OM4-3	18X18	8	18.00	
STOP	R1-1	30X30	12	75.00	
SPEED LIMIT 20	R2-1	24X30	2	10.00	
SPEED LIMIT 30	R2-1	24X30	3	15.00	
SPEED LIMIT 45	R2-1	24X30	3	15.00	
ROAD ENDS	R11-1100	36X30	4	30.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	18	54.00	
SCHOOL BUS STOP AHEAD	S3-1	36X36	1	9.00	
TURN LEFT	W1-1L	30X30	1	6.25	
TURN RIGHT	W1-1R	30X30	3	18.75	
ONE DIRECTION LARGE ARROW	W1-6	48X24	4	32.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	3	24.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	1	3.00	
STOP AHEAD SYMBOL	W3-1	30X30	23	143.75	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	12	45.00	
HILL BLOCKS VIEW	W7-6	30X30	5	31.25	
ROAD ENDS 500 FT	W8-1108	30X30	3	18.75	
GRADE CROSSING ADVANCED WARNING	W10-1	36 DIA	2	18.00	
ADVISORY SPEED (PLAQUE) 10 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	8	50.00	
NO OUTLET	W14-2	30X30	2	12.50	
TOTAL			159	750.0	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		198
Z0051398	REMOVE EXISTING SIGN POST	EACH		27
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		0
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		43
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	27
	ASSEMBLY FOR WOOD POST,	EACH		119
X7350010	SIGN SUPPORT BRACKET	EACH		4

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 04/30/2013
DRAWN - KK	REVISED -
CHECKED - RWI	REVISED -
DATE - 10/19/12	REVISED -

Woodford County
Highway Department

Township Schedule

SCALE:	SHEET NO. 05 OF 18 SHEETS	STA. TO STA.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				10-00016-00-50	Woodford	18	05
				FEDERAL-AID PROJECT			CONTRACT NO.: 89628

GREENE TOWNSHIP					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	16	48.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	27	81.00	
RED OBJECT MARKER, TY 4	OM4-3	18X18	6	13.50	
STOP	R1-1	30X30	29	181.25	
ROAD ENDS	R11-2	36X30	2	15.00	
BRIDGE WEIGHT LIMIT - TONS SV COMBO 28T 28T	R12-1100	54X42	3		47.25
1.4 MILES AHEAD	R12-1102P	54X12	1	4.50	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	36	108.00	
TURN LEFT	W1-1L	36X36	6	54.00	
TURN RIGHT	W1-1R	36X36	6	54.00	
CURVE LEFT	W1-2L	30X30	1	6.25	
REVERSE TURN LEFT	W1-3L	30X30	4	25.00	
REVERSE TURN RIGHT	W1-3R	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	6	37.50	
REVERSE CURVE RIGHT	W1-4R	30X30	1	6.25	
WINDING ROAD LEFT	W1-5L	30X30	1	6.25	
WINDING ROAD RIGHT	W1-5R	30X30	1	6.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	2	16.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	15	120.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	4	12.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	1	3.00	
INTERSECTION WARNING - SIDE ROAD RIGHT	W2-2R	30X30	1	6.25	
INTERSECTION WARNING - T-SYMBOL	W2-4	30X30	1	6.25	
STOP AHEAD SYMBOL	W3-1	30X30	15	93.75	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	3	11.25	
ONE LANE BRIDGE	W5-3	30X30	1	6.25	
HILL (SYMBOL)	W7-1	30X30	1	6.25	
HILL BLOCKS VIEW	W7-6	30X30	8	50.00	
PAVEMENT ENDS	W8-3	36X36	1	9.00	
LOOSE GRAVEL	W8-7	36X36	2	18.00	
LOW SHOULDER	W8-9	36X36	4	36.00	
WATCH FOR ICE ON BRIDGE	W8-1102	36X36	2	18.00	
ADVISORY SPEED (PLAQUE) 10 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	2	4.50	
DEAD END	W14-1	30X30	3	18.75	
ROAD CLOSED 500FT	W20-3	30X30	2	12.50	
		TOTAL	218	1095.0	47.3

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		218
Z0051398	REMOVE EXISTING SIGN POST	EACH		24
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	288
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		24
	ASSEMBLY FOR TELESCOPING POST,	EACH		26
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		49
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		160
X7350010	SIGN SUPPORT BRACKET	EACH		17

1. Incidental items. See special provisions.

KANSAS TOWNSHIP					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	11	33.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	17	51.00	
OBJECT MARKER, TY 4	OM4-3	18X18	3	6.75	
STOP	R1-1	30X30	4	25.00	
YIELD	R1-2	36X36X36	4	15.58	
SPEED LIMIT 35	R2-1	24X36	4	24.00	
SPEED LIMIT 40	R2-1	24X36	3	18.00	
KEEP (ARROW) RIGHT	R4-7A	24X30	1	5.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	5	15.00	
TURN LEFT	W1-1L	30X30	3	18.75	
TURN RIGHT	W1-1R	30X30	3	18.75	
CURVE LEFT	W1-2L	30X30	8	50.00	
CURVE RIGHT	W1-2R	30X30	7	43.75	
WINDING ROAD LEFT	W1-5L	30X30	3	18.75	
WINDING ROAD RIGHT	W1-5R	30X30	1	6.25	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	1	3.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	3	9.00	
INTERSECTION WARNING - SIDE ROAD RIGHT	W2-2R	30X30	1	6.25	
INTERSECTION WARNING - T-SYMBOL	W2-4	30X30	3	18.75	
STOP AHEAD SYMBOL	W3-1	30X30	7	43.75	
HILL (SYMBOL)	W7-1	30X30	1	6.25	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	4	25.00	
NO OUTLET	W14-2	30X30	1	6.25	
		TOTAL	99	470.1	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY	
X7240195	REMOVE EXISTING SIGN PANEL	EACH		100	
Z0051398	REMOVE EXISTING SIGN POST	EACH		54	
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0	
	ASSEMBLY FOR TELESCOPING POST,	EACH		0	
72900100	METAL POST, TY A	FOOT	12	0	
72900200	METAL POST, TY B	FOOT	12	0	
	ASSEMBLY FOR METAL POST,	EACH		27	
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	54	648
	ASSEMBLY FOR WOOD POST,	EACH		74	
X7350010	SIGN SUPPORT BRACKET	EACH		0	

1. Incidental items. See special provisions.

DESIGNED	KK	REVISED	KK 01/30/2015
DRAWN	KK	REVISED	
CHECKED	BWI	REVISED	
DATE	10/19/12	REVISED	

Woodford County
Highway Department

Township Schedule

SCALE: SHEET NO. 06 OF 18 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-SC	Woodford	18	06
	FEDERAL-AID PROJECT		CONTRACT NO. 09628	

LINN TOWNSHIP					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	11	33.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	19	57.00	
STOP	R1-1	30X30	32	200.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-I104	18X24	14	42.00	
TURN RIGHT	W1-1R	30X30	2	12.50	
REVERSE TURN RIGHT	W1-3R	30X30	4	25.00	
REVERSE CURVE LEFT	W1-4L	30X30	5	31.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	6	48.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	9	72.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	3	9.00	
INTERSECTION WARNING - T SYMBOL	W2-4	30X30	8	50.00	
STOP AHEAD SYMBOL	W3-1	30X30	11	68.75	
CROSS TRAFFIC DOES NOT STOP	W4-I100	30X18	5	18.75	
HILL BLOCKS VIEW	W7-6	30X30	8	50.00	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	1	2.25	
		TOTAL	138	719.5	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			138
Z0051398	REMOVE EXISTING SIGN POST	EACH			23
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			0
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			12
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	23	276
	ASSEMBLY FOR WOOD POST,	EACH			131
X7350010	SIGN SUPPORT BRACKET	EACH			5

1. Incidental items. See special provisions.

METAMORA TOWNSHIP					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	42	126.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	41	123.00	
STOP	R1-1	30X30	41	256.25	
ALL WAY (PLAQUE)	R1-3P	18X06	3	2.25	
SPEED LIMIT 30	R2-1	24X30	5	25.00	
BRIDGE WEIGHT LIMIT - TONS SV 22T COMBO 29T 36T	R12-I100	54X42	3		47.25
0.9 MILES AHEAD	R12-I102P	54X12	1	4.50	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-I104	18X24	41	123.00	
TURN LEFT	W1-1L	30X30	2	12.50	
TURN RIGHT	W1-1R	30X30	2	12.50	
CURVE LEFT	W1-2L	30X30	6	37.50	
CURVE RIGHT	W1-2R	30X30	9	56.25	
REVERSE TURN LEFT	W1-3L	30X30	1	6.25	
REVERSE TURN RIGHT	W1-3R	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	4	25.00	
REVERSE CURVE RIGHT	W1-4R	30X30	3	18.75	
WINDING ROAD LEFT	W1-5L	30X30	1	6.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	1	8.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	10	80.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	7	21.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	8	24.00	
INTERSECTION WARNING - T SYMBOL	W2-4	30X30	21	131.25	
STOP AHEAD SYMBOL	W3-1	30X30	21	131.25	
REDUCED SPEED LIMIT SIGN, 30 MPH	W3-5	36X36	1	9.00	
CROSS TRAFFIC DOES NOT STOP	W4-I100	30X18	14	52.50	
ROAD NARROWS	W5-1	30X30	1	6.25	
NARROW BRIDGE	W5-2	30X30	2	12.50	
ONE LANE BRIDGE	W5-3	30X30	4	25.00	
HILL (SYMBOL)	W7-1	30X30	1	6.25	
PAVEMENT ENDS	W8-3	36X36	5	45.00	
LOOSE GRAVEL	W8-7	36X36	2	18.00	
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	3	6.75	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	3	6.75	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	2	4.50	
NO OUTLET	W14-2	30X30	1	6.25	
HIDDEN ENTRANCE	W16-I101	30X30	1	6.25	
		TOTAL	314	1441.8	47.3

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			313
Z0051398	REMOVE EXISTING SIGN POST	EACH			69
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			8
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			35
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	69	828
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			283
X7350010	SIGN SUPPORT BRACKET	EACH			13

1. Incidental items. See special provisions.

DESIGNED	KS	REVISED	KK 01/30/2013
DRAWN	KS	REVISED	
CHECKED	BWT	REVISED	
DATE	10/19/12	REVISED	

Woodford County
Highway Department

Township Schedule

SCALE: SHEET NO. 01 OF 10 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-SC	Woodford	10	07
FEDERAL-AID PROJECT			CONTRACT NO.: 89628	

MINONK TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	1	3.00	
OBJECT MARKER, TY 4	OM4-3	18X18	8	18.00	
STOP	R1-1	30X30	35	218.75	
SPEED LIMIT 35	R2-1	24X30	3	15.00	
SPEED LIMIT 45	R2-1	24X30	2	10.00	
SPEED LIMIT 55	R2-1	24X30	1	5.00	
DO NOT PASS	R4-1	24X30	4	20.00	
PASS WITH CARE	R4-2	24X30	4	20.00	
ROAD ENDS	R11-1100	36X30	4	30.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	6	18.00	
TURN RIGHT	W1-1R	30X30	1	6.25	
CURVE RIGHT	W1-2R	30X30	1	6.25	
REVERSE TURN LEFT	W1-3L	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	3	18.75	
ONE DIRECTION LARGE ARROW	W1-6	48X24	1	8.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	6	48.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	1	3.00	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	2	12.50	
STOP AHEAD SYMBOL	W3-1	30X30	10	62.50	
REDUCED SPEED LIMIT AHEAD 35 MPH	W3-5	36X36	1	9.00	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	2	7.50	
DIVIDED HIGHWAY	W6-1	36X36	1	9.00	
PAVEMENT ENDS	W8-3	36X36	1	9.00	
SOFT SHOULDER	W8-4	36X36	1	9.00	
LOOSE GRAVEL	W8-7	36X36	1	9.00	
ROAD ENDS 500 FT	W8-1108	30X30	4	25.00	
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	5	31.25	
NO OUTLET	W14-2	30X30	1	6.25	
		TOTAL	113	648.8	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		113
Z0051398	REMOVE EXISTING SIGN POST	EACH		23
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		2
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		7
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	23
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		108
X7350010	SIGN SUPPORT BRACKET	EACH		5

1. Incidental items. See special provisions.

MONTGOMERY TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	50	150.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	60	180.00	
OBJECT MARKER, TY 4	OM4-3	18X18	7	15.75	
STOP	R1-1	30X30	13	81.25	
YIELD	R1-2	36X36X36	1	3.90	
SPEED LIMIT 25	R2-1	24X30	1	5.00	
SPEED LIMIT 30	R2-1	24X30	1	5.00	
SPEED LIMIT 40	R2-1	24X30	8	40.00	
SPEED LIMIT 45	R2-1	24X30	4	20.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	26	78.00	
TURN LEFT	W1-1L	30X30	17	106.25	
TURN RIGHT	W1-1R	30X30	20	125.00	
CURVE LEFT	W1-2L	30X30	2	12.50	
CURVE RIGHT	W1-2R	30X30	1	6.25	
REVERSE TURN LEFT	W1-3L	30X30	2	12.50	
REVERSE TURN RIGHT	W1-3R	30X30	2	12.50	
REVERSE CURVE LEFT	W1-4L	30X30	2	12.50	
WINDING ROAD LEFT	W1-5L	30X30	4	25.00	
ONE DIRECTION LARGE ARROW	W1-6	48X24	13	104.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	13	104.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	11	33.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	13	39.00	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	8	50.00	
INTERSECTION WARNING Y-SYMBOL	W2-5	30X30	1	6.25	
STOP AHEAD SYMBOL	W3-1	30X30	16	100.00	
REDUCED SPEED LIMIT AHEAD 25 MPH	W3-5	36X36	4	36.00	
ONE LANE BRIDGE	W5-3	30X30	1	6.25	
HILL BLOCKS VIEW	W7-6	30X30	1	6.25	
PAVEMENT ENDS	W8-3	36X36	1	9.00	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	7	43.75	
NO OUTLET	W14-2	30X30	6	37.50	
TRUCK ENTRANCE	W16-1101	30X30	1	6.25	
		TOTAL	318	1474.9	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		325
Z0051398	REMOVE EXISTING SIGN POST	EACH		192
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	192
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		192
	ASSEMBLY FOR TELESCOPING POST,	EACH		235
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		105
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		1
X7350010	SIGN SUPPORT BRACKET	EACH		17

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - BWT	REVISED -
DATE - 10/19/12	REVISED -

Woodford County
Highway Department

Township Schedule

SCALE: _____	SHEET NO. 08 OF 18 SHEETS	STA. _____ TO STA. _____	F.A. RTE. _____	SECTION _____	COUNTY _____	TOTAL SHEETS _____	SHEET NO. _____
			FEDERAL-AID PROJECT		CONTRACT NO. 89628		

OLIO TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ FT)	AREA - TY 2 (SQ FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	6	18.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	20	60.00	
STOP	R1-1	30X30	30	187.50	
SPEED LIMIT 30	R2-1	24X30	3	15.00	
SPEED LIMIT 40	R2-1	24X30	3	15.00	
SPEED LIMIT 45	R2-1	24X30	1	5.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	30	90.00	
TURN LEFT	W1-1L	30X30	7	43.75	
TURN RIGHT	W1-1R	30X30	7	43.75	
CURVE LEFT	W1-2L	30X30	4	25.00	
CURVE RIGHT	W1-2R	30X30	5	31.25	
REVERSE TURN LEFT	W1-3L	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	6	37.50	
REVERSE CURVE RIGHT	W1-4R	30X30	1	6.25	
WINDING ROAD LEFT	W1-5L	30X30	4	25.00	
WINDING ROAD RIGHT	W1-5R	30X30	2	12.50	
ONE DIRECTION LARGE ARROW	W1-6	48X24	16	128.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	15	120.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	5	15.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	2	6.00	
INTERSECTION WARNING CROSS ROAD	W2-1	30X30	3	18.75	
INTERSECTION WARNING SIDE ROAD LEFT	W2-2L	30X30	2	12.50	
INTERSECTION WARNING SIDE ROAD RIGHT	W2-2R	30X30	2	12.50	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	10	62.50	
STOP AHEAD SYMBOL	W3-1	30X30	10	62.50	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	4	15.00	
ADVANCED WARNING GRADE CROSSING	W10-1	36 DIA	5	45.00	
CAUTION 35 FT BETWEEN TRACKS AND HIGHWAY	W10-1100	30X36	3	22.50	
DEAD END	W14-1	30X30	2	12.50	
NO PASSING ZONE (PENNANT)	W14-3	48X48X36	1	5.56	
		TOTAL	210	1160.1	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			208
Z0051398	REMOVE EXISTING SIGN POST	EACH			48
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	48	576
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			48
	ASSEMBLY FOR TELESCOPING POST,	EACH			51
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			20
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			141
X7350010	SIGN SUPPORT BRACKET	EACH			4

1. Incidental items. See special provisions.

PALESTINE TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ FT)	AREA - TY 2 (SQ FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	38	114.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	56	168.00	
STOP	R1-1	30X30	33	206.25	
SPEED LIMIT 40	R2-1	24X30	3	15.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	33	99.00	
SCHOOL BUS STOP AHEAD	S3-1	36X36	2	18.00	
SCHOOL BUS TURN AHEAD	S3-2	36X36	1	9.00	
TURN LEFT	W1-1L	30X30	7	43.75	
TURN RIGHT	W1-1R	30X30	5	31.25	
CURVE LEFT	W1-2L	30X30	4	25.00	
CURVE RIGHT	W1-2R	30X30	4	25.00	
REVERSE TURN LEFT	W1-3L	30X30	2	12.50	
REVERSE TURN RIGHT	W1-3R	30X30	3	18.75	
REVERSE CURVE LEFT	W1-4L	30X30	1	6.25	
REVERSE CURVE RIGHT	W1-4R	30X30	2	12.50	
ONE DIRECTION LARGE ARROW	W1-6	48X24	15	120.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	17	136.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	11	33.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	3	9.00	
TURN RIGHT WITH SIDE ROAD STRAIGHT	W1-10bR	36X36	1	9.00	
TURN LEFT WITH SIDE ROAD RIGHT	W1-10cL	36X36	1	9.00	
INTERSECTION WARNING CROSSROAD	W2-1	30X30	18	112.50	
INTERSECTION WARNING SIDE ROAD LEFT	W2-2L	30X30	11	68.75	
INTERSECTION WARNING SIDE ROAD RIGHT	W2-2R	30X30	13	81.25	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	9	56.25	
INTERSECTION WARNING OFFSET SIDE ROADS RIGHT	W2-7R	30X30	1	6.25	
STOP AHEAD SYMBOL	W3-1	30X30	22	137.50	
REDUCED SPEED LIMIT AHEAD 40 MPH	W3-5	36X36	4	36.00	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	7	26.25	
TRAFFIC FROM RIGHT DOES NOT STOP	W4-4aP	24X12	1	2.00	
TRAFFIC FROM LEFT DOES NOT STOP	W4-4bP	24X12	1	2.00	
ONCOMING TRAFFIC DOES NOT STOP	W4-4bP	24X12	1	2.00	
HILL SYMBOL	W7-1	30X30	2	12.50	
HILL BLOCKS VIEW	W7-6	30X30	1	6.25	
PAVEMENT ENDS	W8-3	36X36	3	27.00	
ROUGH ROAD	W8-8	36X36	1	9.00	
WATCH FOR ICE ON BRIDGE	W8-1102	36X36	4	36.00	
ADVANCED WARNING GRADE CROSSING	W10-1	36 DIA	4	36.00	
CAUTION 55 FT BETWEEN TRACKS AND HIGHWAY	W10-1100	30X36	1	7.50	
TRUCK (SYMBOL)	W11-10	30X30	3	18.75	
ADVISORY SPEED (PLAQUE) 10 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 15 MPH	W13-1P	18X18	10	22.50	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	4	9.00	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	3	6.75	
DEAD END	W14-1	30X30	3	18.75	
NO OUTLET	W14-2	30X30	4	25.00	
		TOTAL	377	1895.0	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			386
Z0051398	REMOVE EXISTING SIGN POST	EACH			119
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	119	1428
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			119
	ASSEMBLY FOR TELESCOPING POST,	EACH			147
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			108
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			138
X7350010	SIGN SUPPORT BRACKET	EACH			8

1. Incidental items. See special provisions.

DESIGNED - <u>KE</u>	REVISED - <u>KK 01/30/2013</u>
DRAWN - <u>KE</u>	REVISED -
CHECKED - <u>BWJ</u>	REVISED -
DATE - <u>10/19/12</u>	REVISED -

Woodford County
Highway Department

Township Schedule

SCALE:	SHEET NO. 09 OF 18 SHEETS	STA. TO STA.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				10-0006-00-5C	Woodford	18	09
				FEDERAL-AID PROJECT			CONTRACT NO. 89628

PANOLA TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	13	39.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	16	48.00	
STOP	R1-1	30X30	39	243.75	
BRIDGE WEIGHT LIMIT - TONS SV 14T COMBO 18T 22T	R12-1100	54X42	4		63.00
0.4 MILES AHEAD	R12-1102P	54X12	1	4.50	
0.5 MILES AHEAD	R12-1102P	54X12	1	4.50	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	5	15.00	
SCHOOL BUS STOP AHEAD	S3-1	36X36	1	9.00	
TURN LEFT	W1-1L	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	4	25.00	
REVERSE CURVE RIGHT	W1-4R	30X30	2	12.50	
TWO DIRECTION LARGE ARROW	W1-7	48X24	2	16.00	
STOP AHEAD SYMBOL	W3-1	30X30	11	68.75	
PAVEMENT ENDS	W8-3	36X36	4	36.00	
LOOSE GRAVEL	W8-7	36X36	3	27.00	
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	2	12.50	
		TOTAL	110	570.0	63.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		110
Z0051398	REMOVE EXISTING SIGN POST	EACH		28
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		1
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		14
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	28
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		99
X7350010	SIGN SUPPORT BRACKET	EACH		4

1. Incidental items. See special provisions.

PARTRIDGE TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	6	18.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	10	30.00	
STOP	R1-1	30X30	8	50.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	9	27.00	
TURN LEFT	W1-1L	30X30	16	100.00	
TURN RIGHT	W1-1R	30X30	17	106.25	
CURVE LEFT	W1-2L	30X30	6	37.50	
CURVE RIGHT	W1-2R	30X30	6	37.50	
REVERSE TURN LEFT	W1-3L	30X30	2	12.50	
REVERSE TURN RIGHT	W1-3R	30X30	2	12.50	
REVERSE CURVE LEFT	W1-4L	30X30	1	6.25	
REVERSE CURVE RIGHT	W1-4R	30X30	3	18.75	
WINDING ROAD LEFT	W1-5L	30X30	11	68.75	
WINDING ROAD RIGHT	W1-5R	30X30	7	43.75	
ONE DIRECTION LARGE ARROW	W1-6	48X24	35	280.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	7	56.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	7	21.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	7	21.00	
INTERSECTION WARNING - SIDE ROAD (Y) LEFT	W2-3L	30X30	4	25.00	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	4	25.00	
STOP AHEAD SYMBOL	W3-1	30X30	10	62.50	
HILL SYMBOL	W7-1	30X30	4	25.00	
BUMP	W8-1	30X30	2	12.50	
PAVEMENT ENDS	W8-3	36X36	2	18.00	
ADVISORY SPEED (PLAQUE) 10 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 15 MPH	W13-1P	18X18	40	90.00	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	28	63.00	
DEAD END	W14-1	30X30	2	12.50	
HIDDEN ENTRANCE	W16-1101	30X30	1	6.25	
BLIND ENTRANCE	W16-1101	30X30	1	6.25	
		TOTAL	260	1297.3	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		260
Z0051398	REMOVE EXISTING SIGN POST	EACH		17
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		1
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		12
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	17
	ASSEMBLY FOR WOOD POST,	EACH		250
X7350010	SIGN SUPPORT BRACKET	EACH		3

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - BWT	REVISED -
DATE - 10/19/12	REVISED -

Woodford County
Highway Department

Township Schedule

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-0006-00-SC	Woodford	18	10
FEDERAL-AID PROJECT			CONTRACT NO.: 89628	
SCALE:	SHEET NO. 10 OF 18 SHEETS	STA. TO STA.		

ROANOKE TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	16	48.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	14	42.00	
STOP	R1-1	30X30	41	256.25	
ALL WAY PLAQUE	R1-3P	18X06	5	3.75	
SPEED LIMIT 25	R2-1	24X30	2	10.00	
SPEED LIMIT 35	R2-1	24X30	2	10.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	23	69.00	
REVERSE CURVE LEFT	W1-4L	30X30	1	6.25	
REVERSE CURVE RIGHT	W1-4R	30X30	1	6.25	
TWO DIRECTION LARGE ARROW	W1-7	48X24	9	72.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	9	27.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	7	21.00	
INTERSECTION WARNING CROSSROAD	W2-1	30X30	6	37.50	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	2	12.50	
STOP AHEAD SYMBOL	W3-1	30X30	34	212.50	
REDUCED SPEED LIMIT AHEAD 25 MPH	W3-5	36X36	2	18.00	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	10	37.50	
LOOSE GRAVEL	W8-7	36X36	2	18.00	
ADVISORY SPEED (PLAQUE) 40 MPH	W13-1P	18X18	2	4.50	
		TOTAL	188	912.0	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			190
Z0051398	REMOVE EXISTING SIGN POST	EACH			26
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			10
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			39
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	26	312
	ASSEMBLY FOR WOOD POST,	EACH			143
X7350010	SIGN SUPPORT BRACKET	EACH			4

1. Incidental items. See special provisions.

SPRING BAY TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	10	30.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	11	33.00	
STOP	R1-1	30X30	23	143.75	
YIELD	R1-2	36X36X36	2	7.79	
SPEED LIMIT 30	R2-1	24X30	28	140.00	
SPEED LIMIT 35	R2-1	24X30	10	50.00	
SPEED LIMIT 40	R2-1	24X30	1	5.00	
SPEED LIMIT 45	R2-1	24X30	6	30.00	
SPEED LIMIT 50	R2-1	24X30	6	30.00	
DO NOT PASS	R4-1	24X30	6	30.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	11	33.00	
SCHOOL	S1-1	36X36	3	27.00	
SCHOOL BUS STOP AHEAD	S3-1	36X36	1	9.00	
TURN LEFT	W1-1L	30X30	2	12.50	
TURN RIGHT	W1-1R	30X30	2	12.50	
CURVE LEFT	W1-2L	30X30	3	18.75	
CURVE RIGHT	W1-2R	30X30	3	18.75	
REVERSE TURN LEFT	W1-3L	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	5	31.25	
REVERSE CURVE RIGHT	W1-4R	30X30	2	12.50	
WINDING ROAD LEFT	W1-5L	30X30	1	6.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	2	16.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	3	24.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	7	21.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	7	21.00	
INTERSECTION WARNING SIDE ROAD LEFT	W2-2L	30X30	2	12.50	
INTERSECTION WARNING SIDE ROAD RIGHT	W2-2R	30X30	2	12.50	
STOP AHEAD SYMBOL	W3-1	30X30	12	75.00	
REDUCED SPEED LIMIT AHEAD 35 MPH	W3-5	36X36	2	18.00	
REDUCED SPEED LIMIT AHEAD 45 MPH	W3-5	36X36	1	9.00	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	2	4.50	
ADVISORY SPEED (PLAQUE) 40 MPH	W13-1P	18X18	3	6.75	
DEAD END	W14-1	30X30	2	12.50	
NO OUTLET	W14-2	30X30	1	6.25	
600 FT	W16-2aP	24X12	1	2.00	
		TOTAL	184	928.3	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			189
Z0051398	REMOVE EXISTING SIGN POST	EACH			3
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			0
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			87
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	3	36
	ASSEMBLY FOR WOOD POST,	EACH			100
X7350010	SIGN SUPPORT BRACKET	EACH			1

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013	Woodford County Highway Department	Township Schedule		F.A.R.T.E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
DRAWN - KK	REVISED -		SCALE:	SHEET NO. OF 18 SHEETS	STA. TO STA.	10-00016-00-SC	Woodford	18	11
CHECKED - BHI	REVISED -					FEDERAL-AID PROJECT		CONTRACT NO.: 89628	
DATE - 10/19/12	REVISED -								

WORTH TOWNSHIP					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER, TY 3 - LEFT	OM3-L	12X36	11	33.00	
OBJECT MARKER, TY 3 - RIGHT	OM3-R	12X36	13	39.00	
STOP	R1-1	30X30	78	487.50	
YIELD	R1-2	36X36X36	1	3.90	
SPEED LIMIT 25	R2-1	24X30	14	70.00	
SPEED LIMIT 30	R2-1	24X30	17	85.00	
SPEED LIMIT 35	R2-1	24X30	42	210.00	
SPEED LIMIT 40	R2-1	24X30	30	150.00	
SPEED LIMIT 45	R2-1	24X30	23	115.00	
SPEED LIMIT 50	R2-1	24X30	8	40.00	
DO NOT PASS	R4-1	24X30	4	20.00	
PASS WITH CARE	R4-2	24X30	4	20.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	4	12.00	
SCHOOL BUS STOP AHEAD	S3-1	36X36	2	18.00	
TURN LEFT	W1-1L	30X30	7	43.75	
TURN RIGHT	W1-1R	30X30	8	50.00	
CURVE LEFT	W1-2L	30X30	14	87.50	
CURVE RIGHT	W1-2R	30X30	13	81.25	
REVERSE TURN RIGHT	W1-3R	30X30	1	6.25	
REVERSE CURVE LEFT	W1-4L	30X30	10	62.50	
REVERSE CURVE RIGHT	W1-4R	30X30	10	62.50	
WINDING ROAD LEFT	W1-5L	30X30	9	56.25	
WINDING ROAD RIGHT	W1-5R	30X30	4	25.00	
ONE DIRECTION LARGE ARROW	W1-6	48X24	18	144.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	8	64.00	
CHEVRON ALIGNMENT LEFT	W1-8L	18X24	34	102.00	
CHEVRON ALIGNMENT RIGHT	W1-8R	18X24	25	75.00	
INTERSECTION WARNING SIDE ROAD LEFT	W2-2L	30X30	8	50.00	
INTERSECTION WARNING SIDE ROAD RIGHT	W2-2R	30X30	8	50.00	
INTERSECTION WARNING T-SYMBOL	W2-4	30X30	3	18.75	
INTERSECTION WARNING Y-SYMBOL	W2-5	30X30	3	18.75	
STOP AHEAD SYMBOL	W3-1	30X30	13	81.25	
STOP AHEAD SYMBOL	W3-1	36X36	2	18.00	
REDUCED SPEED LIMIT AHEAD 35 MPH	W3-5	36X36	1	9.00	
NARROW BRIDGE	W5-2	30X30	1	6.25	
HILL SYMBOL	W7-1	30X30	1	6.25	
PAVEMENT ENDS	W8-3	36X36	2	18.00	
LOOSE GRAVEL	W8-7	36X36	2	18.00	
GOLF CART SYMBOL	W11-11	30X30	1	6.25	
ADVISORY SPEED (PLAQUE) 10 MPH	W13-1P	18X18	3	6.75	
ADVISORY SPEED (PLAQUE) 20 MPH	W13-1P	18X18	4	9.00	
ADVISORY SPEED (PLAQUE) 25 MPH	W13-1P	18X18	11	24.75	
ADVISORY SPEED (PLAQUE) 30 MPH	W13-1P	18X18	7	15.75	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	5	11.25	
ADVISORY SPEED (PLAQUE) 40 MPH	W13-1P	18X18	2	4.50	
DEAD END	W14-1	30X30	11	68.75	
NO OUTLET	W14-2	30X30	4	25.00	
CHURCH ENTRANCE	W16-1101	30X30	4	25.00	
		TOTAL	508	2654.6	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			509
Z0051398	REMOVE EXISTING SIGN POST	EACH			5
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST	EACH			6
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST	EACH			91
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	5	60
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST	EACH			427
X7350010	SIGN SUPPORT BRACKET	EACH			16

1. Incidental Items. See special provisions.

DESIGNED - KK	REVISED - KK 06/30/2013	Woodford County Highway Department	Township Schedule		F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
DRAWN - KK	REVISED -		SCALE:	SHEET NO. 12 OF 18 SHEETS	STA. TO STA.	10-00016-00-SC	Woodford	18	12
CHECKED - RWI	REVISED -				FEDERAL-AID PROJECT		CONTRACT NO.: 89628		
DATE - 10/19/12	REVISED -								

VILLAGE OF BAYVIEW GARDENS					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	22	137.50	
ALL WAY (PLAQUE)	R1-3P	18X06	10	7.50	
SPEED LIMIT 20	R2-1	24X30	26	130.00	
SPEED LIMIT 35	R2-1	24X30	3	15.00	
WEIGHT LIMIT 2 TONS	R12-1	24X30	1	5.00	
AXLE WEIGHT LIMIT 2 TONS	R12-2	24X30	4	20.00	
STOP AHEAD SYMBOL	W3-1	30X30	3	18.75	
		TOTAL	69	333.8	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		69
Z0051398	REMOVE EXISTING SIGN POST	EACH		6
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	6
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		72
	ASSEMBLY FOR TELESCOPING POST,	EACH		6
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		0
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	62
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		0
X7350010	SIGN SUPPORT BRACKET	EACH		1
				0

1. Incidental items. See special provisions.

VILLAGE OF BENSON					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	48	300.00	
SPEED LIMIT 25	R2-1	24X30	6	30.00	
T INTERSECTION	W2-4	30X30	2	12.50	
DEAD END	W14-1	30X30	1	6.25	
		TOTAL	57	348.8	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		57
Z0051398	REMOVE EXISTING SIGN POST	EACH		8
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		0
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	0
	ASSEMBLY FOR METAL POST,	EACH		0
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	21
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		8
X7350010	SIGN SUPPORT BRACKET	EACH		34
				0

1. Incidental items. See special provisions.

VILLAGE OF CONGERVILLE					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	9	56.25	
SPEED LIMIT 10	R2-1	24X30	1	5.00	
SPEED LIMIT 15	R2-1	24X30	1	5.00	
SPEED LIMIT 25	R2-1	24X30	3	15.00	
NO TRUCKS (SYMBOL)	R5-2	24X24	1	4.00	
STOP AHEAD (SYMBOL)	W3-1	30X30	1	6.25	
TRAFFIC FROM RIGHT DOES NOT STOP	W4-4aP	24X12	1	2.00	
TRAFFIC FROM LEFT DOES NOT STOP	W4-4aP	24X12	1	2.00	
ONCOMING TRAFFIC DOES NOT STOP	W4-4bP	24X12	1	2.00	
PEDESTRAIN	W11-2	30X30	1	6.25	
DEAD END	W14-1	30X30	1	6.25	
		TOTAL	21	110.0	0.0

PAY ITEM NUMBER	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH		23
Z0051398	REMOVE EXISTING SIGN POST	EACH		5
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH		0
	ASSEMBLY FOR TELESCOPING POST,	EACH		4
72900100	METAL POST, TY A	FOOT	12	0
72900200	METAL POST, TY B	FOOT	12	5
	ASSEMBLY FOR METAL POST,	EACH		60
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	19
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0
	ASSEMBLY FOR WOOD POST,	EACH		0
X7350010	SIGN SUPPORT BRACKET	EACH		2
				2

1. Incidental items. See special provisions.

DESIGNED - KB	REVISED - KK 01/30/2013
DRAWN - KB	REVISED -
CHECKED - BWT	REVISED -
DATE - 10/12/12	REVISED -

Woodford County
Highway Department

Municipal Schedule

SCALE: SHEET NO. 13 OF 18 SHEETS STA. TO STA.

P.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00015-00-SG	Woodford	18	13
CONTRACT NO. 89628				

CITY OF EL PASO					
ITEM DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	139	868.75	
YIELD	R1-2	36X36X36	35	136.35	
ALL WAY (PLAQUE)	R1-3P	18X06	46	34.50	
SPEED LIMIT 15	R2-1	18X24	4	12.00	
SPEED LIMIT 20	R2-1	18X24	4	12.00	
SPEED LIMIT 25	R2-1	18X24	17	51.00	
SPEED LIMIT 30	R2-1	18X24	8	24.00	
SPEED LIMIT 45	R2-1	18X24	1	3.00	
NO LEFT TURN	R3-2	24X24	1	4.00	
NO U TURN	R3-4	24X24	2	8.00	
DO NOT ENTER	R5-1	30X30	2	12.50	
SCHOOL	S1-1	30X30	2	12.50	
SCHOOL SPEED LIMIT	S4-1100	24X48	13	104.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	16	128.00	
STOP AHEAD SYMBOL	W3-1	30X30	7	43.75	
REDUCED SPEED LIMIT AHEAD 45 MPH	W3-5	36X36	1	9.00	
CROSS TRAFFIC DOES NOT STOP	W4-4P	24X12	8	16.00	
TRAFFIC FROM RIGHT DOES NOT STOP	W4-4aP	24X12	1	2.00	
TRAFFIC FROM LEFT DOES NOT STOP	W4-4aP	24X12	1	2.00	
ONCOMING TRAFFIC DOES NOT STOP	W4-4bP	24X12	1	2.00	
RAILROAD AHEAD	W10-1	36 DIA	5	45.00	
DEAD END	W14-1	30X30	5	31.25	
		TOTAL	319	1561.6	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			320
Z0051398	REMOVE EXISTING SIGN POST	EACH			8
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			3
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			46
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	8	96
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			272
X7350010	SIGN SUPPORT BRACKET	EACH			1

1. Incidental items. See special provisions.

CITY OF EUREKA					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	142	887.50	
SPEED LIMIT 5	R2-1	18X24	1	3.00	
SPEED LIMIT 10	R2-1	18X24	5	15.00	
SPEED LIMIT 20	R2-1	18X24	1	3.00	
SPEED LIMIT 25	R2-1	18X24	51	153.00	
NO RIGHT TURN	R3-1	24X24	1	4.00	
DO NOT ENTER	R5-1	30X30	2	12.50	
WRONG WAY	R5-1A	36X24	2	12.00	
ONE WAY	R6-1L	24X30	1	5.00	
ONE WAY DO NOT ENTER	R6-2M	24X18	1	3.00	
STUDENTS CROSSING	S1-1	30X30	2	12.50	
SCHOOL	S4-3P	24X08	3	4.00	
SCHOOL SPEED LIMIT 20	S4-1100	24X48	4	32.00	
CURVE LEFT	W1-4L	30X30	1	6.25	
CURVE RIGHT	W1-4R	30X30	1	6.25	
TWO DIRECTION LARGE ARROW	W1-7	48X24	1	8.00	
CHEVRON	W1-8R	18X24	2	6.00	
INTERSECTION WARNING - STAGGER ROADS RIGHT	W2-7R	30X30	1	6.25	
STOPLIGHT	W3-3	30X30	1	6.25	
25 PLAQUE - YELLOW	W13-1	18X18	1	2.25	
DEAD END	W14-1	30X30	8	50.00	
DEAD END STREET	W14-1a	27X09	1	1.69	
NO OUTLET	W14-2	30X30	1	6.25	
ARROW	W16-7P	24X12	1	2.00	
ARROW	W16-7RP	24X12	1	2.00	
		TOTAL	236	1249.7	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			236
Z0051398	REMOVE EXISTING SIGN POST	EACH			152
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			12
72900100	METAL POST, TY A	FOOT	12	152	1824
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			247
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			2
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

DESIGNED	KS	REVISED	KS 01/30/2013
DRAWN	KS	REVISED	-
CHECKED	BWI	REVISED	-
DATE	10/19/12	REVISED	-

Woodford County
Highway Department

Municipal Schedule

SCALE:	SHEET NO. 14 OF 18 SHEETS	STA. TO STA.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				10-00016-00-SG	Woodford	18	14
						CONTRACT NO.: 89628	

VILLAGE OF GERMANTOWN HILLS					
DESCRIPTION	MUTCD	SIZE	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ.FT)	AREA - TY 2 (SQ.FT)
RED OBJECT MARKER	OM4-1	18X18	3	6.75	
STOP	R1-1	30X30	88	550.00	
YIELD	R1-2	36X36X36	12	46.75	
ALL WAY PLAQUE	R1-3P	18X06	20	15.00	
SPEED LIMIT 20	R2-1	24X30	9	45.00	
SPEED LIMIT 25	R2-1	24X30	32	160.00	
SPEED LIMIT 30	R2-1	24X30	13	65.00	
SPEED LIMIT 35	R2-1	24X30	3	15.00	
SPEED LIMIT 40	R2-1	24X30	1	5.00	
DO NOT PASS	R4-1	24X30	3	15.00	
SCHOOL	S1-1	30X30	1	6.25	
SCHOOL SPEED LIMIT	S4-1100	24X48	1	8.00	
CURVE LEFT	W1-2L	30X30	2	12.50	
CURVE RIGHT	W1-2R	30X30	2	12.50	
STOP AHEAD SYMBOL	W3-1	30X30	3	18.75	
REDUCED SPEED LIMIT AHEAD 20	W3-5	36X36	1	9.00	
REDUCED SPEED LIMIT AHEAD 25	W3-5	36X36	1	9.00	
TRAFFIC FROM RIGHT DOES NOT STOP	W4-4aP	24X12	1	2.00	
TRAFFIC FROM LEFT DOES NOT STOP	W4-4aP	24X12	1	2.00	
ONCOMING TRAFFIC DOES NOT STOP	W4-4bP	24X12	1	2.00	
PEDESTRIAN	W11-2	30X30	2	12.50	
FIRETRUCK	W11-8	30X30	2	12.50	
ADVISORY SPEED (PLAQUE) 5 MPH	W13-1P	18X18	1	2.25	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	10	62.50	
NO OUTLET	W14-2	30X30	3	18.75	
PLAYGROUND SYMBOL	W15-1	30X30	1	6.25	
		TOTAL	218	1122.5	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			218
Z0051398	REMOVE EXISTING SIGN POST	EACH			0
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			5
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			201
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			12
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

VILLAGE OF GOODFIELD					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ.FT)	AREA - TY 2 (SQ.FT)
STOP	R1-1	30X30	21	131.25	
YIELD	R1-2	36X36X36	4	15.58	
SPEED LIMIT 20	R2-1	24X30	15	75.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	5	15.00	
SCHOOL SPEED ZONE AHEAD (SYMBOL)	S4-5	36X36	1	9.00	
SCHOOL SPEED LIMIT	S4-1100	24X48	3	24.00	
STOP AHEAD SYMBOL	W3-1	30X30	1	6.25	
RAILROAD AHEAD	W10-1	36 DIA	3	27.00	
CAUTION 60 FT BETWEEN TRACKS AND HIGHWAY	W10-1100	30X36	1	7.50	
NO OUTLET	W14-2	30X30	3	18.75	
TRUCK ENTRANCE	W16-1101	30X30	1	6.25	
		TOTAL	58	335.6	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			59
Z0051398	REMOVE EXISTING SIGN POST	EACH			0
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			3
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			3
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			52
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

VILLAGE OF KARPA					
DESCRIPTION	MUTCD	SIZE	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ.FT)	AREA - TY 2 (SQ.FT)
STOP	R1-1	30X30	13	81.25	
YIELD	R1-2	36X36X36	1	3.90	
SPEED LIMIT 20	R2-1	24X30	15	75.00	
ROAD CLOSED	R11-2	48X30	1		10.00
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	7	21.00	
DEAD END	W14-1	30X30	5	31.25	
PLAYGROUND SYMBOL	W15-1	30X30	1	6.25	
		TOTAL	43	218.6	10.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			43
Z0051398	REMOVE EXISTING SIGN POST	EACH			2
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	2	24
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			2
	ASSEMBLY FOR TELESCOPING POST,	EACH			13
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			0
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			30
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

DESIGNED	KK	REVISED	KK 01/30/2013
DRAWN	KK	REVISED	-
CHECKED	BWI	REVISED	-
DATE	10/19/12	REVISED	-

Woodford County
Highway Department

Municipal Schedule

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-50	Woodford	18	15
CONTRACT NO. 89628				

SCALE: SHEET NO. 15 OF 18 SHEETS STA. TO STA.

VILLAGE OF METAMORA					
DESCRIPTION	MUTCD	SIZE (IN)	QUANTITY	72000100	72000200
				AREA - TY 1 (SQ.FT)	AREA - TY 2 (SQ.FT)
STOP	R1-1	30X30	166	1037.50	
YIELD	R1-2	36X36X36	18	70.13	
ALL WAY (PLAQUE)	R1-3P	18X06	45	33.75	
SPEED LIMIT 20	R2-1	24X30	1	5.00	
SPEED LIMIT 30	R2-1	24X30	11	55.00	
DO NOT ENTER	R5-1	30X30	2	12.50	
WRONG WAY	R5-1A	36X24	1	6.00	
WEIGHT LIMIT 4 TONS	R12-1	24X30	2	10.00	
SCHOOL SPEED LIMIT	S4-1100	24X48	6	48.00	
END SCHOOL ZONE	S5-2	24X30	1	5.00	
CURVE RIGHT	W1-2R	30X30	1	6.25	
TWO DIRECTION LARGE ARROW	W1-7	48X24	3	24.00	
STOP AHEAD (SYMBOL)	W3-1	30X30	4	25.00	
REDUCED SPEED LIMIT AHEAD 30 MPH	W3-5	36X36	4	36.00	
TRAFFIC FROM RIGHT DOES NOT STOP	W4-4aP	24X12	2	4.00	
TRAFFIC FROM LEFT DOES NOT STOP	W4-4aP	24X12	2	4.00	
ONCOMING TRAFFIC DOES NOT STOP	W4-4bP	24X12	2	4.00	
BIKE SYMBOL (FYG)	W11-1	30X30	1	6.25	
DEAD END	W14-1	30X30	4	25.00	
DOWNWARD DIAGONAL ARROW LEFT (FYG)	W16-7P	24X12	1	2.00	
		TOTAL	277	1419.4	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	QUANTITY	QUANTITY
				277	
X7240195	REMOVE EXISTING SIGN PANEL	EACH			
Z0051398	REMOVE EXISTING SIGN POST	EACH			4
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	4	48
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			4
	ASSEMBLY FOR TELESCOPING POST ₁	EACH			252
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST ₁	EACH			4
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST ₁	EACH			24
X7350010	SIGN SUPPORT BRACKET	EACH			3

(FYG) = FLUORESCENT YELLOW GREEN BACKGROUND COLOR
 Note: FYG is only to be used in school zone areas.
 1. Incidental items. See special provisions.

CITY OF MINONK					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ.FT)	AREA - TY 2 (SQ.FT)
OBJECT MARKER TYPE 3, LEFT	OM3-L	12X36	1	3.00	
OBJECT MARKER TYPE 3, RIGHT	OM3-R	12X36	1	3.00	
STOP	R1-1	30X30	172	1075.00	
YIELD	R1-2	36X36X36	22	85.71	
ALL WAY (PLAQUE)	R1-3P	18X06	77	57.75	
SPEED LIMIT 20	R2-1	24X30	19	95.00	
SPEED LIMIT 25	R2-1	24X30	12	60.00	
SPEED LIMIT 30	R2-1	24X30	3	15.00	
SPEED LIMIT 35	R2-1	24X30	1	5.00	
CITYWIDE (PLAQUE)	R2-5aP	24X06	9	9.00	
UNLESS OTHERWISE POSTED (PLAQUE)	R2-5P	24X18	9	27.00	
NO U TURN	R3-4	24X24	5	20.00	
DO NOT ENTER	R5-1	30X30	2	12.50	
SCHOOL	S1-1	30X30	25	156.25	
SCHOOL SPEED LIMIT	S4-1100	24X48	13	104.00	
CURVE LEFT	W1-2L	30X30	1	6.25	
TWO DIRECTION LARGE ARROW	W1-7	48X24	3	24.00	
CROSS TRAFFIC DOES NOT STOP	W4-1100	30X18	4	15.00	
BUMP	W8-1	30X30	2	12.50	
FIRE TRUCK (SYMBOL)	W11-8	30X30	2	12.50	
ADVISORY SPEED (PLAQUE) 35 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	9	56.25	
		TOTAL	393	1857.0	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
					393
X7240195	REMOVE EXISTING SIGN PANEL	EACH			9
Z0051398	REMOVE EXISTING SIGN POST	EACH			9
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	9	108
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			9
	ASSEMBLY FOR TELESCOPING POST ₁	EACH			156
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST ₁	EACH			200
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST ₁	EACH			41
X7350010	SIGN SUPPORT BRACKET	EACH			2

1. Incidental items. See special provisions.

VILLAGE OF PANOLA					
DESCRIPTION	MUTCD	SIZE	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ.FT)	AREA - TY 2 (SQ.FT)
SPEED LIMIT 20	R2-1	18X24	1	3.00	
REVERSE CURVE LEFT	W1-4L	30X30	2	12.50	
		TOTAL	3	15.5	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
					3
X7240195	REMOVE EXISTING SIGN PANEL	EACH			0
Z0051398	REMOVE EXISTING SIGN POST	EACH			0
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST ₁	EACH			0
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST ₁	EACH			0
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST ₁	EACH			3
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - BHI	REVISED -
DATE - 12/19/12	REVISED -

Woodford County
Highway Department

Municipal Schedule

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-50	Woodford	18	16
CONTRACT NO. 89628				

SCALE: SHEET NO. 16 OF 18 SHEETS STA. TO STA.

VILLAGE OF ROANOKE					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
OBJECT MARKER	OM3-L	12X36	1	3.00	
OBJECT MARKER	OM3-R	12X36	2	6.00	
STOP	R1-1	30X30	60	375.00	
YIELD	R1-2	36X36X36	43	167.52	
ALL WAY (PLAQUE)	R1-3P	18X06	33	24.75	
SPEED LIMIT 15	R2-1	24X30	1	5.00	
SPEED LIMIT 25	R2-1	24X30	22	110.00	
NO RIGHT TURN	R3-1	24X24	1	4.00	
NO LEFT TURN	R3-2	24X24	1	4.00	
NO U TURN	R3-4	24X24	3	12.00	
DO NOT ENTER	R5-1	30X30	2	12.50	
NO TRUCKS (SYMBOL)	R5-2	24X24	2	8.00	
ONE WAY (LEFT)	R6-2L	18X24	1	3.00	
SCHOOL	S1-1	30X30	10	62.50	
SCHOOL PLAQUE	S4-3P	24X08	2	2.67	
SCHOOL SPEED LIMIT	S4-1100	24X48	7	56.00	
CURVE RIGHT	W1-2R	30X30	1	6.25	
ONE DIRECTION LARGE ARROW	W1-6	48X24	2	16.00	
TWO DIRECTION LARGE ARROW	W1-7	48X24	4	32.00	
STOP AHEAD SYMBOL	W3-1	30X30	2	12.50	
REDUCED SPEED LIMIT AHEAD 25	W3-5	36X36	1	9.00	
ADVISORY SPEED (PLAQUE) 15 MPH	W13-1P	18X18	1	2.25	
DEAD END	W14-1	30X30	5	31.25	
(ARROW) DEAD END	W14-1A	36X08	7	14.00	
DEAD END (ARROW)	W14-1A	36X08	7	14.00	
		TOTAL	221	993.2	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			221
Z0051398	REMOVE EXISTING SIGN POST	EACH			22
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	22	264
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			22
	ASSEMBLY FOR TELESCOPING POST,	EACH			35
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			175
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			17
X7350010	SIGN SUPPORT BRACKET	EACH			6

1. Incidental items. See special provisions.

VILLAGE OF SECOR					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	32	200.00	
YIELD	R1-2	36X36X36	21	81.81	
SPEED LIMIT 30	R2-1	24X30	16	80.00	
WEIGHT LIMIT 5 TONS / AXLE JAN 15 TO APRIL 15	R12-1104	18X24	2	6.00	
REVERSE CURVE LEFT	W1-4L	30X30	1	6.25	
TWO DIRECTION LARGE ARROW	W1-7	48X24	2	16.00	
STOP AHEAD (SYMBOL)	W3-1	30X30	1	6.25	
REDUCED SPEED LIMIT AHEAD 30 MPH	W3-5	36X36	2	18.00	
GRADE CROSSING ADVANCED WARNING	W10-1	36 DIA	4	36.00	
NO OUTLET	W14-2	30X30	1	6.25	
TRUCK ENTRANCE	W16-1101	30X30	1	6.25	
		TOTAL	83	462.8	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			87
Z0051398	REMOVE EXISTING SIGN POST	EACH			5
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	5	60
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			5
	ASSEMBLY FOR TELESCOPING POST,	EACH			5
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			23
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			59
X7350010	SIGN SUPPORT BRACKET	EACH			2

1. Incidental items. See special provisions.

VILLAGE OF SPRING BAY					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	53	331.25	
ALL WAY (PLAQUE)	R1-3P	18X24	3	9.00	
SPEED LIMIT 25	R2-1	24X30	10	50.00	
DEAD END	W14-1	30X30	5	31.25	
		TOTAL	71	421.5	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			71
Z0051398	REMOVE EXISTING SIGN POST	EACH			16
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	0	0
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			0
	ASSEMBLY FOR TELESCOPING POST,	EACH			0
72900100	METAL POST, TY A	FOOT	12	16	192
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			72
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			1
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

DESIGNED - KK	REVISED - KK 01/30/2013
DRAWN - KK	REVISED -
CHECKED - BNI	REVISED -
DATE - 10/18/12	REVISED -

Woodford County
Highway Department

Municipal Schedule

SCALE:	SHEET NO. 17 OF 18 SHEETS	STA. TO STA.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
				10-0006-00-SG	Woodford	18	17
						CONTRACT NO.: 89628	

VILLAGE OF WASHBURN					
DESCRIPTION	MUTCD	SIZE (IN)	NO. OF PIECES	72000100	72000200
				AREA - TY 1 (SQ. FT)	AREA - TY 2 (SQ. FT)
STOP	R1-1	30X30	72	450.00	
YIELD	R1-2	36X36X36	4	15.58	
ALL WAY (PLAQUE)	R1-3P	18X06	31	23.25	
SPEED LIMIT 5	R2-1	24X30	2	10.00	
SPEED LIMIT 25	R2-1	24X30	14	70.00	
WEIGHT LIMIT 5 TONS	R12-1	24X30	2	10.00	
SCHOOL	S1-1	30X30	2	12.50	
SCHOOL SPEED LIMIT	S4-1100	24X48	3	24.00	
DEAD END	W14-1	30X30	3	18.75	
		TOTAL	133	634.1	0.0

PAY ITEM NUMBER	DESCRIPTION	UNIT	SIZE (FT)	NO. OF PIECES	QUANTITY
X7240195	REMOVE EXISTING SIGN PANEL	EACH			133
Z0051398	REMOVE EXISTING SIGN POST	EACH			10
72800100	2"X2" TELESCOPING STEEL SIGN SUPPORT	FOOT	12	10	120
73100100	2.25"X2.25" TELESCOPING STEEL SIGN BASE	EACH			10
	ASSEMBLY FOR TELESCOPING POST,	EACH			12
72900100	METAL POST, TY A	FOOT	12	0	0
72900200	METAL POST, TY B	FOOT	12	0	0
	ASSEMBLY FOR METAL POST,	EACH			118
X7300105	WOOD SUPPORT, 4' X 4'	FOOT	12	0	0
X7300105	WOOD SUPPORT, 4' X 6'	FOOT	12	0	0
	ASSEMBLY FOR WOOD POST,	EACH			3
X7350010	SIGN SUPPORT BRACKET	EACH			0

1. Incidental items. See special provisions.

DESIGNED	KK	REVISED	KK 01/30/2013
DRAWN	KK	REVISED	
CHECKED	BWI	REVISED	
DATE	10/18/12	REVISED	

Woodford County
Highway Department

Municipal Schedule

SCALE: SHEET NO. 18 OF 18 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	10-00016-00-SG	Woodford	18	18
CONTRACT NO.: 89628				