PLAN

DATE	BY	
		SURVEYED
		PLOTTED
		ALIGNMENT CHECKED
		GRADES CHECKED
		CADD FILE NAME

NOTE BOOK
NO.

PROFILE

DATE	BY	
		SURVEYED
		PLOTTED
		GRADES CHECKED
		STRUCTURE (KEYING CSYKD

NOTE BOOK
NO.

TOREY MAGNUS

SW¼, SW¼, SEC 14, T. 5 N., R. 2 E., 3RD P.M.

STA. 373+30
PIPE CULVERTS, CL. A, TY. 1, 30"
LENGTH = 42 FT.
P.R.C.F.E.S. 30" = 2 EACH
U.S.F.L. 558.8 STA. 373+30 26' LT.
D.S.F.L. 558.6 STA. 373+30 28' RT.
TRENCH BACKFILL = 7.9 CU. YDS.
CLASS D PATCHES = 22.2 SQ. YDS.
PIPE CULVERT REMOVAL = 48 FT.

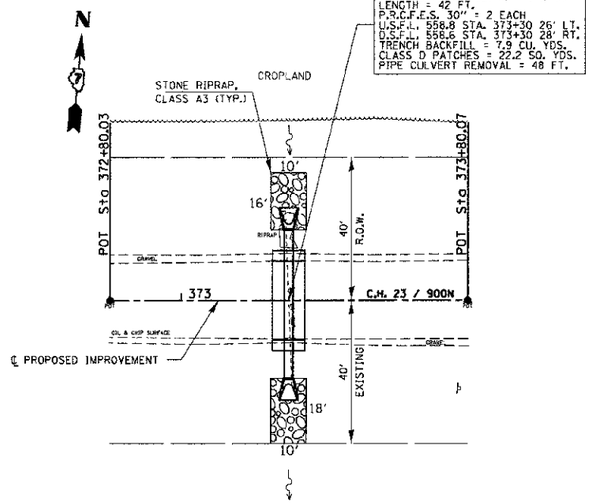

TOREY MAGNUS

SW¼, SW¼, SEC 14, T. 5 N., R. 2 E., 3RD P.M.

STA. 382+00
PIPE CULVERTS, CL. A, TY. 1, 36"
LENGTH = 58 FT.
P.R.C.F.E.S. 36" = 2 EACH
U.S.F.L. 552.5 STA. 381+77 28' LT.
D.S.F.L. 551.8 STA. 382+23 28' RT.
TRENCH BACKFILL = 13.0 CU. YDS.
CLASS D PATCHES = 30.8 SQ. YDS.
PIPE CULVERT REMOVAL = 79 FT.

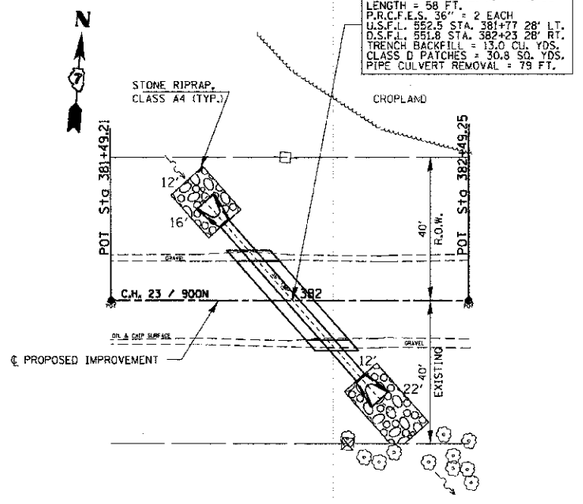

TOREY MAGNUS

SW¼, SW¼, SEC 14, T. 5 N., R. 2 E., 3RD P.M.

STA. 384+20
PIPE CULVERTS, CL. A, TY. 2, 24"
LENGTH = 60 FT.
P.R.C.F.E.S. 24" = 2 EACH
U.S.F.L. 549.5 STA. 384+23 34' LT.
D.S.F.L. 549.3 STA. 384+17 37' RT.
TRENCH BACKFILL = 19.6 CU. YDS.
CLASS D PATCHES = 24.6 SQ. YDS.
PIPE CULVERT REMOVAL = 69 FT.

STA. 384+91
PIPE CULVERTS, CL. A, TY. 1, 24"
LENGTH = 50 FT.
P.R.C.F.E.S. 24" = 2 EACH
U.S.F.L. 551.4 STA. 384+94 27' LT.
D.S.F.L. 550.5 STA. 384+88 34' RT.
TRENCH BACKFILL = 10.3 CU. YDS.
CLASS D PATCHES = 23.9 SQ. YDS.
PIPE CULVERT REMOVAL = 56 FT.

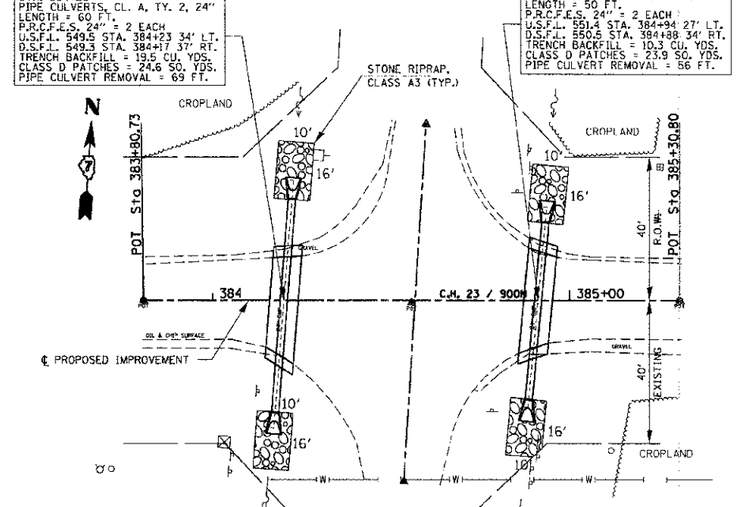

W. SUMMANN

N½, NW¼, NW¼, SEC 23, T. 5 N., R. 2 E., 3RD P.M.

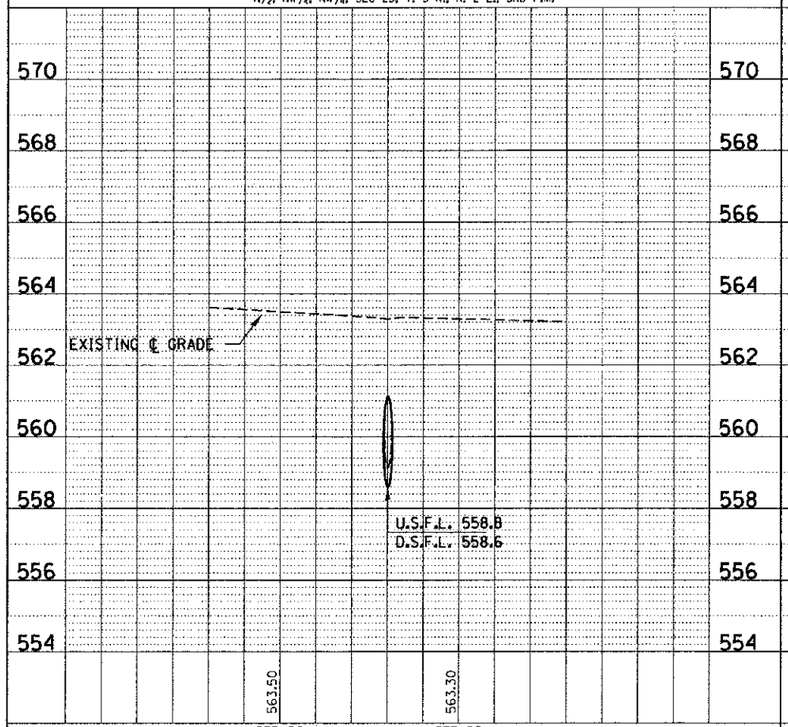

W. SUMMANN

N½, NW¼, NW¼, SEC 23, T. 5 N., R. 2 E., 3RD P.M.

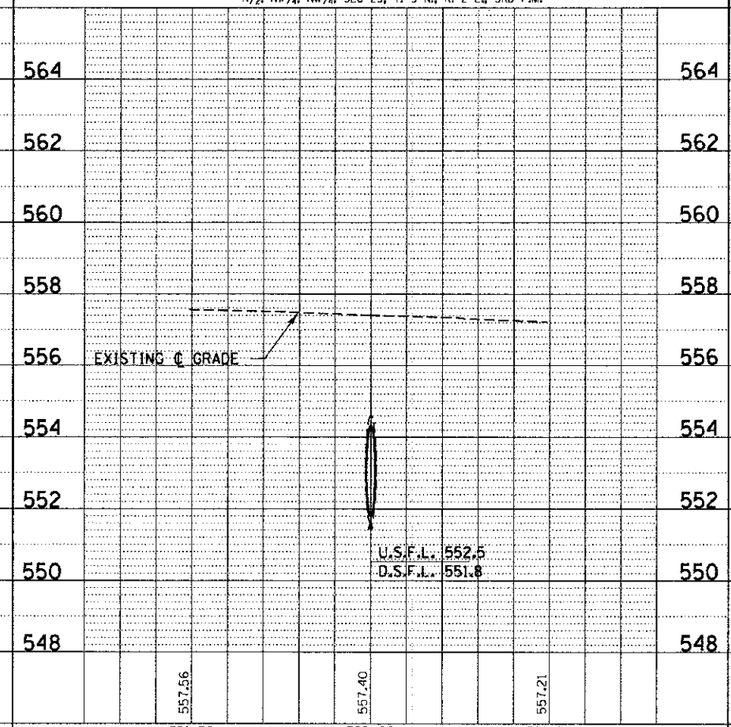

W. SUMMANN

N½, NW¼, NW¼, SEC 23, T. 5 N., R. 2 E., 3RD P.M.

MARCELLA ALBRECHT

NE¼, NW¼, SEC 23, T. 5 N., R. 2 E., 3RD P.M.

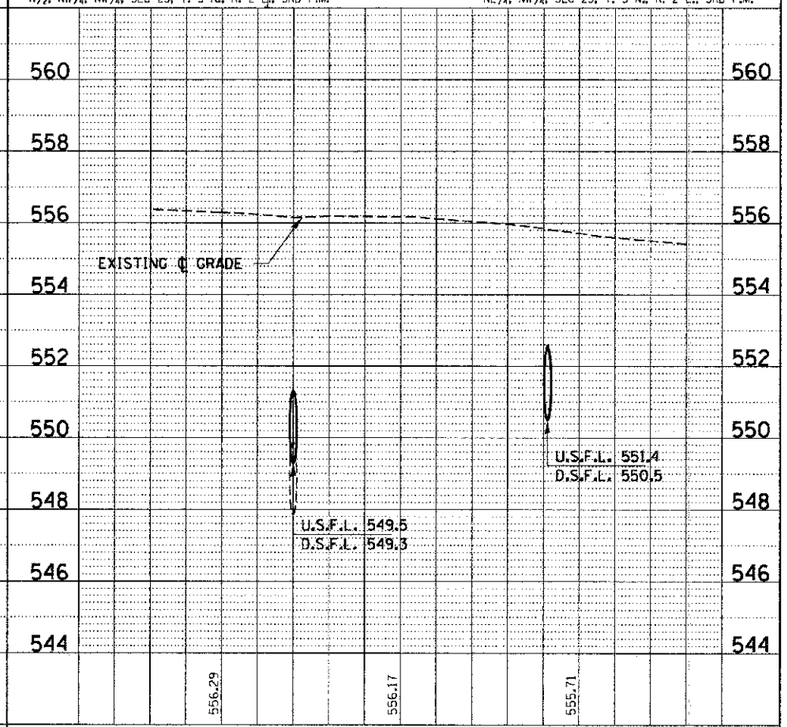

FILE NAME = 110204-alt-pp85.dgn	USER NAME =	DESIGNED - J.W.F.	REVISED -
HAMPTON, LENZINI AND RENWICK, INC. 2001 STEVENSON DRIVE, SUITE 201 SPRINGFIELD, ILLINOIS 62703 ILLINOIS PROFESSIONAL DESIGN FIRM 217/787-3500 184.000959		DRAWN - D.T.M.	REVISED -
	PLOT SCALE =	CHECKED - M.C.B.	REVISED -
	PLOT DATE = 1/28/2013	DATE - 01/28/13	REVISED -

STATE OF ILLINOIS
FAYETTE COUNTY HIGHWAY DEPARTMENT

PLAN & PROFILE
F.A.S. 717 / C.H. 23 / 900N

SCALE: H20:V5 | SHEET NO. 6 OF 14 SHEETS | STA. | TO STA.

C.H.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
23	09-00120-00-DR	FAYETTE	76	14
		CONTRACT NO. 95702		
		ILLINOIS FED. AID PROJECT		