

GENERAL LANDSCAPE NOTES


THE LOCATION OF ALL PLANT MATERIAL SHALL BE STAKED BY THE CONTRACTOR FOR APPROVAL BY THE ENGINEER IN FIELD PRIOR TO INSTALLATION OF ANY PLANT MATERIAL. INDIVIDUAL TREES SHALL BE STAKED WITH IDENTITIES WRITTEN ON STAKES. SHRUB AND PERENNIAL BEDS SHALL BE OUTLINED WITH STAKES AND PAINTED LINES.

SCHEDULE OF PLANT MATERIAL


	SCIENTIFIC NAME	COMMON NAME	MEASURED SIZE	SPACING	UNIT	QUANTITY
TREES	GLEDITSIA TRIACANTHOS INERMIS 'SHADEMASTER'	SHADEMASTER THORNLESS COMMON HONEYLOCUST	3" CALIPER	AS SHOWN	EACH	4
SHRUBS	ARONIA MELANOCARPA 'MORTON'	IROQUOIS BEAUTY BLACK CHOKEBERRY	2.5' HEIGHT	3' C/C	EACH	36
	BERBERIS THUNBERGII 'BAILONE'	RUBY CAROUSEL BARBERRY	2' HEIGHT	2' C/C	EACH	73
	RHUS AROMATICA 'GRO-LOW'	GRO-LOW FRAGRANT SUMAC	18" HEIGHT	3' C/C	EACH	18
GRASSES	PANICUM VIRGATUM 'HEAVY METAL'	HEAVY METAL SWITCH GRASS	1 GALLON	2' C/C	EACH	22
	SCHIZACHYRUM SCOPARIUM	LITTLE BLUESTEM	1 GALLON	2' C/C	EACH	44
	SPOROBULUS HETEROLEPIS	PRAIRIE DROPSEED	1 GALLON	2.5' C/C	EACH	51
PERENNIALS	HEMEROCALLIS 'HAPPY RETURNS'	HAPPY RETURNS DAYLILY	1 GALLON	1.25' C/C	EACH	73
	SEDUM 'AUTUMN JOY'	AUTUMN JOY SEDUM	1 GALLON	1.5' C/C	EACH	57

NOTE: ALL TREES AND SHRUBS SHALL BE BALLED AND BURLAPPED.


3" SHREDDED BARK MULCH SY 255

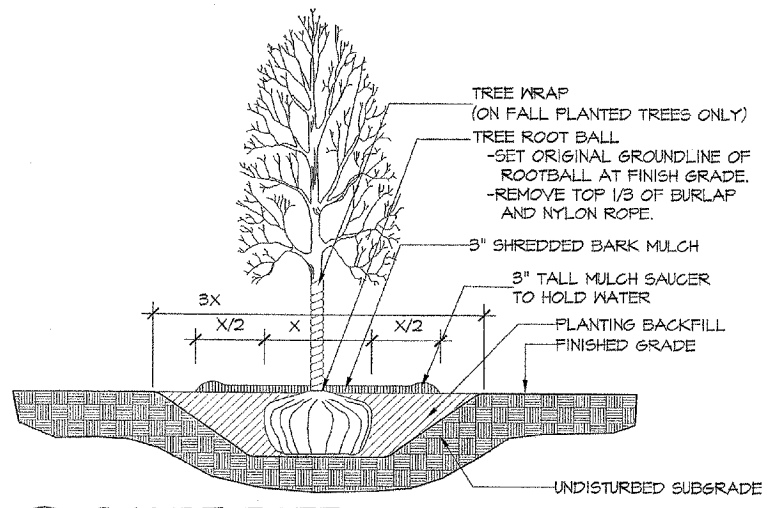

1 SHADE TREE PLANTING DETAIL
No Scale

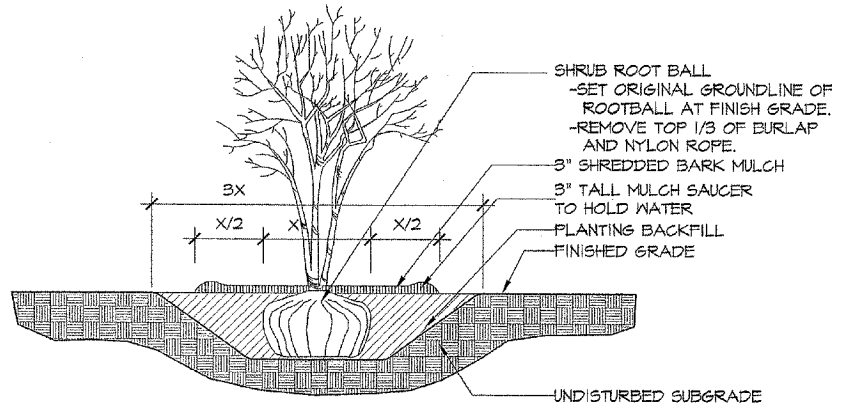

2 SHRUB PLANTING DETAIL
No Scale

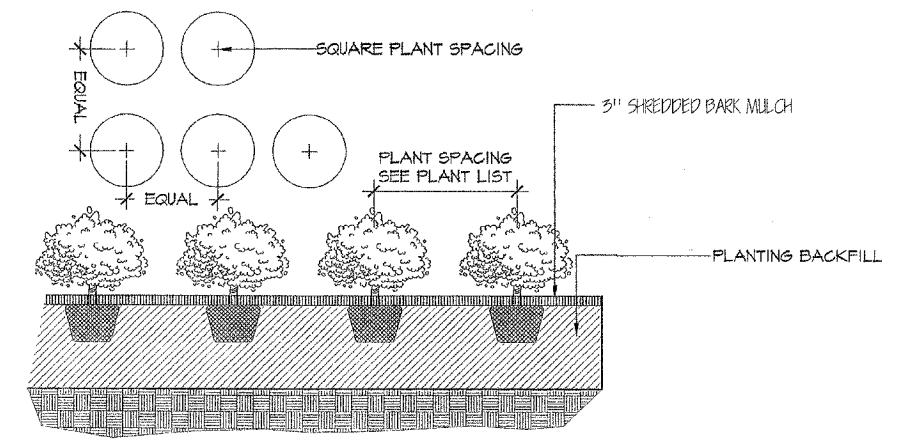

3 PERENNIAL / GROUND COVER PLANTING DETAIL
No Scale

LANDSCAPED MEDIAN GRADING TYPICAL SECTION

