

**GENERAL NOTES**

ABANDONED UNDERGROUND UTILITIES THAT CONFLICT WITH CONSTRUCTION SHALL BE DISPOSED OF OUTSIDE THE LIMITS OF THE RIGHT OF WAY ACCORDING TO ARTICLE 202.03 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER. THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE COST OF EARTH EXCAVATION.

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

MEMBERS OF JULIE KNOWN TO BE WITHIN THE LIMITS OF THE IMPROVEMENT ARE:


THE CONTRACTOR SHALL CONTACT JULIE AT LEAST 48 HOURS PRIOR TO EXCAVATION TO DETERMINE WHICH UTILITIES ARE IN THE AREA.

UTILITY CONFLICTS ARE NOT ANTICIPATED.

**COMMITMENTS**

1. ANY SURPLUS EXCAVATED EARTH MATERIAL REMAINING AFTER THE COMPLETION OF WORK SHALL REMAIN WITHIN THE PROJECT LIMITS.
2. STEEL RAILING TO BE REMOVED WILL BE SALVAGED AND BECOME PROPERTY OF THE STATE.

**PROJECT LOCATION  
IL 23 NORTHBOUND  
BETWEEN BLUFF STREET AND  
FIRST STREET IN STREATOR**

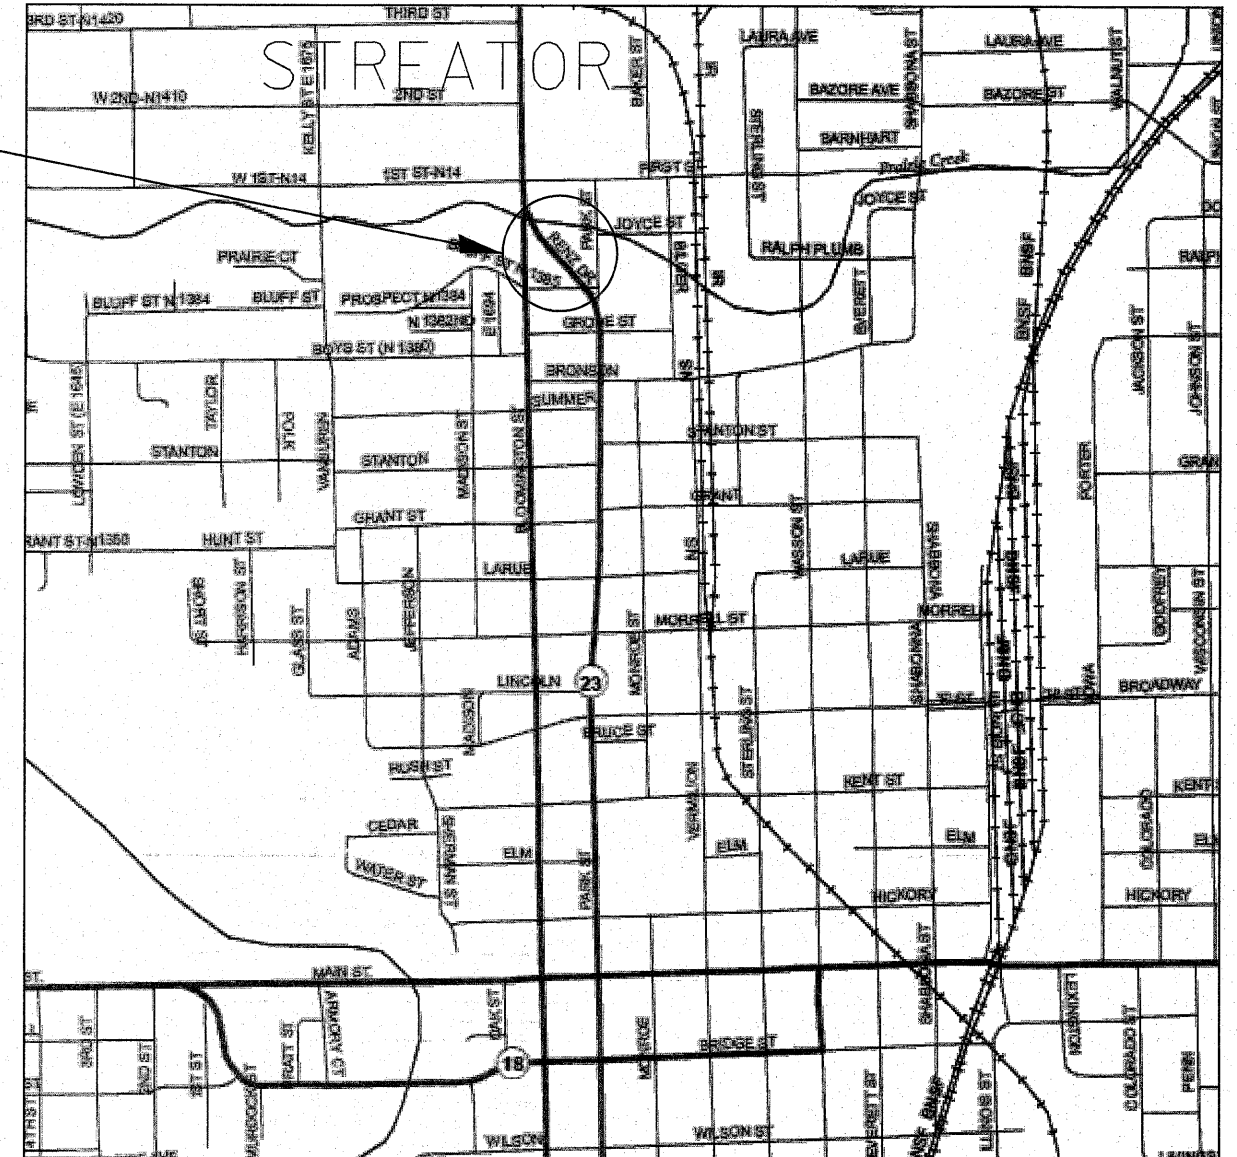

**SUMMARY OF QUANTITIES**

URBAN  
100% STATE  
ROADWAY  
0021  
SAFETY

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	URBAN 100% STATE ROADWAY 0021 SAFETY
50300225	CONCRETE STRUCTURES	CU YD	0.64	0.64
50800205	REINFORCEMENT BAR, EPOXY COATED	POUND	127	127
63000001	STEEL PLATE BEAM GUARD RAIL, TYPE A, 6 FOOT POSTS	FOOT	72	72
63100085	TRAFFIC BARRIER TERMINAL, TYPE 6	EACH	1	1
63100167	TRAFFIC BARRIER TERMINAL, TYPE 1 (SPECIAL) TANGENT	EACH	1	1
67100100	MOBILIZATION	L SUM	1	1
70102630	TRAFFIC CONTROL AND PROTECTION, STANDARD 701601	L SUM	1	1
78200410	GUARDRAIL MARKERS, TYPE A	EACH	13	13
78201000	TERMINAL MARKER-DIRECT APPLIED	EACH	1	1
X0326519	STEEL RAILING REMOVAL	FOOT	146	146
Z0042300	PORTLAND CEMENT CONCRETE SIDEWALK CURB	FOOT	10	10

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DISTRICT THREE

PREPARED BY: *David Bonic*  
DISTRICT STUDIES & PLANS ENGINEER

DATE: 2-8-12

EXAMINED BY: *Albert Lopez*  
DISTRICT CONSTRUCTION ENGINEER

*Wayne Phillips*  
DISTRICT MATERIALS ENGINEER

*James A. Winkler*  
DISTRICT OPERATIONS ENGINEER