
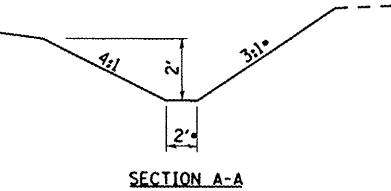


PT	STATION	OFFSET	SIDE	ELEVATION	NORTHING	EASTING
1	510+10.86	63.32	LT	690.00	1377591.50	2137309.05
2	511+32.65	111.31	LT	688.00	1377700.88	2137382.00
3	511+32.87	67.12	LT	688.00	1377664.63	2137407.27
4	511+63.35	140.38	LT	690.00	1377742.74	2137391.69
5	512+09.98	108.50	LT	673.00	1377746.77	2137452.87
6	512+13.95	249.34	LT	689.00	1377862.76	2137375.10
7	512+78.97	138.92	LT	655.00	1377807.26	2137492.35
8	512+82.86	91.37	RT	664.62	1377615.20	2137619.48
9	512+97.16	169.09	LT	653.39	1377842.85	2137492.10
10	512+99.72	315.03	RT	650.00	1377967.69	2137416.46
11	513+07.49	142.30	LT	690.00	1377584.95	2137666.93
12	513+15.33	211.58	LT	651.82	1377888.94	2137485.57
13	513+38.74	76.97	RT	663.00	1377787.44	2137577.24
14	513+96.38	238.51	LT	690.00	1377956.55	2137544.43
15	514+06.29	93.63	LT	665.95	1377676.55	2137723.37
16	514+11.92	144.47	LT	690.00	1377884.11	2137606.56
17	514+76.81	99.83	LT	665.00	1377879.19	2137686.77
18	515+31.31	293.52	LT	690.00	1378075.97	2137641.42
19	515+60.03	145.50	LT	655.52	1377960.88	2137739.30
20	516+25.80	50.82	LT	690.00	1377909.20	2137843.35
21	516+25.80	125.76	LT	665.00	1377975.55	2137808.50
22	516+25.80	205.82	LT	655.00	1378046.43	2137771.28
23	516+25.80	285.82	LT	651.00	1378117.16	2137733.90
24	516+30.15	325.43	LT	646.45	1378154.50	2137719.83
25	516+39.68	426.14	LT	624.00	1378248.59	2137682.42
26	516+84.42	185.96	LT	653.00	1378056.95	2137834.97
RUNAROUND DITCH						
27	508+81.48	104.29	RT	689.50	1377380.00	2137298.94
28	513+85.13	224.93	RT	686.50	1377553.46	2137773.40
29	517+00.76	167.17	RT	685.02	1377749.06	2138008.67
30	518+54.54	121.23	RT	682.58	1377854.56	2138122.65
31	520+85.61	61.93	RT	685.84	1377997.06	2138307.67

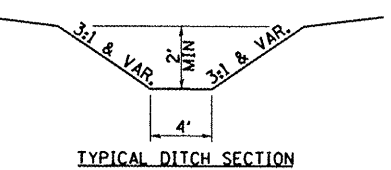

NOTE: DITCH BOTTOM & BACKSLOPE OF RT RUNAROUND DITCH TO REMAIN IN PLACE FOLLOWING RUNAROUND PAVEMENT REMOVAL