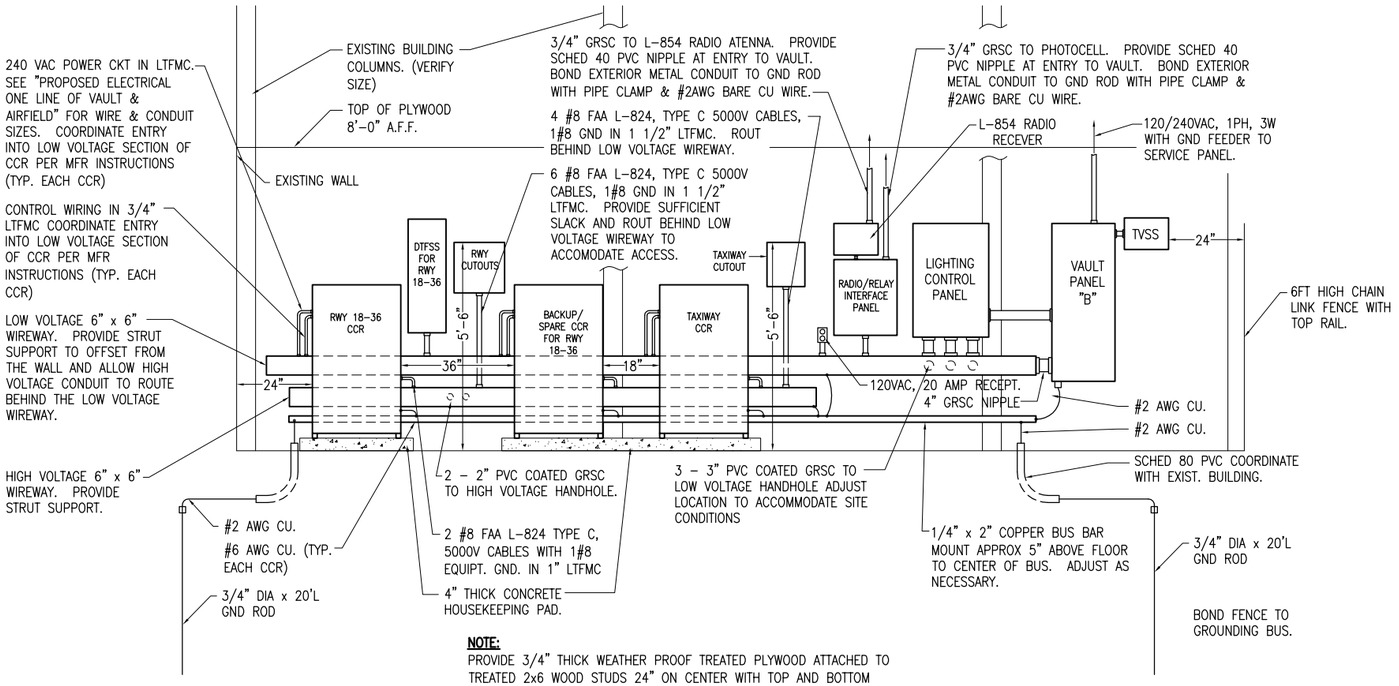

NOTE:
PROVIDE 3/4" THICK WEATHER PROOF TREATED PLYWOOD ATTACHED TO TREATED 2x6 WOOD STUDS 24" ON CENTER WITH TOP AND BOTTOM PLATE. FASTEN TO FLOOR SLAB WITH EXPANSION ANCHORS. TOP PLATE TO BE 8'-0" ABOVE FINISH FLOOR. PAINT ALL EXPOSED WOOD WITH 2 COATS OF WHITE OR GRAY ENAMEL PAINT.

COORDINATE EQUIPMENT LAYOUT AND MOUNTING WITH EXISTING BUILDING CONSTRUCTION AND BUILDING COLUMNS.

VAULT NORTHWEST WALL ELEVATION

SCALE 1/2"=1'-0"

1 0 2 4 FEET

REVISION | DATE

SHELBY COUNTY AIRPORT
SHELBYVILLE, ILLINOIS

A.I.P. PROJ.: 3-17-0093-B11

IL PROJ.: 2H0-4149

LAYOUT	KNL	12/28/11
DRAWN	CWS	01/19/12
REVIEWED	CAH/KNL	02/23/12

Hanson Proj. No. 10A0047
Filename F-201.DWG
Scale 1/2"=1'-0"
Date 02/18/12

HANSON
©Copyright Hanson Professional Services Inc. 2012
Hanson Professional Services Inc.
152S South Sixth Street
Springfield, Illinois 62703-2886
Ph: (217) 788-2450 Fax: (217) 788-2503
www.hanson-inc.com
Offices Nationwide

CONSTRUCT VAULT, LIGHT TAXIWAY & INSTALL NAVAIDS

PROPOSED AIRPORT
VAULT
WALL ELEVATIONS

MAR 09, 2012 1:58 PM KINCA00394
P:\10JOBS\10A0047\10A0047D\CAD\AIRPORT\SHEET\F-201.DWG