DESIGNED CGM

CHECKED EMM

DRAWN COM

CHECKED EMM

BSD-1

EXAMINED

PASSED

10-22-04


### DEPARTMENT OF TRANSPORTATION -The diameter of this part is equal or larger than the The diameter of this part [1][1][1] - Stage Construction Line diameter of bar spliced. is the same as the diameter

# ROLLED THREAD DOWEL BAR \*\* ONE PIECE - Wire Connector Viritiiii WELDED SECTIONS

of the bar spliced.

## BAR SPLICER ASSEMBLY ALTERNATIVES


\*\* Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

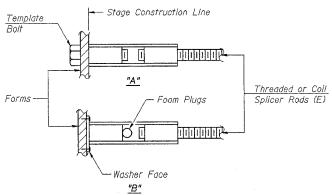

STATE OF ILLINOIS

# INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt. "B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E): Indicates epoxy coating.

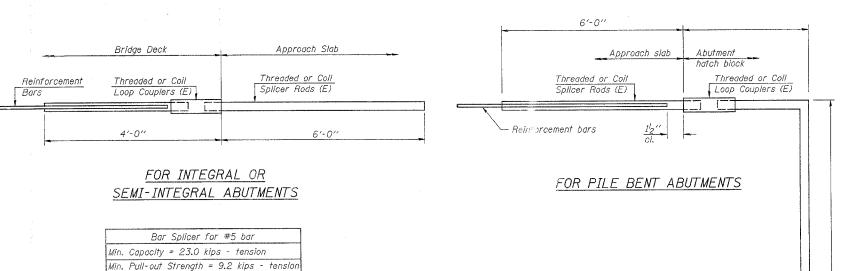

No. Required =	
	Bar Splicer for #5 bar
	Min. Capacity = 23.0 kips - tension
- 200	Min. Pull-out Strength = 9.2 kips -
	No. Required = 74
ENGINEER OF BRIDGE DESIGN	<u> </u>

SHEET NO. SHEET NO. 12 TOTAL SHEETS 78 (JOBR-3)D & JIBR-8 JO DAVIESS 45 39 12 SHEETS FED. ROAD DIST. NO. 7 BLLINDIS FED. AID PR

Contract # 64B27

#### NOTES

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.

Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and fied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.

Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:

- Minimum Capacity = 1.25 x fy x  $A_t$ 1
- (Tension II) Kips, Minimum \*Pull-out Strength = 1.25 x  $fs_{allow}$  x  $A_t$


Where fy = Yield strength of lapped reinforcement bars in ksi.

fs<sub>allow</sub>= Allowable tensile stress in lapped reinforcement bars in ksi (Service Load)

 $A_t$  = Tensile stress area of lapped reinforcement bars. \* = 28 day concrete

BAR SPLICER ASSEMBLIES				
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length	Strength Requirements		
			Min. Pull-Out Strength kips - tension	
#4	1'-8''	14.7	5.9	
#5	2'-0''	23.0	9.2	
#6	2'-7"	33.1	13.3	
#7	3′~5′′	45.1	18.0	
#8	4'-6''	58.9	23.6	
#9	5′-9″	75.0	30.0	
#10	7′-3′′	95.0	38.0	
#11	9'-0''	117.4	46.8	

Bar splicer assemblies shall be according to Section 508 of the Standard Specifications, except as noted. The furnishing and installation of bar splicer assemblies will be measured and paid for at the contract unit price each for "BAR SPLICERS."

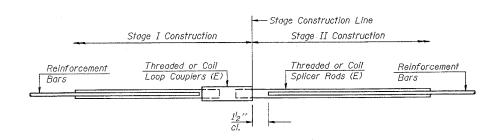

#### STANDARD

Bar Size	No. Assemblies Required	Location
#4	108	Deck
#5	3	Deck Bm. Block out
#5	6	South Abutment
#5	6	North Abutment

### BAR SPLICER ASSEMBLY DETAILS

IL. RTE. 78 OVER DAVIS CREEK F.A. 642 SECTION (10BR-3)D & 11BR-8 JO DAVIESS COUNTY STA. 20+75.37 STRUCTURE NUMBER 043-0042

DATE : 12-21-05