
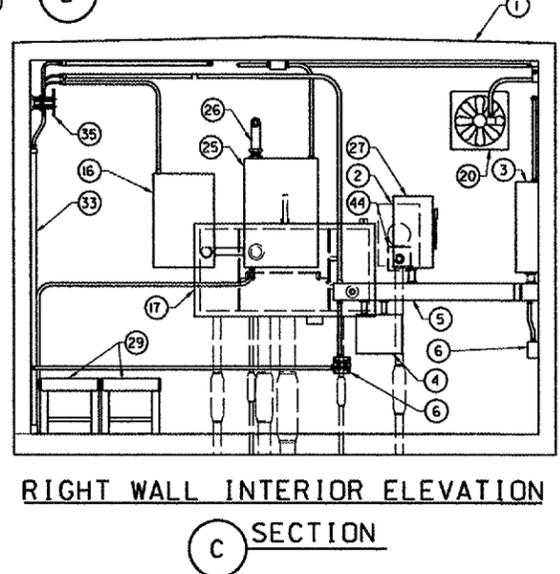
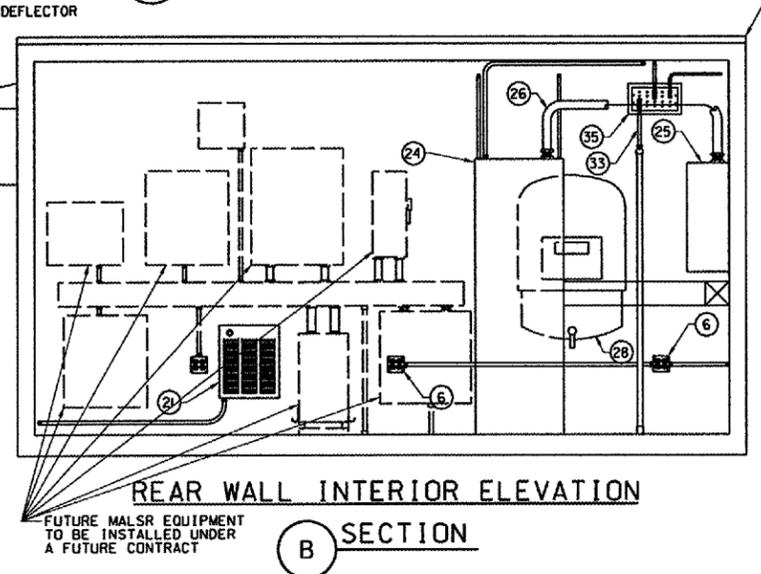
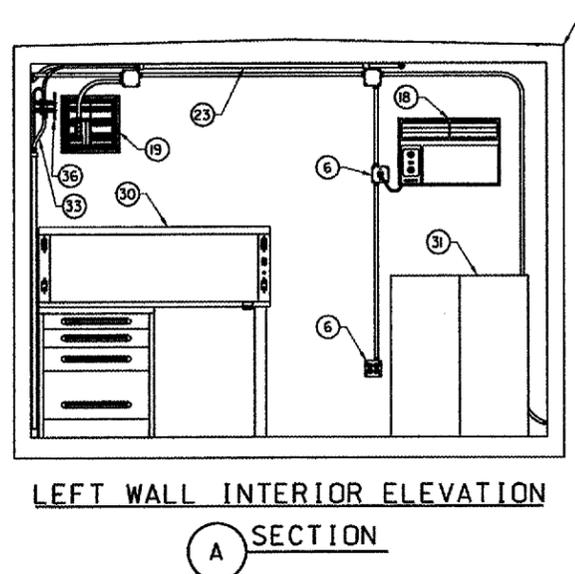

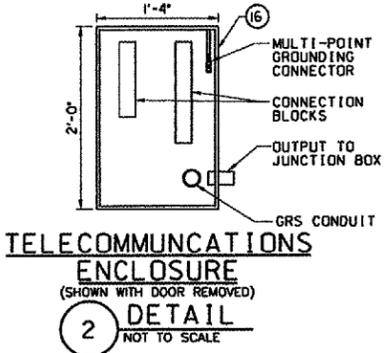


120/240V, SINGLE PHASE, 100 AMP, MAIN LUGS, SURFACE-MOUNTED

DESCRIPTION	C/B	#	LOAD	#	C/B	DESCRIPTION
LIGHTS	20	1	550	1265	2	15
SPARE	20	3	360	1265	4	2
RECEPTACLES	20	5	720	720	6	20
LOCALIZER EQUIP.	20	7		360	8	20
DME EQUIPMENT	20	9		10	20	20
SPACE		11		180	12	20
WALL HEATER	20	13	1500		14	20
SPACE		15		1500	16	20
SPACE		17			18	20
SPACE		19			20	20
PHASE LOAD			5115	3305		
TOTAL LOAD			8420W / 240 V = 35.08 AMPS			

DISTRIBUTION PANEL LOAD SCHEDULE

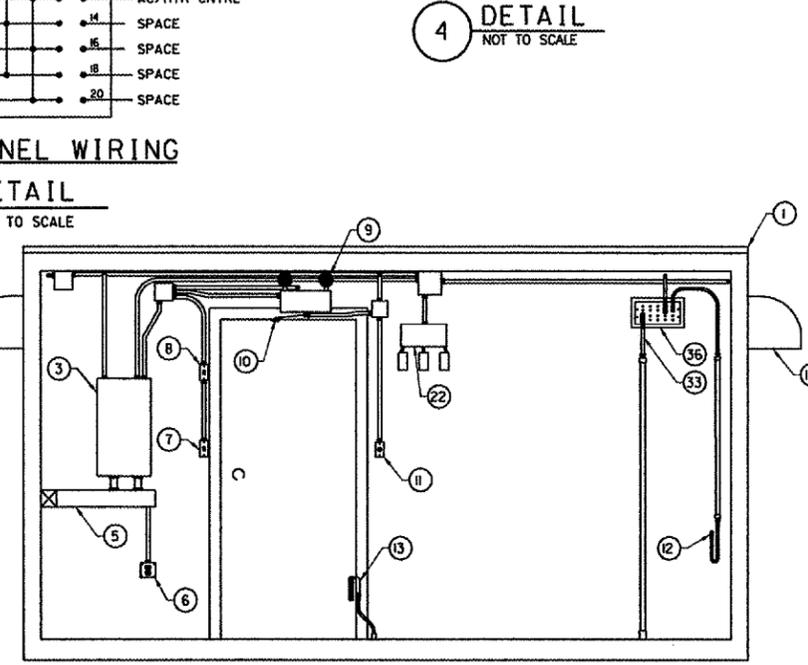

- NUMBERED LEGEND:**
- I = CONTRACTOR SHALL INSTALL ITEM, F&I = CONTRACTOR SHALL FURNISH & INSTALL ITEM.
BO = SHALL BE INSTALLED BY FAA INSTALLATION PERSONNEL OR IS ALREADY INSTALLED IN PRE-FABRICATED EQUIPMENT SHELTER
- 1 ① WOOD FRAME EQUIPMENT SHELTER W/FIBERGLASS EXTERIOR FINISH PER DWG ARR-D-LOC33-A01
- F&I ② METER BASE FOR USE WITH UNDERGROUND SERVICE PER POWER COMPANY'S SPECIFICATIONS SHALL BE INSTALLED OVER WALL PENETRATION (INSTALLED BY SHELTER MANUFACTURER), INSTALL 3-1/2" TYPE THWN POWER CABLES AND #6 GREEN THWN GROUND CONDUCTOR TO SECONDARY LEADS OF METER BASE AND PRIMARY LEADS OF SERVICE ENTRANCE DISCONNECT SWITCH TO INSTALL 3-1/2" TYPE U.S.E. POWER CABLES AND #2 GREEN TYPE U.S.E. GROUND CONDUCTOR IN 2" GALVANIZED RIGID STEEL CONDUIT, 2" BELOW GRADE (MINI FROM TRANSFORMER'S SECONDARY, CONNECTIONS AT TRANSFORMER WILL BE MADE BY COMED REPRESENTATIVES, CONTACT KATIE OLIVA AT (847) 608-2538 WHEN READY.
- BO ③ 100A BREAKER PANEL, 20 CIRCUITS, W/BOLT ON BREAKERS
- BO ④ AC SURGE ARRESTOR, 120/240V
- BO ⑤ 4" SQUARE DUCT
- BO ⑥ ELECTRICAL RECEPTACLE
- BO ⑦ INTERIOR LIGHT SWITCH
- BO ⑧ EXTERIOR LIGHT SWITCH
- BO ⑨ EMERGENCY LIGHT
- BO ⑩ INTRUSION SENSOR
- BO ⑪ SMOKE DETECTOR RESET SWITCH
- BO ⑫ WORKSTATION GROUND
- BO ⑬ GROUNDING STRAP
- BO ⑭ WALL-MOUNTED EXTERIOR LIGHT WITH PHOTO CONTROL
- BO ⑮ 4'-LONG 2-LAMP-TUBE FLUORESCENT LIGHT FIXTURE, 120-VOLT
- BO ⑯ TELECOMMUNICATIONS ENCLOSURE PER DETAIL "2"
- BO ⑰ POWER, CONTROL AND RF INTERFACE JUNCTION BOX
- BO ⑱ A/C THRU-WALL UNIT, 12,000 BTU,
- BO ⑲ 12" SQUARE MOTORIZED LOUVER WITH FILTER AND HOOD
- BO ⑳ EXHAUST FAN WITH VENT HOOD
- BO ㉑ WALL-MOUNTED ELECTRIC HEATER
- BO ㉒ ENVIRONMENTAL CONTROL PANEL
- BO ㉓ 1" PVC CONDUIT CARRYING #4/0 GREEN THWN W/ORANGE STRIPE FROM MAIN GROUNDING PLATE TO MULTIPPOINT GROUNDING PLATE.
- BO ㉔ LOCALIZER ELECTRONIC EQUIPMENT RACK
- BO ㉕ LOCALIZER EQUIPMENT JUNCTION BOX
- BO ㉖ 2" EMT CONDUIT CARRYING SIGNAL CABLES.
- BO ㉗ MAIN DISCONNECT, 100A, 240V, W/FUSES
- BO ㉘ EYE WASH STATION
- BO ㉙ FLOOR-MOUNTED BATTERY BOXES
- BO ㉚ WORK BENCH/DESK
- BO ㉛ DRAWER STORAGE UNIT
- BO ㉜ SMOKE DETECTOR ON CEILING
- F&I ㉝ TWO 4/0 AWG THWN GROUNDING CONDUCTORS FROM MAIN AND FROM MULTI-POINT GROUNDING PLATES TO COUNTERPOISE
- F&I ㉞ #2/0 GROUNDING CONDUCTOR, GREEN THWN WITH RED STRIPE IN 1" GRS CONDUIT. LEAVE 5' LENGTH OF CONDUCTOR IN POWER, CONTROL AND RF INTERFACE JUNCTION BOX FOR TERMINATION BY FAA INSTALLATION PERSONNEL.
- BO ㉟ MAIN COPPER GROUNDING PLATE WITH PLASTIC COVER
- BO ㊱ MULTIPOINT COPPER GROUNDING PLATE WITH PLASTIC COVER
- F&I ㊲ 3/4" X 10' COPPERCLAD GROUNDING ROD
- F&I ㊳ #6 BARE COPPER GROUNDING AND BONDING CONDUCTOR
- F&I ㊴ #4/0 BARE COPPER COUNTERPOISE 2'-6" BELOW GRADE. SEE NOTE 3.
- F&I ㊵ 2" GRS WITH EXPANSION COUPLING FOR COMMUNICATIONS CABLES. TERMINATE CONDUIT 5' BEYOND COUNTERPOISE AND CAP END, MARK LOCATION OF DUCT END WITH CABLE MARKER
- F&I ㊶ 1" GRS WITH EXPANSION COUPLING FOR LOCALIZER ANTENNA POWER CONDUCTORS
- F&I ㊷ 3 1/2" GRS WITH EXPANSION COUPLING CONTINUOUS TO DME ANTENNA
- F&I ㊸ 4" GRS WITH EXPANSION COUPLING FOR LOCALIZER ANTENNA SIGNAL AND COMMUNICATION CABLES
- BO ㊹ BUILDING WALL PENETRATION TO OUTSIDE FROM SERVICE ENTRANCE DISCONNECT SWITCH

- NOTES:**
- ELECTRICAL EQUIPMENT SHOWN ON THIS SHEET IS SURFACE MOUNTED BY FAA REPRESENTATIVES PRIOR TO SHIPMENT OF SHELTER UNLESS OTHERWISE NOTED.
 - CONTRACTOR SHALL NOTIFY RESIDENT ENGINEER IF SHELTER IS DAMAGED OR MISSING ITEMS WHEN SHIPMENT ARRIVES.
 - ALL GROUNDING CONDUCTORS AND COUNTERPOISE SHALL BE ATTACHED TO GROUNDING RODS USING EXOTHERMIC WELDS PER SPECIFICATIONS. SHEET 57 OF 66

DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
GREAT LAKES REGION CHICAGO, ILLINOIS

LOCALIZER
FLOOR PLAN AND INTERIOR ELEVATIONS
12' X 16' PRE-FABRICATED EQUIPMENT SHELTER

AURORA AURORA MUNICIPAL AIRPORT IL

REVIEWED BY SUBMITTED BY APPROVED BY

PROJ ENGR, TIMOTHY DYER PLATFORM MGR, CLELAND MICHEEL

DESIGNED DATE 02/27/2006 JCN

DRAWN TAD CHICAGO NAS IMPLEMENTATION CENTER

CHECKED EGS

ARR-D-LOC33-A02

REV DATE DESCRIPTION JCN RECD DATE APVD

CONTRACTOR SHALL SUBMIT REQUESTS FOR SUBSTITUTION OF SPECIFIC MANUFACTURER'S ITEMS SHOWN PER PARAGRAPH 1 OF THE SPECIAL SPECIFICATIONS.

I:\aerocorp\042850A\gen\amesis\loc in drawings 3-d-05-ARR-D-LOC33-A02.dwg 3/18/2006 3:18:14 PM NAME