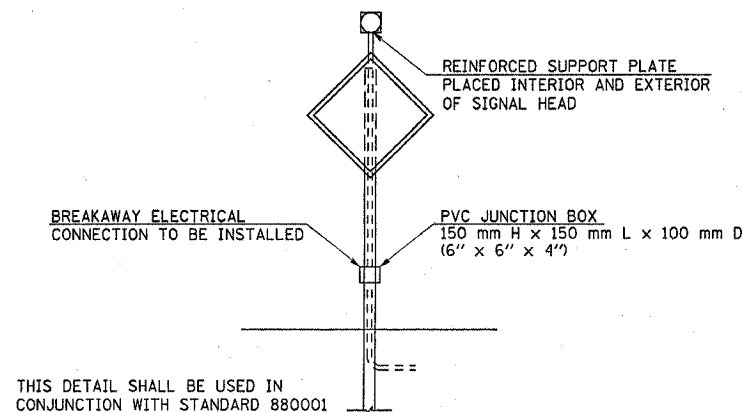


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
320	1351	MACON	5	5

CONTRACT NO. 70416

**POST MOUNTED FLASHING BEACON**

B I L L O F M A T E R I A L S
IL. ROUTE 121 & WESTLAWN AVE.

<u>ITEM</u>	<u>UNIT</u>	<u>QUANTITY</u>
SERVICE INSTALLATION, TYPE B	EACH	1
WOOD POLE, 35 FT., CLASS 4	EACH	1
CONDUIT IN TRENCH, 1 1/2" DIA., PVC	FOOT	1147
CONDUIT, AUGERED 1 1/2" DIA., PVC	FOOT	214
CONDUIT ATTACHED TO STRUCTURE, 1 1/2" DIA., GALVANIZED STEEL	FOOT	53
HANDHOLE	EACH	2
TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	1147
FLASHER CONTROLLER	EACH	1
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 2C	FOOT	161
ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C	FOOT	1328
ELECTRIC CABLE IN CONDUIT, SERVICE, NO. 6 2 C	FOOT	5
REMOVE AND REINSTALL WOOD SIGN POST	EACH	1
SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 1-SECTION, POST MOUNTED	EACH	4
SIGN AND POST	EACH	2
RELOCATE SIGN PANEL	EACH	1

GENERAL NOTES

1. A TWO CIRCUIT FLASHER WILL BE PROVIDED WITH THE FLASHER CONTROLLER TO OBTAIN THE WIG-WAG OPERATION.
2. INSTALLTION SHALL BE IN CONFORMANCE WITH STANDARD 880001.
3. THE ACTUAL LOCATION OF THE HANDHOLES AND GULFBXES SHALL BE DETERMINED BY THE ENGINEER.