
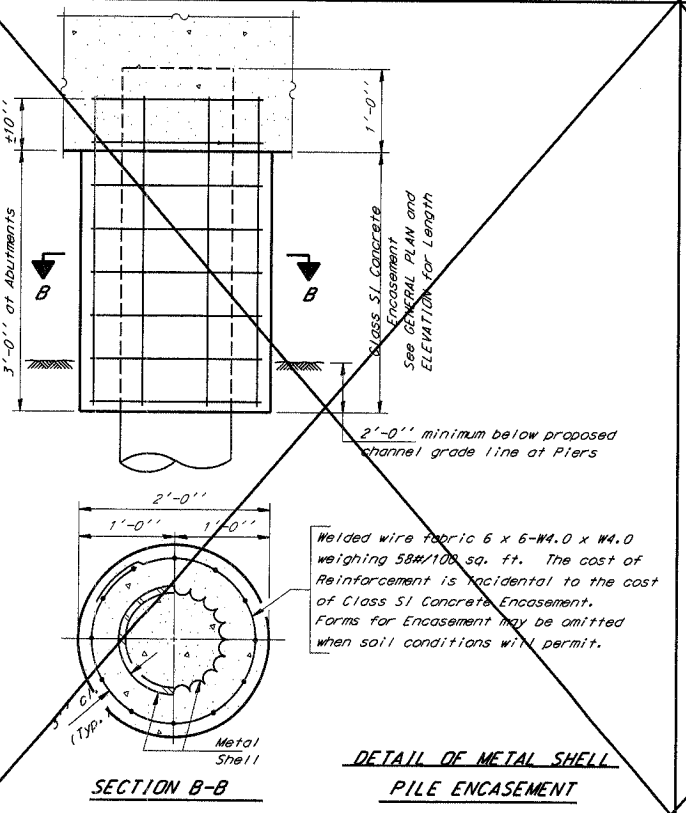
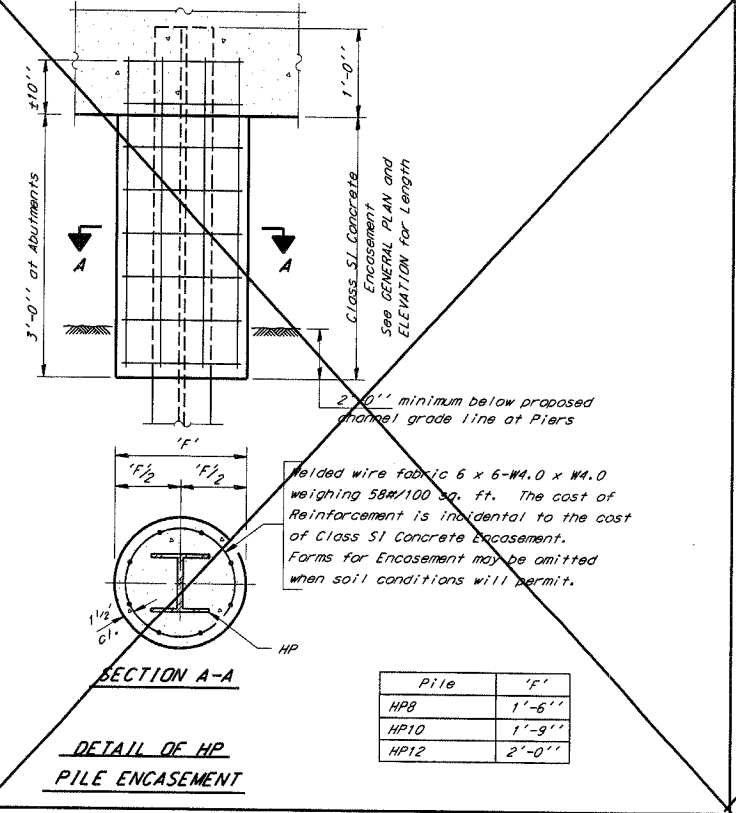
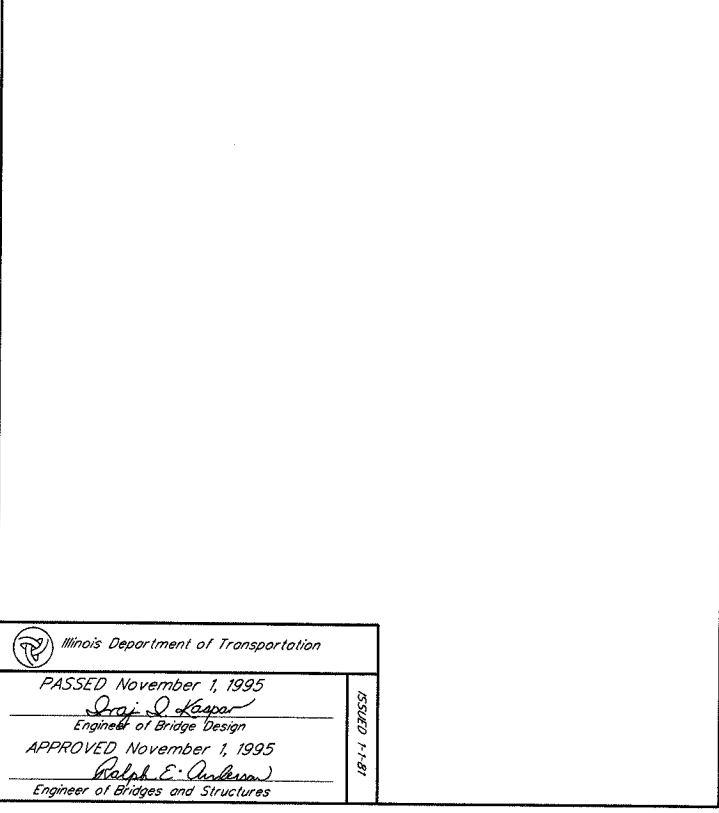
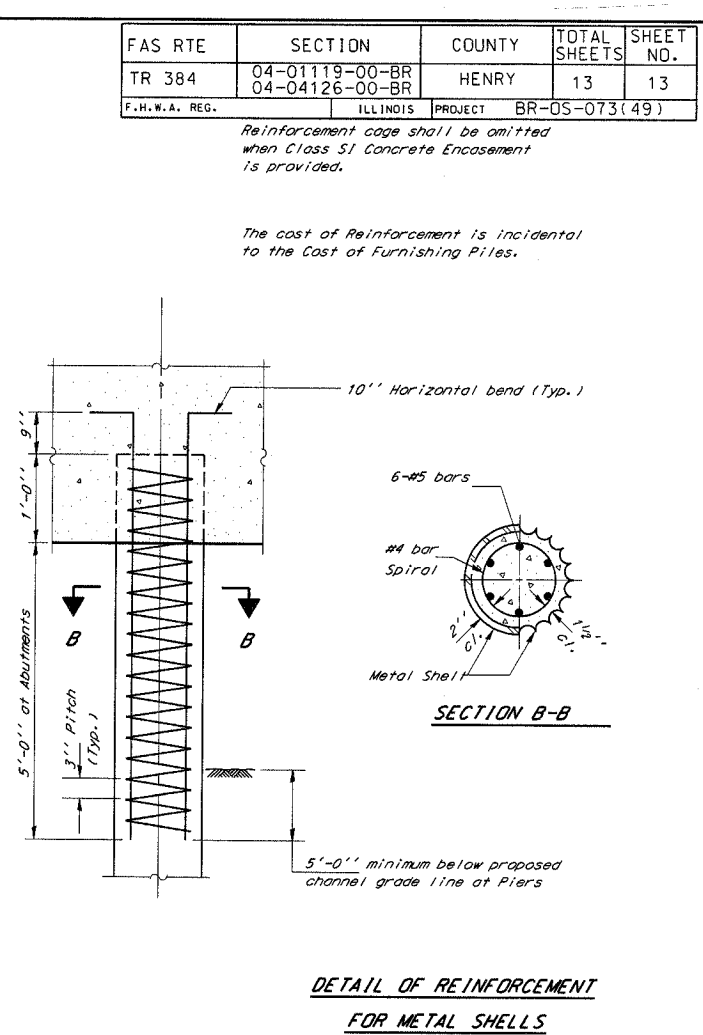
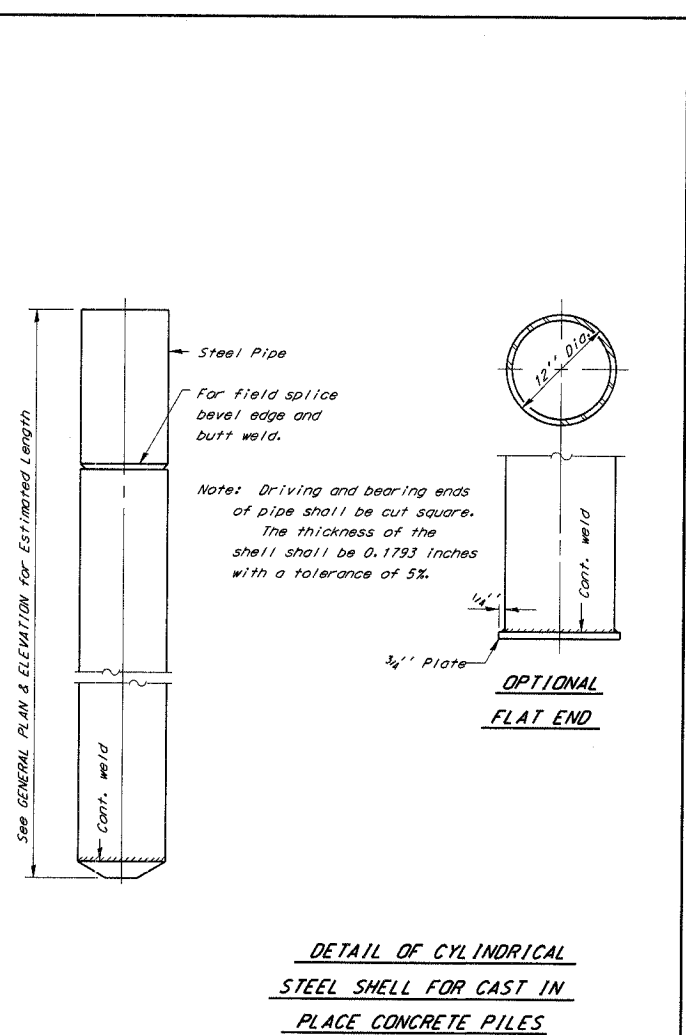
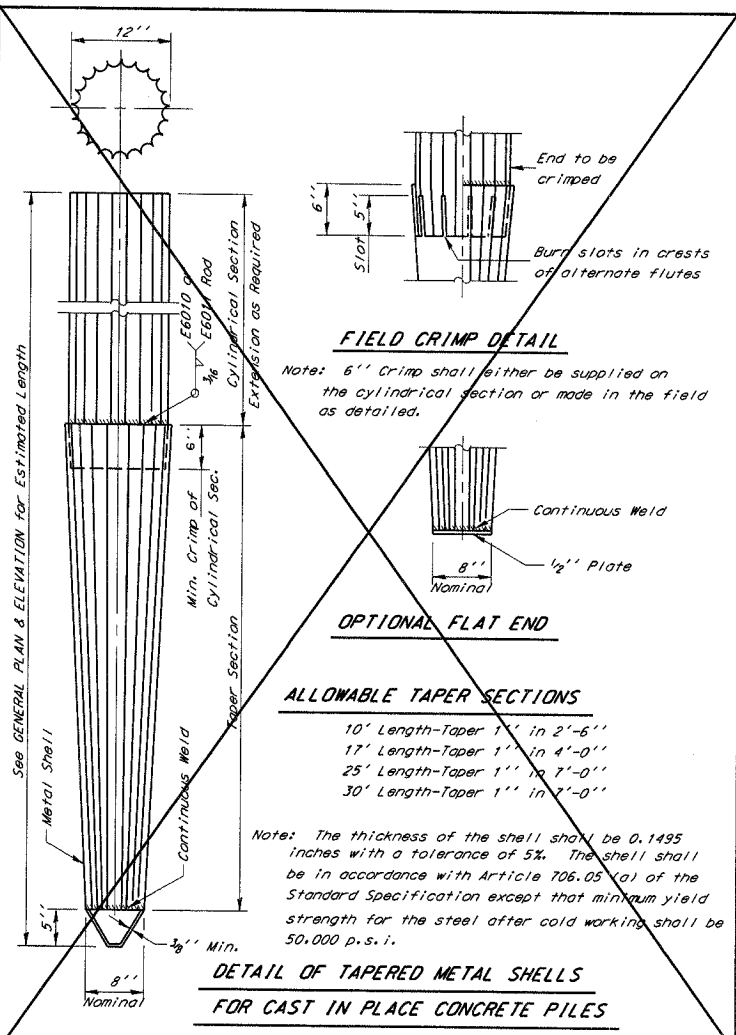


FAS RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
TR 384	04-01119-00-BR 04-04126-00-BR	HENRY	13	13
F.H.W.A. REG.	ILLINOIS PROJECT	BR-05-073(49)		

Reinforcement cage shall be omitted when Class S1 Concrete Encasement is provided.

The cost of Reinforcement is incidental to the Cost of Furnishing Piles.

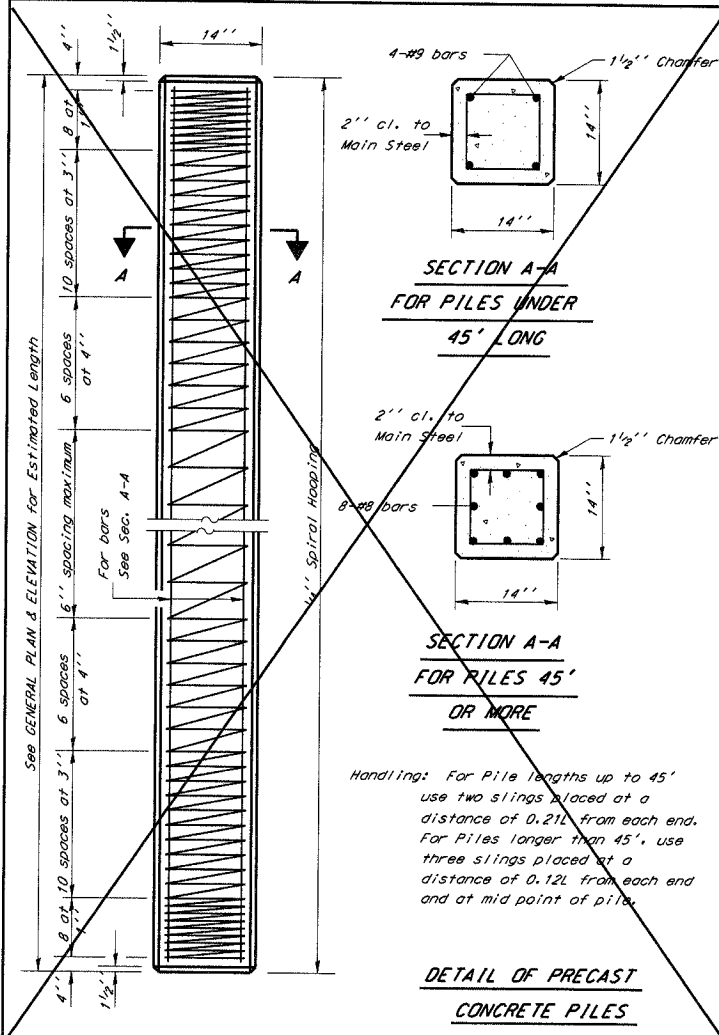

QUANTITIES/LIN. FT. OF ENCASEMENT

(STEEL PILES)

Pile Size	Item	Quantity
HP8	Class S1 Concrete Encasement	0.063 C.Y.
HP10	Class S1 Concrete Encasement	0.086 C.Y.
HP12	Class S1 Concrete Encasement	0.112 C.Y.

(METAL SHELL PILES)

Pile Size	Item	Quantity
12" Dia.	Class S1 Concrete Encasement	0.087 C.Y.

PILE DETAILS

STANDARD CX-1

Illinois Department of Transportation

PASSED November 1, 1995

Dan O. Kasper
Engineer of Bridge Design

APPROVED November 1, 1995

Ralph E. Anderson
Engineer of Bridges and Structures

18-1-1 (2/79)S2