

MCDONOUGH COUNTY	SHEET NO.	1
F.A.S. ROUTE 443	TOTAL SHEETS	2
PROJECT NO. RS-443(108)		
SECTION 02-00098-00-RS		
CONTRACT NO. 89295		

INDEX OF SHEETS

- COVER SHEET AND SUMMARY OF QUANTITIES
- TYPICAL SECTIONS, DETAILS, AND GENERAL NOTES

LIST OF STANDARDS

- 701001-01 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701006-02 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701011-01 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701201-02 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701301-02 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701306-01 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701311-02 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 702001-05 TRAFFIC CONTROL DEVICES
- BLR24-1 MAILBOX TURNOUT FOR LOCAL ROADS

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**PLANS FOR
PROPOSED LOCAL AGENCY IMPROVEMENT
SURFACE TRANSPORTATION RURAL**


McDONOUGH COUNTY
F.A.S. ROUTE 443 - COUNTY HIGHWAY 16
ST. FRANCIS BLACKTOP
SECTION 02-00098-00-RS
JOB NO. C-94-080-03
PROJECT NO. RS-0443(108)

SUMMARY OF QUANTITIES
CONSTRUCTION TYPE CODE 1000-2A

X4066514	POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N50	4,597.0	TON
X4066654	POLYMERIZED BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N50	8,489.0	TON
40200800	AGGREGATE SURFACE COURSE, TYPE B	300.0	TON
40600100	BITUMINOUS MATERIALS (PRIME COAT)	7,969.0	GALLON
40600300	AGGREGATE (PRIME COAT)	159.0	TON
40600980	BITUMINOUS SURFACE REMOVAL - BUTT JOINT	1,198.0	SQ YD
44300300	AREA REFLECTIVE CRACK CONTROL, TREATMENT SYSTEM A	39,527.0	SQ YD
48101200	AGGREGATE SHOULDERS, TYPE B	2,803.0	TON
70101700	TRAFFIC CONTROL AND PROTECTION	1.0	L SUM
70300100	SHORT-TERM PAVEMENT MARKING	3,260.0	FOOT
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	538.0	SQ FT
78001110	PAINT PAVEMENT MARKING LINE 4"	44,733.0	FOOT



REGIONAL MAP

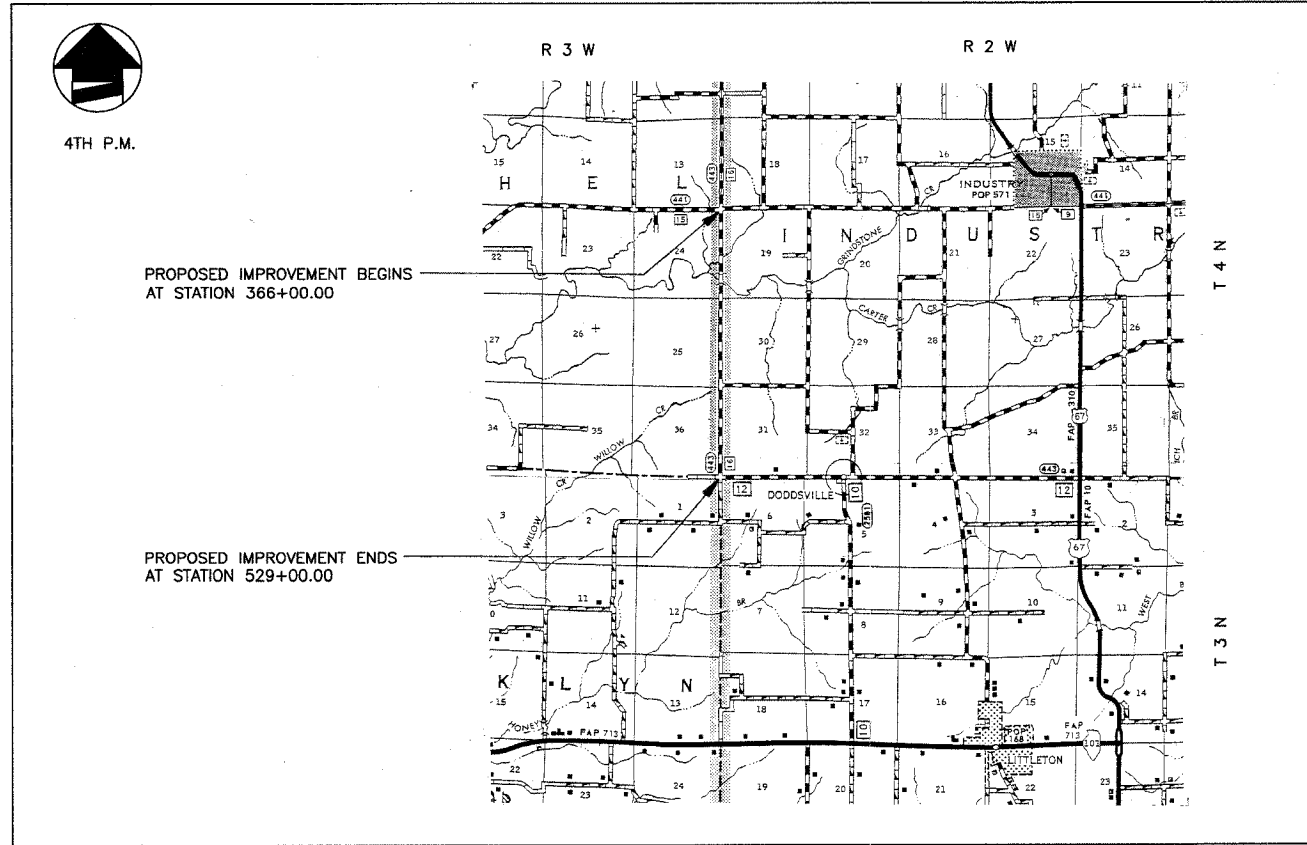

LOCATION MAP

APPROXIMATE SCALE: 1" = 0.5 MILE
TOTAL & NET LENGTH OF PROJECT: 16,300.00 FT = 3.087 MI.
ROADWAY CLASSIFICATION: MAJOR COLLECTOR
DESIGN GUIDELINES: RURAL
DESIGN SPEED = 55 M.P.H.
ADT = 600/800 (YEAR 2002)
VARIANCES GRANTED - NONE
COMMITMENTS - NONE

QC\QA BITUMINOUS SUPERPAVE PROJECT

PLANS PREPARED BY THE
MCDONOUGH COUNTY HIGHWAY DEPARTMENT
MACOMB, ILLINOIS

APPROVED FEB. 14 20 05
[Signature]
MCDONOUGH COUNTY ENGINEER

PASSED FEBRUARY 23 20 05
[Signature]
DISTRICT 4 ENGINEER OF LOCAL ROADS & STREETS

RELEASING FOR BID BASED ON LIMITED REVIEW FEB 25 20 05
[Signature]
DEPUTY DIRECTOR OF HIGHWAYS, REGION 3 ENGINEER
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROFESSIONAL ENGINEER
JOSHUA K. RICHARDSON
P.E. No. 062-55997
EXPIRES 11/30/2005

2/14/05
DATE

CALL JULIE TOLL FREE
1(800)892-0123
OPERATES 24 HOURS A DAY 365 DAYS A YEAR



48 HOURS BEFORE YOU DIG

JOB NO. C-94-080-03
CONTRACT NO. 89295