

ROUTE	SECTION	COUNTY	TOT. SHTS.	SHT.
F.A.S. 789	02-00178-00-RS	JEFFERSON	2	1
JEFFERSON COUNTY ROAD DISTRICT				

CONTRACT 95425

INDEX OF SHEETS

- COVER SHEET, LOCATION MAP
- GENERAL NOTES: TYPICAL EXISTING AND PROPOSED CROSS SECTIONS, SUMMARY OF QUANTITIES, SCHEDULE OF BITUMINOUS MIX COMPLETE BREAKDOWN AND STRIPING, DETAILS OF MAILBOX TURNOUTS, PRIVATE ENTRANCES AND SIDE ROADS.

STANDARDS

- 000001-04
- 442201-01
- 630001-05
- 630101-05
- 630301-03
- 635006-02
- 701006-02
- 701306-01
- 701311-02
- 701336-04
- 702001-05
- 780001-01
- BLR 21-6
- BLR 22-4

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

PLANS FOR PROPOSED  
FEDERAL-AID SECONDARY PROJECT

C.H. 3 JEFFERSON COUNTY  
F.A.S. ROUTE 789  
SECTION 02-00178-00-RS  
JOB NO. C-97-026-05  
PROJECT NO. RS-789(112)

SUMMARY OF QUANTITIES

Quantity	Unit	Item	Code Number
1860	FOOT	SHORT-TERM PAVEMENT MARKING REMOVAL	XX001140
323	SQ. YD.	COLD MILLING	80016700
280	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
4525	TON	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE MIX "C", 950	24066411
4260	GALLON	BITUMINOUS MATERIALS (PRIME COAT)	40600100
2495	TON	LEVELING BINDER (MACHINE METHOD), SUPERPAVE	24066765
		NS0	
4	SQ. YD.	CLASS D PATCHES, TYPE I, 9 INCH	44201749
58	SQ. YD.	CLASS D PATCHES, TYPE II, 9 INCH	44201753
76	SQ. YD.	CLASS D PATCHES, TYPE III, 9 INCH	44201757
320	SQ. YD.	CLASS D PATCHES, TYPE IV, 9 INCH	44201759
41333	SQ. YD.	AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A	44300300
1511	TON	AGGREGATE SHOULDERS, TYPE B	48101200
12	FOOT	STEEL PLATE BEAM GUARDRAIL, TYPE B	63000005
87	FOOT	STEEL PLATE BEAM GUARDRAIL, ATTACHED TO STRUCTURES	63000025
12	EACH	TRAFFIC BARRIER TERMINAL TYPE I, SPECIAL (TANGENT)	63100167
1	L. SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	70100460
3720	FOOT	SHORT-TERM PAVEMENT MARKING	70100100
58001	FOOT	THERMOPLASTIC PAVEMENT MARKING-LINE 4"	78000200
12	EACH	TERMINAL MARKER DIRECT APPLIED	78010500
1	L. SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701335	70100400
131	SQ. YD.	BITUMINOUS SURFACE REMOVAL - BUTT JOINT	40600980


THE ACCEPTANCE OF THIS PROJECT IS BASED ON THE MINIMUM DESIGN CRITERIA FOR A FEDERAL AID LAPP TYPE PROJECT

*Christine M. Reed*

CHRISTINE M. REED, P.E.  
DEPUTY DIRECTOR OF HIGHWAYS  
REGION FOUR ENGINEER

GUARDRAIL SCHEDULE

SPBGR ATTACHED TO STRUCTURE	SPBGR TYPE B	TRAFFIC BARRIER TERMINAL TYPE I, SPECIAL (TANGENT)
308+13.75 TO 308+26.25 LT. 307+81.75 TO 307+94.25 RT. 384+12.63 TO 384+31.37 LT. 384+29.63 TO 384+48.37 RT. 399+20.75 TO 399+33.25 LT. 399+20.75 TO 399+33.25 RT.	384+31.37 TO 384+37.62 LT. 384+23.38 TO 384+29.63 RT.	307+63.75 TO 308+13.75 LT. 308+26.25 TO 308+76.25 LT. 307+31.75 TO 307+81.75 RT. 307+94.25 TO 308+44.25 RT. 383+62.63 TO 384+12.63 LT. 384+37.62 TO 384+87.62 LT. 383+73.38 TO 384+23.38 RT. 384+48.37 TO 384+98.37 RT. 398+70.75 TO 399+20.75 LT. 399+33.25 TO 399+83.25 LT. 398+70.75 TO 399+20.75 RT. 399+33.25 TO 399+83.25 RT.
TOTAL 87.5'	TOTAL 12.50'	TOTAL 12 EACH

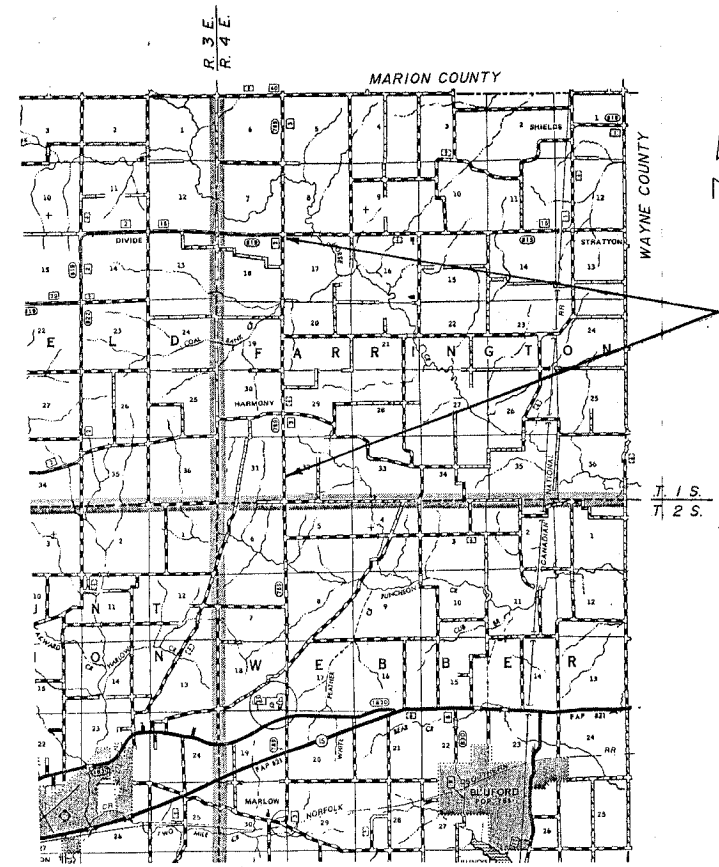

SECTION 02-00178-00-RS  
BEGINS STA. 270+00  
ENDS STA. 456+00

J.U.L.I.E. 1-800-892-0123

RURAL MAJOR COLLECTOR  
ADT 1050  
DESIGN SPEED 50 M.P.H.

TOTAL SECTION LENGTH 18,600=3.523 MI.  
OMISSION 0.00'  
NET SECTION LENGTH 18,600=3.523 MI.

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

PASSED March 1 2005  
*Maureen Kasel*  
DISTRICT ENGR., LOCAL ROADS & STREETS

APPROVED MARCH 2 2005  
*Christine M. Reed*  
CHRISTINE M. REED, P.E.  
DEPUTY DIRECTOR OF HIGHWAYS  
REGION FOUR ENGINEER

