


CODE NUMBER	PAY ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION TYPE CODES						
				0001	0040	0010	0008	0021	0021	
X7030055	WET REFLECTIVE TEMPORARY TAPE TYPE III, 24 INCH	FOOT	453	453						
X7040650	REMOVE TEMPORARY CONCRETE BARRIER	FOOT	2,999	2,999						
X8040310	ELECTRICAL SERVICE DISCONNECT	EACH	5					5		
* 8050020	SERVICE INSTALLATION - POLE MOUNTED	EACH	1							1
X8210190	LUMINAIRE, SODIUM VAPOR, HIGH MAST, HORIZONTAL MOUNT, 750 WATT (INSTALL ONLY)	EACH	13						13	
X8250110	LIGHTING CONTROLLER, RADIO CONTROL, DUPLEX CONSOLE TYPE, WITH SCADA	EACH	2						2	
X8710035	FIBER OPTIC CABLE 96 FIBERS, SINGLE MODE	FOOT	25,400						25,400	
X8710052	FIBER OPTIC TERMINATION PANEL, 12 FIBER, FO TERM PANEL 12F	EACH	5						5	
X8850102	INDUCTION LOOP	FOOT	642						642	
Z0001050	AGGREGATE SUBGRADE 12"	SQ YD	153,943	153,943						
Z0004552	APPROACH SLAB REMOVAL	SQ YD	280.0	280.0						
Z0013796	SEDIMENT CONTROL, STABILIZED CONSTRUCTION ENTRANCE	SQ YD	2,280	2,280						
Z0013798	CONSTRUCTION LAYOUT	L SUM	1	1						
Δ Z0014800	CULVERT TO BE CLEANED	FOOT	114	114						
Z0018002	DRAINAGE SCUPPERS, DS-11	EACH	2					2		
Z0022800	FENCE REMOVAL	FOOT	21,889	21,889						
Z0023202	SEDIMENT CONTROL, DRAINAGE STRUCTURE INLET FILTER CLEANING	EACH	308	308						
Z0023206	SEDIMENT CONTROL, SILT FENCE MAINTENANCE	FOOT	9,155	9,155						
Z0029999	IMPACT ATTENUATOR REMOVAL	EACH	3	3						
Z0030030	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW), TEST LEVEL 3	EACH	3	3						
Z0030150	IMPACT ATTENUATORS (NON-REDIRECTIVE), TEST LEVEL 3	EACH	2	2						
Z0030250	IMPACT ATTENUATORS, TEMPORARY (NON- REDIRECTIVE), TEST LEVEL 3	EACH	6	6						
Z0030280	IMPACT ATTENUATORS, TEMPORARY (SEVERE USE, NARROW), TEST LEVEL 3	EACH	10	10						
Z0030350	IMPACT ATTENUATORS, RELOCATE (NON- REDIRECTIVE), TEST LEVEL 3	EACH	16	16						
Z0030850	TEMPORARY INFORMATION SIGNING	SQ FT	103	103						
* Z0033028	MAINTENANCE OF LIGHTING SYSTEM	CAL MO	18						18	
* Z0033044	RE-OPTIMIZE TRAFFIC SIGNAL SYSTEM LEVEL 1	EACH	1						1	
* Z0033052	COMMUNICATIONS VAULT	EACH	8						8	
* 88600700	PREFORMED DETECTOR LOOP	FOOT	1,056						268	788
Z0034210	MECHANICALLY STABILIZED EARTH RETAINING WALL	SQ FT	3,764					3,764		
Z0042002	POROUS GRANULAR EMBANKMENT, SUBGRADE	CU YD	5,780	5,780						
Z0046304	PIPE UNDERDRAINS FOR STRUCTURES 4"	FOOT	4,227		4,043	184				
Z0056220	SAND MODULE IMPACT ATTENUATOR TO BE REMOVED	EACH	4	4						
Z0062456	TEMPORARY PAVEMENT	SQ YD	17,847	17,847						
Z0073510	TEMPORARY TRAFFIC SIGNAL TIMING	EACH	1							1
Z0076600	TRAINEES	HOURLY								

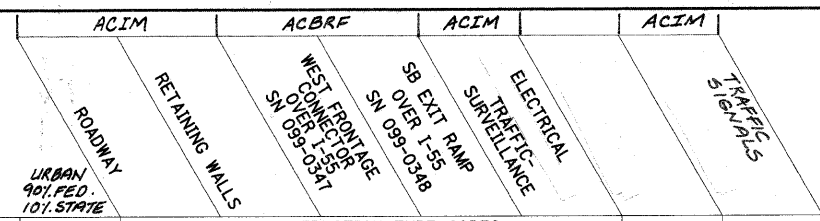

McDonough Associates Inc.
 Engineers / Architects
 130 East Randolph Street, Chicago, Illinois 60601

Δ = Non-participating
 * DENOTES SPECIALTY ITEM

FILE NAME = D:\60F12-SHT-S0010.dgn	USER NAME = TKIvege1	DESIGNED - MJT	REVISED -
		DRAWN - MJT	REVISED -
PLOT SCALE = 1:50		CHECKED - DLT	REVISED -
PLOT DATE = 2/4/2011		DATE - 2/4/11	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES			
SCALE: NONE	SHEET NO. 10 OF 11 SHEETS	STA.	TO STA.

F.A.I. RTE. 55	SECTION 99-2HB-28-1	COUNTY WILL	TOTAL SHEETS 756	SHEET NO. 14
CONTRACT NO. 60F12			ILLINOIS FED. AID PROJECT	