


TEMPORARY LIGHT POLE DETAIL

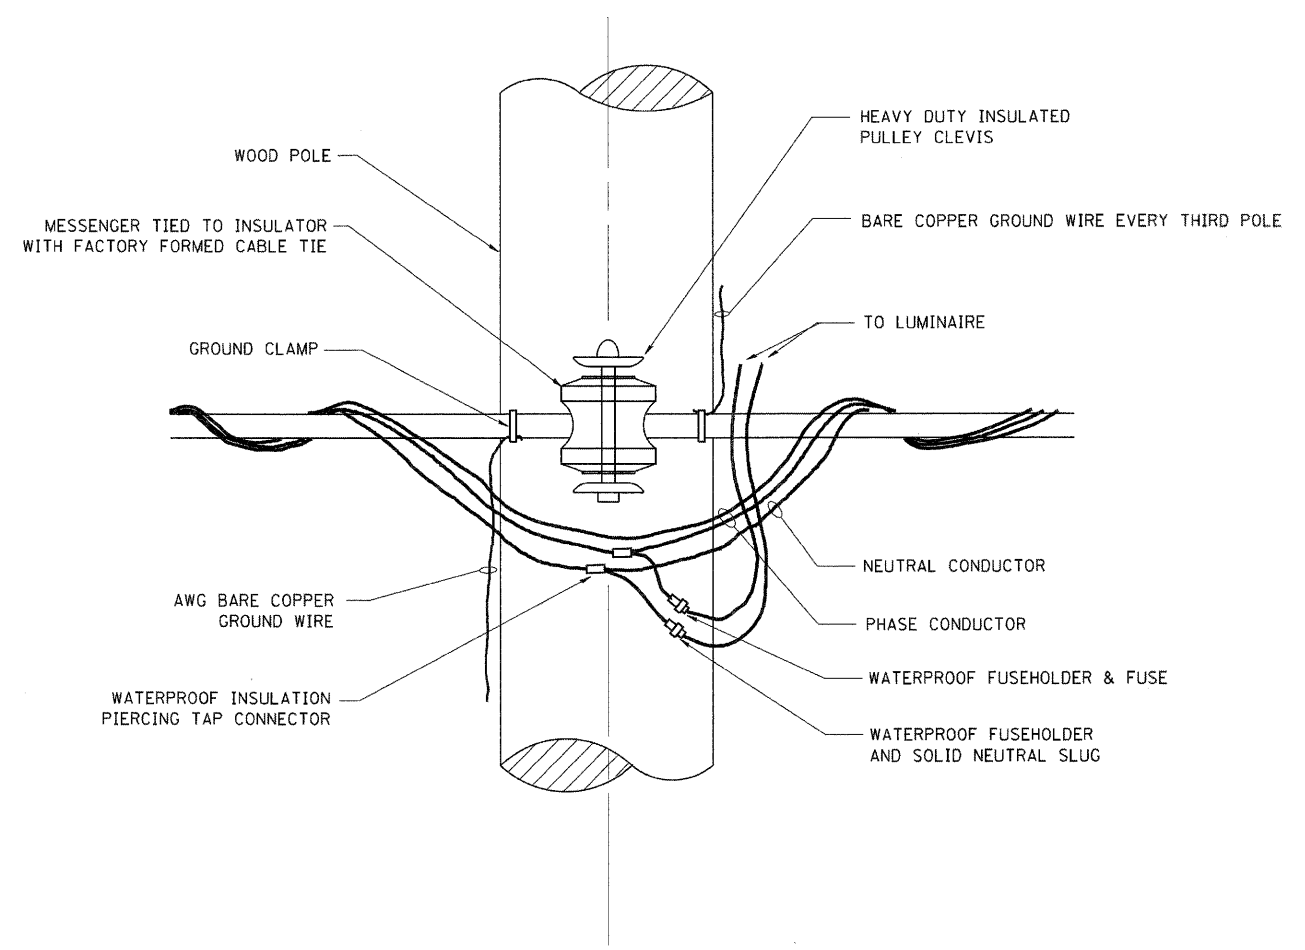

TEMPORARY LIGHT POLE ATTACHMENT DETAIL

MODIFICATIONS TO IDOT STANDARD:

1. CONTRACTOR SHALL AUGER A 30" DIA HOLE FOR EACH TEMPORARY POLE LOCATION. CLASS SI CONCRETE SHALL BE POURED AROUND THE POLE UP TO 6" BELOW GRADE. BACKFILL THE REMAINING DEPTH OF THE HOLE TO MATCH GRADE. THE COST OF CLASS SI CONCRETE, GROUND ROD, AND #6 COPPER GROUND WIRE SHALL BE INCLUDED IN THE COST OF "LIGHT POLE, WOOD, 100 FOOT, CLASS 1, WITH 15FT MAST ARM" PAY ITEM. SEPARATE PAYMENT WILL NOT BE MADE.
2. SEE DRAWING ED-6 FOR MAST ARM AND TEMPORARY LUMINAIRE INSTALLATION DETAILS.

NOTES:

1. ALL DIMENSIONS IN INCHES (MILLIMETERS) UNLESS OTHERWISE INDICATED

McDonough Associates Inc.  
 Engineers / Architects  
 130 East Randolph Street, Chicago, Illinois 60601

FILE NAME = D162F12-SHT-BE-800.dgn	USER NAME = TKIuegal	DESIGNED - IDOT	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TEMPORARY LIGHT POLE DETAILS</b>			F.A.I RTE. 55	SECTION 99-2HB-2B-1	COUNTY WILL	TOTAL SHEETS 756	SHEET NO. 434
PLOT SCALE = 1:1	CHECKED - KMY	DRAWN - CUM	REVISED -		SCALE:	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.	CONTRACT NO. 60F12			
PLOT DATE = 2/3/2011	DATE - 2/4/11	REVISOR -	REVISOR -		FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT							