


AGGREGATE ENTRANCE AND SIDE ROAD DETAIL

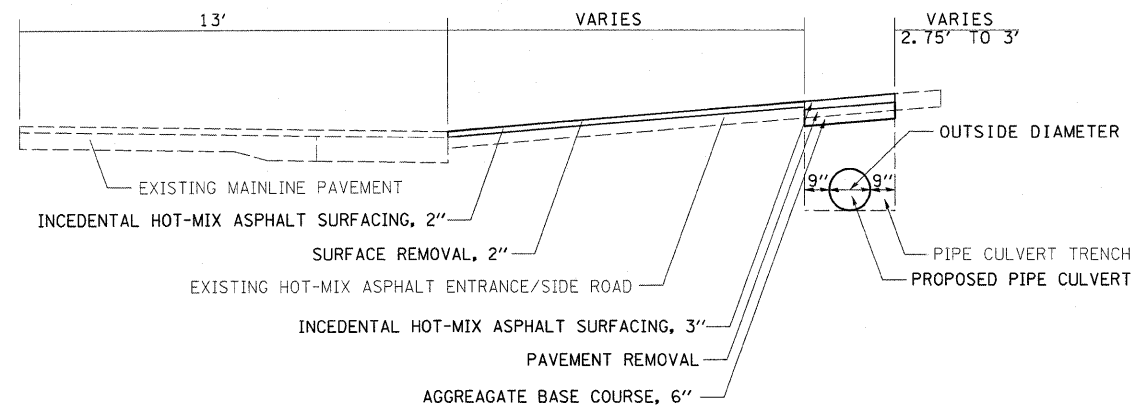

HOT-MIX ASPHALT ENTRANCE AND SIDE ROAD DETAIL

1. THE COST OF THE SURFACE REMOVAL, 2" AND THE PAVEMENT REMOVAL FOR THE ENTRANCES AND PUBLIC ROAD APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.
2. THE COST OF THE BITUMINOUS MATERIALS AND AGGREGATE (PRIME COAT) FOR THE ENTRANCES AND PUBLIC ROAD APPROACHES SHALL BE INCLUDED IN THE PAY ITEM INCIDENTAL HOT-MIX ASPHALT SURFACING.

ENTRANCE SCHEDULE

STATION	SIDE	TYPE	MATERIAL TYPE	AGGREGATE BASE COURSE	AGGREGATE SURFACE COURSE, TYPE B	AGGREGATE FOR TEMPORARY ACCESS	INCIDENTAL HOT-MIX ASPHALT SURFACING
				TON	TON	TON	TON
50+42.81	LT	PE	AGG	-	1.7	-	-
83+68.69	LT	FE	AGG	-	3.3	-	-
103+56.10	RT	FE	AGG	-	3.2	-	-
116+76.10	LT	FE	AGG	-	2.8	-	-
125+68.02	LT	PE	AGG	-	3.2	-	-
135+41.94	RT	FE	AGG	-	3.2	-	-
139+65.39	LT	FE	AGG	-	3.6	-	-
141+75.96	RT	FE	AGG	-	3.2	-	-
148+55.77	LT	FE	AGG	-	3.1	-	-
156+51.05	RT	FE	AGG	-	3.7	-	-
185+53.01	RT	FE	AGG	-	4.3	-	-
191+88.42	RT	FE	AGG	-	3.3	-	-
193+44.18	LT	PE	HMA	1.8	-	1.0	5
205+93.22	RT	FE	AGG	-	5.3	-	-
210+05.79	LT	FE	AGG	-	6.1	-	-
222+39.62	LT	PRA (1725 N)	HMA	2.3	-	1.2	7.3
222+46.38	RT	FE	AGG	-	3.5	-	-
234+22.94	RT	PRA (1750 N)	HMA	2.7	-	1.4	8.5
235+66.40	LT	PE	AGG	-	4.9	-	-
247+48.33	RT	FE	AGG	-	3.5	-	-
260+23.82	LT	FE	AGG	-	3.2	-	-
273+82.94	LT	FE	AGG	-	3.5	-	-
278+90.45	RT	FE	AGG	-	3.3	-	-
288+75.28	RT	FE	AGG	-	3	-	-
301+18.25	LT	FE	AGG	-	3.3	-	-
354+65.65	LT	FE	AGG	-	3.4	-	-
377+69.84	RT	PE	AGG	-	3.4	-	-
383+07.16	LT	PE	AGG	-	3.7	-	-
384+26.66	LT	FE	AGG	-	3.4	-	-
393+66.91	RT	FE	AGG	-	3.3	-	-
401+29.48	LT	FE	AGG	-	3.2	-	-
403+53.53	LT	FE	AGG	-	3.2	-	-
413+34.98	LT	FE	AGG	-	4.3	-	-
413+45.00	RT	FE	AGG	-	4.1	-	-
TOTALS				7	110	4	21

FILE NAME =	USER NAME = teasleyk	DESIGNED -	REVISED -
c:\pwork\pwork\teasleyk\d0239387\074504-shd-details.dgn		DRAWN -	REVISED -
	PLOT SCALE = 50.0000 / 1 IN.	CHECKED -	REVISED -
	PLOT DATE = 12/14/2010	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

ENTRANCE SCHEDULE AND DETAILS			
SCALE:	SHEET NO. OF SHEETS	STA. TO STA.	

F.A.P. RTE. 770	SECTION	COUNTY Shelby	TOTAL SHEETS 24	SHEET NO. 6
ILLINOIS FED. AID PROJECT				
CONTRACT NO. 74504				