

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	-28.00	446.50
A	276+00.50	-28.00	446.90
B	276+10.50	-28.00	447.30
S. End N. Apr. Slab	276+20.50	-28.00	447.69

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	-24.00	446.58
A	276+00.50	-24.00	446.98
B	276+10.50	-24.00	447.38
S. End N. Apr. Slab	276+20.50	-24.00	447.78

PROFILE GRADE (LEFT)

Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	-2.00	447.04
A	276+00.50	-2.00	447.44
B	276+10.50	-2.00	447.84
S. End N. Apr. Slab	276+20.50	-2.00	448.24

☉ ROADWAY

Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	0.00	447.08
A	276+00.50	0.00	447.48
B	276+10.50	0.00	447.88
S. End N. Apr. Slab	276+20.50	0.00	448.28

PROFILE GRADE (RIGHT)


Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	2.00	447.04
A	276+00.50	2.00	447.44
B	276+10.50	2.00	447.84
S. End N. Apr. Slab	276+20.50	2.00	448.24

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	24.00	446.58
A	276+00.50	24.00	446.98
B	276+10.50	24.00	447.38
S. End N. Apr. Slab	276+20.50	24.00	447.78

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
N. End N. Apr. Slab	275+90.50	28.00	446.50
A	276+00.50	28.00	446.90
B	276+10.50	28.00	447.30
S. End N. Apr. Slab	276+20.50	28.00	447.69

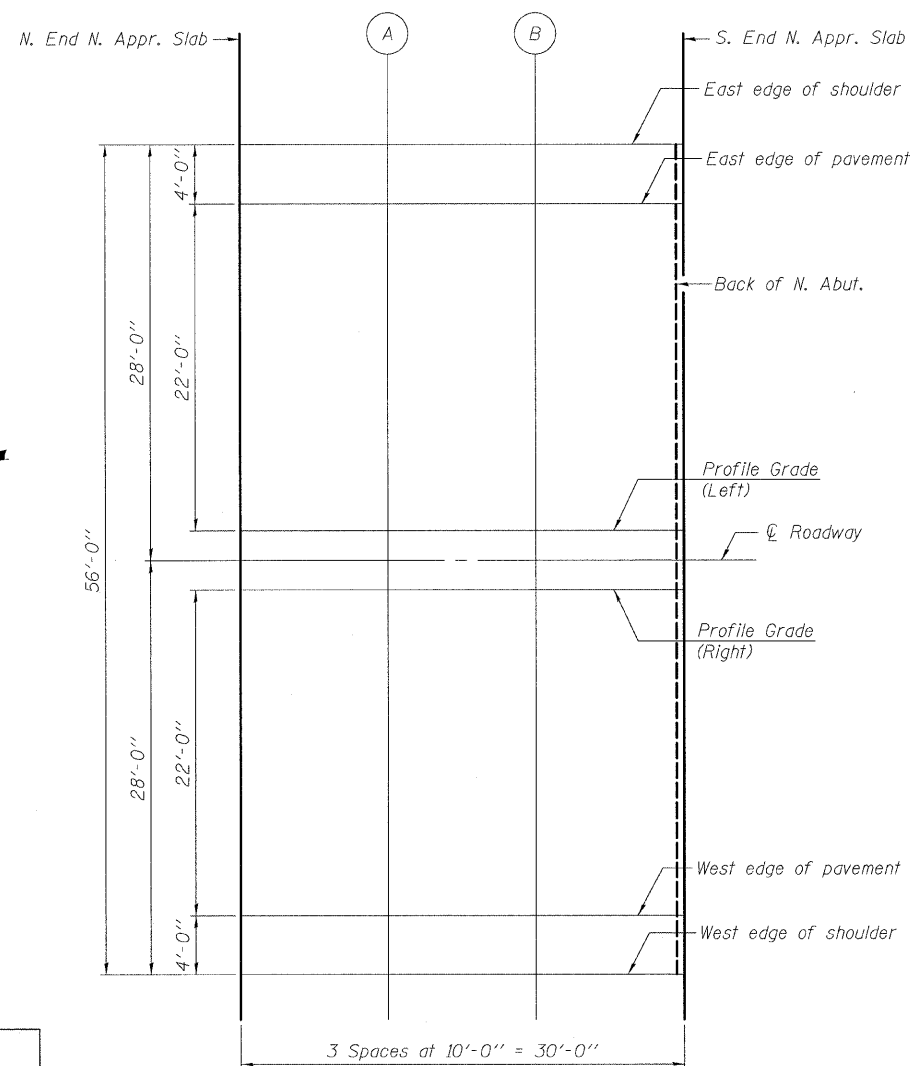

PLAN

Note:
All offsets based off ☉ Roadway. Negative offset denotes left of centerline, positive offset denotes right of centerline.

DESIGNED	KAK
CHECKED	JJD
DRAWN	AJF
CHECKED	JJD

TOP OF NORTH APPROACH
SLAB ELEVATIONS
STRUCTURE NO. 082-0038

**HORNER &
SHIFRIN, INC.
ENGINEERS**

SHEET NO. 13 48 SHEETS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	312	64-1VBR	ST. CLAIR	259	65
			CONTRACT NO. 76882		
ILLINOIS FED. AID PROJECT					