


Section Begins
Sta. 17+00

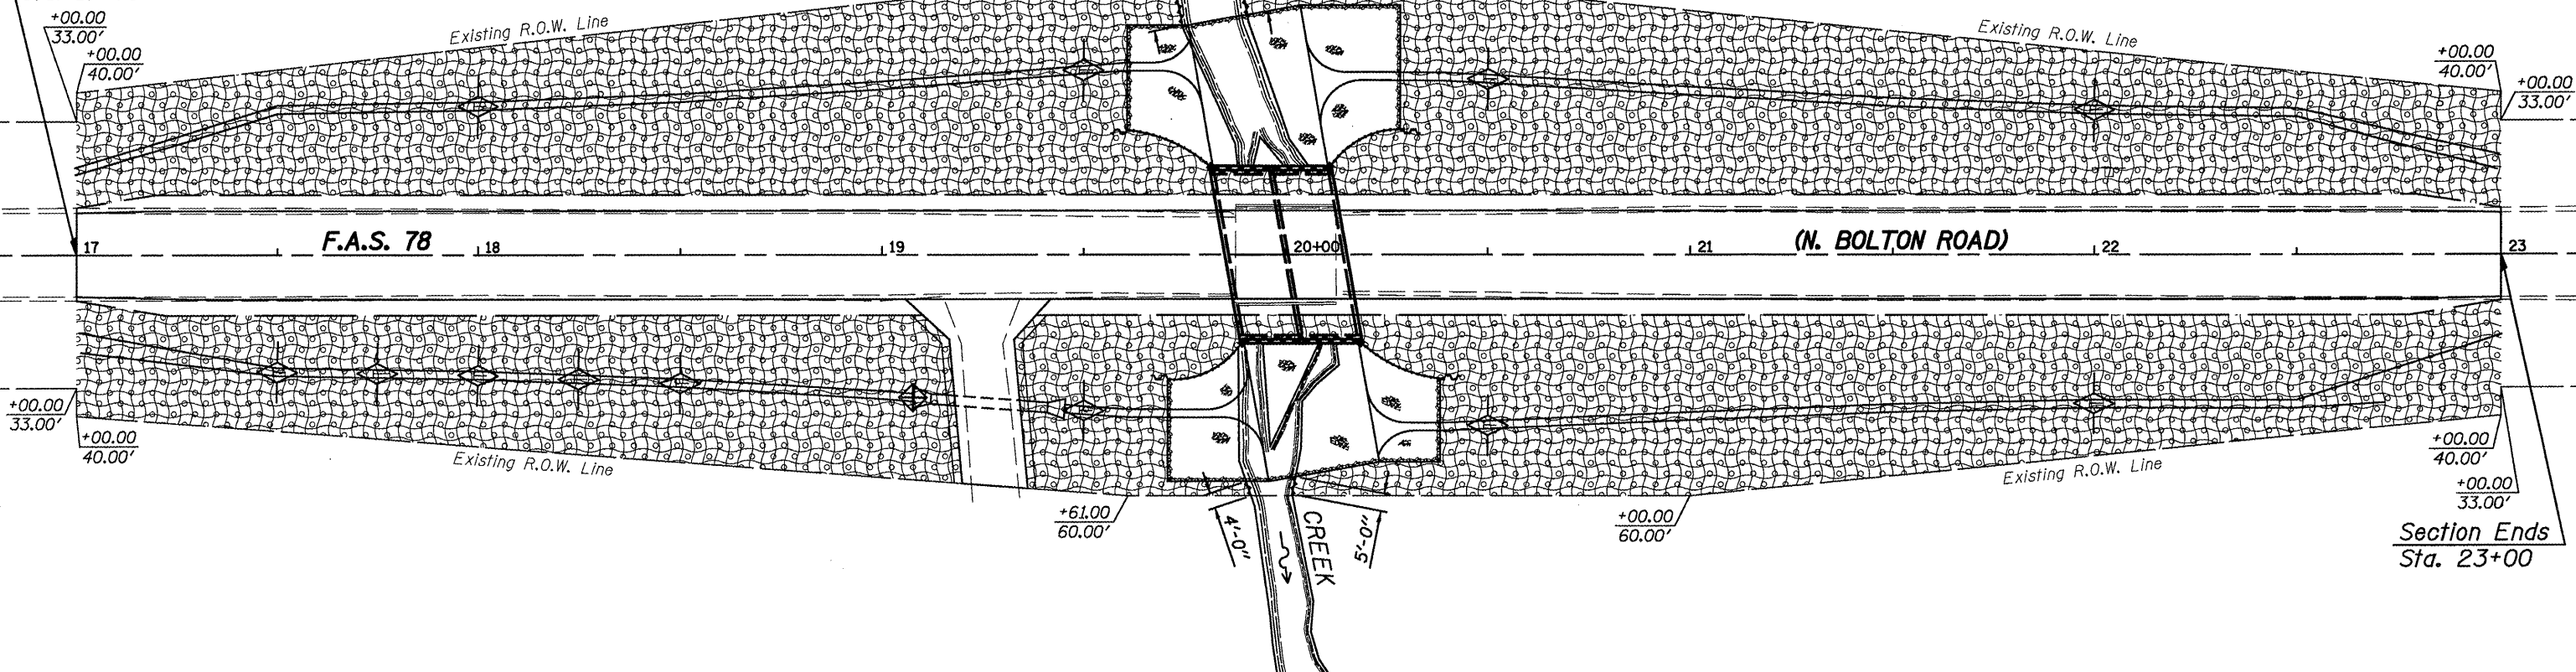

Section Ends
Sta. 23+00

EROSION CONTROL NOTES

The Soil Erosion And Sediment Control Practices Will Be Inspected Weekly And After 1/2" Of Rain Or More By The Individual On Site In Charge Of Soil Erosion And Sediment Control During The Construction Of The Project.

Perimeter Erosion Barrier Shall Comply With Section 280 Of The Standard Specifications And Shall Be Placed As Shown On The Erosion Control Plan And In Accordance With Stations Shown On The Schedule Of Quantities Sheet Or As Directed By The Engineer.

Silt Fence Shall Be Installed Following The Completion And Stabilization Of All Areas Adjacent To The On-Site Drainages. The Silt Fence Will Remain In Place Until The Contributing Area Is Stabilized.

For Seeding, Class 2 (Special) See Special Provisions.

Erosion Control Blanket Shall Be Placed In Ditches And To All Disturbed Areas As Shown On This Erosion Control Plan Sheet And In Accordance With Section 251 Of The Standard Specifications For Road And Bridge Construction.

The Use Of Green Dye In The Erosion Control Blanket Is Not Acceptable.

The Use Of Asphalt As A Binder Is Not Acceptable.

Temporary Ditch Checks Shall Comply With Section 280 Of The Standard Specifications For Road And Bridge Construction And Standard 280001-05 Located In The Plans.

Temporary Ditch Checks Shall Be Placed At Stations Called Out In The Schedule Of Quantities Or As Directed By The Engineer.

Stockpiles Of Soil And Other Building Materials To Remain In Place More Than Three (3) Days Shall Be Furnished With Erosion And Sediment Control Measures (I.E. Perimeter Silt Fence). Stockpiles To Remain In Place For 14 Days Or More Shall Receive Temporary Seeding.


All Adjacent Streets Must Be Kept Clear Of Debris. Inspected Daily And Cleaned When Necessary.

BILL OF MATERIAL

Item	Unit	Quantity
Erosion Control Blanket	Sq. Yd.	5,405
Temporary Erosion Control Seeding	Pound	112
Temporary Ditch Checks	Foot	134.5
Perimeter Erosion Barrier	Foot	24
Inlet & Pipe Protection	Each	1
Seeding, Class 2 (Special)	Acre	1.12

LEGEND

- Seeding, Class 2 (Special)
- Erosion Control Blanket
- Temporary Ditch Checks
- Inlet & Pipe Protection
- Perimeter Erosion Barrier
- Drainage Flow



REV.	DATE	BY	REMARKS

DRAWN
R.D.A.
CHECKED
M.A.C.
APPROVED
B.K.C.

**STEPHENSON COUNTY
CULVERT REPLACEMENT
F.A.S. 78 (N. BOLTON ROAD) OVER PRESTON CREEK
2010**

WILLET, HOFMANN & ASSOCIATES, INC.
CONSULTING ENGINEERS
Land Surveying - Transportation - Structural
Environmental - Architecture
809 East Second Street Dixon, Illinois 61021
Phone 815.284.3381 Fax 815.284.3386
Design Firm #184-000918
www.willett-hofmann.com

EROSION CONTROL PLAN

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A.S. 78	10-06118-00-BR	Stephenson	18	8
STA. 17+00.00 - STA. 23+00.00				
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT ER-0177(038)	

FILE = S:\PROJECTS\2010\112010\Stephenson_Co_Bolton_Road\DESIGN\STRUCT\112010ER-erosion.dgn