

- INDEX OF SHEETS**
- TITLE SHEET
 - GENERAL NOTES, UTILITY CONTACTS, AND TYPICAL SECTION
 - SUMMARY OF QUANTITIES, SCHEDULES OF QUANTITIES
 - ALIGNMENTS, TIES, BENCHMARKS, AND REMOVAL PLAN
 - PLAN AND PROFILE
 - EROSION CONTROL PLAN
 - DETOUR ROUTE
 - BRIDGE PLANS (INCLUDING BORING LOGS)
 - CROSS SECTIONS

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS**

**PLANS FOR PROPOSED
HIGHWAY BRIDGE PROGRAM
FAU 5077 (CUNNINGHAM ROAD BRIDGE)
over SOUTH BRANCH OF KENT CREEK**

**SECTION 10-00462-00-BR
PROJECT #BHM-5099(100)
WINNEBAGO COUNTY
JOB NUMBER C-92-116-10
CONTRACT#85534**

LIST OF HIGHWAY STANDARDS

- 280001-05 TEMPORARY EROSION CONTROL SYSTEMS
- 515001-03 NAME PLATE FOR BRIDGES
- 630001-09 STEEL PLATE BEAM GUARDRAIL
- 631032-06 TRAFFIC BARRIER TERMINAL TYPE 6A
- 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT
- 635011-02 REFLECTOR MARKER AND MOUNTING DETAILS
- 667101-01 PERMANENT SURVEY MARKERS
- 701006-03 OFF-RD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
- 701201-04 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS = 45 MPH
- 701301-04 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701901-01 TRAFFIC CONTROL DEVICES
- 720001-01 SIGN PANEL MOUNTING DETAILS
- 720006-02 SIGN PANEL ERECTION DETAILS
- 720011-01 METAL POSTS FOR SIGN, MARKERS & DELINEATORS
- 728001-01 TELESCOPING STEEL SIGN SUPPORTS
- 729001-01 APPLICATIONS OF TYPES A AND B METAL POSTS (FOR SIGNS AND MARKERS)
- 731001-01 BASE FOR TELESCOPING STEEL SIGN SUPPORT
- 780001-02 TYPICAL PAVEMENT MARKINGS
- BLR 21-8 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
- BLR 22-6 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS (2L, 2W, ROAD CLOSED TO THRU TRAFFIC)

NOTE
SEE SHEET 2 FOR NAMES AND ADDRESSES OF UTILITY OWNERS.






LOCATION OF SECTION INDICATED THUS: -█-

APPROVED *February 13, 2011*
COUNTY ENGINEER

PASSED *March 9, 2011*
DISTRICT ENGINEER OF LOCAL ROADS & STREETS

March 9, 2011
DEPUTY DIRECTOR OF HIGHWAYS/REGION 2 ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

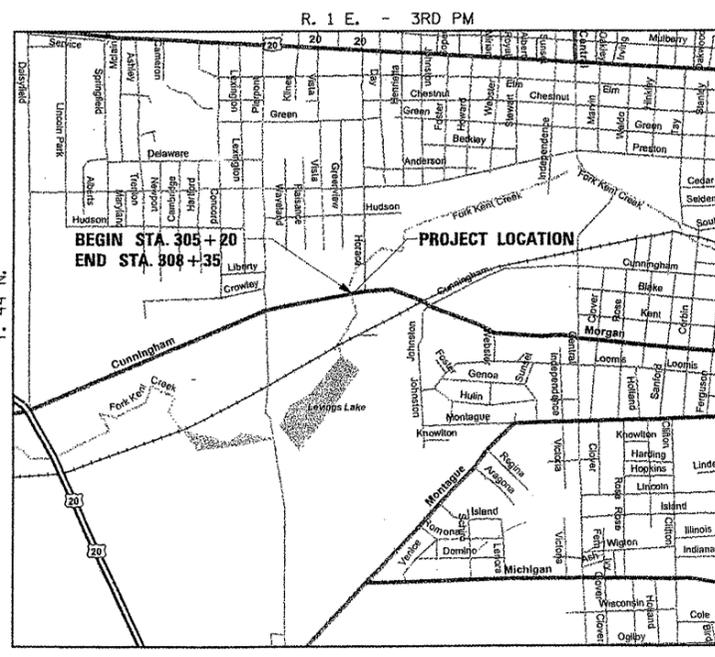


PROPOSED IMPROVEMENTS:
REMOVAL AND REPLACEMENT OF THE EXISTING BRIDGE CARRYING FA URBAN ROUTE 5077 (CUNNINGHAM RD.) OVER SOUTH BRANCH OF KENT CREEK AT STA. 306+78.5. NEW STRUCTURE CONSISTS OF A SINGLE SPAN BEAM AND CONCRETE DECK SUPERSTRUCTURE ON PILE-BENT ABUTMENTS. SN 101-3101

TRAFFIC DATA:
FUNCTIONAL CLASSIFICATION: MINOR ARTERIAL (URBAN)
2011 ADT : 3300
DESIGN SPEED : 45 MPH

PLAN SHEET SCALES: HORIZ. = 20
VERT. = 5

CROSS SECTION SHT. SCALES: HORIZ. = 10
VERT. = 5



J.U.L.I.E.
**JOINT UTILITY LOCATION
INFORMATION FOR EXCAVATION**
1-800-892-0123 OR 811

Know what's below.
Call before you dig.

UTILITY NOTE

THE LOCATIONS OF THOSE BURIED AND ABOVEGROUND UTILITIES SHOWN ARE APPROXIMATE, ARE SHOWN FOR CONTRACTOR INFORMATIONAL USE ONLY, AND ARE NOT TO BE REFERENCED FOR CONSTRUCTION PURPOSES. THE IMPLIED PRESENCE OR ABSENCE OF UTILITIES IS NOT TO BE CONSTRUED BY THE OWNER, ENGINEER, CONTRACTOR, OR SUBCONTRACTORS TO BE AN ACCURATE AND COMPLETE REPRESENTATION OF UTILITIES THAT MAY OR MAY NOT EXIST ON THE CONSTRUCTION SITE. BURIED AND ABOVEGROUND UTILITY LOCATION, IDENTIFICATION, AND MARKING ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR, REROUTING, DISCONNECTION, PROTECTION, ETC. OF ANY UTILITIES MUST BE COORDINATED AMONG THE CONTRACTOR, UTILITY COMPANY, AND OWNER. SITE SAFETY, INCLUDING THE AVOIDANCE OF HAZARDS, ASSOCIATED WITH BURIED AND ABOVEGROUND UTILITIES REMAIN THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

JOB NO. 10L0054	© Copyright Hanson Professional Services Inc. 2011	F.A.U. ROUTE 5077	SECTION 10-00462-00-BR	COUNTY Winnebago	TOTAL SHEETS 21	SHEET NO. 1
DATE 02/03/11		CONTRACT NO. 85534		FED. ROAD DIST. NO. 2 ILLINOIS FED. AID PROJECT		

LAYOUT: 02/01/11
 DRAWN: JRM 02/13/11
 REVISIONS: SKM 02/03/11
 02/01/11
 IN:\Jobs\10L0054\CADD\Road\Sheet\10L0054-001.dwg