


**TEMPORARY EROSION CONTROL NOTES**


1. THE CONTRACTOR SHALL INSTALL TEMPORARY EROSION CONTROL MEASURES PRIOR THE START OF CONSTRUCTION OPERATIONS WHICH WILL POTENTIALLY CREATE ERODIBLE CONDITIONS. PLACEMENT AND MAINTENANCE OF TEMPORARY EROSION CONTROL SYSTEMS WILL BE UTILIZED THROUGHOUT THE CONSTRUCTION LIMITS.
2. TEMPORARY EROSION CONTROL MEASURES SHALL BE CONSTRUCTED AS SHOWN ON THE PLANS AND AS DIRECTED BY THE ENGINEER. THE WORK SHALL BE COMPLETED IN ACCORDANCE WITH SECTION 280-TEMPORARY EROSION CONTROL OF THE STANDARD SPECIFICATIONS, CONTRACT SPECIAL PROVISIONS AND THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP).
3. THE CONTRACTOR SHALL PERFORM ALL WORK AS DIRECTED BY THE ENGINEER AND AS SHOWN IN HIGHWAY STANDARD 280001.
4. WEEKLY SITE INSPECTIONS AND APPROPRIATE MAINTENANCE OF ALL EROSION CONTROL MEASURES/DEVICES SHALL BE CONDUCTED AND DOCUMENTED AT ALL TIMES DURING CONSTRUCTION AND ESPECIALLY PRIOR TO, DURING, AND AFTER RAIN EVENTS. THE CONTRACTOR SHALL IMMEDIATELY PLACE AND MAINTAIN TEMPORARY EROSION CONTROL SEEDING AT ALL ERODIBLE/BARE AREAS IN ACCORDANCE WITH SECTION 280 OF THE STANDARD SPECIFICATIONS. SEE SWPPP FOR ADDITIONAL REQUIREMENTS AND INFORMATION.
5. THE CONTRACTOR SHALL INSTALL AND MAINTAIN INLET FILTERS AT ALL EXISTING INLETS ADJACENT TO THE EDGE OF PAVEMENT PRIOR TO THE START OF PRE-STAGE WORK. THE INLET FILTERS SHALL BE MAINTAINED AT EACH SUBSEQUENT STAGE UNTIL NO LONGER REQUIRED OR AS DIRECTED BY THE ENGINEER.
6. THE CONTRACTOR SHALL IMMEDIATELY INSTALL AND MAINTAIN INLET FILTERS AT ALL NEW INLETS AND STORM SEWER STRUCTURES. THE INLET FILTERS SHALL BE MAINTAINED AT EACH SUBSEQUENT STAGE UNTIL COMPLETION OF STAGE 3 OR UNTIL NO LONGER REQUIRED.
7. THE CONTRACTOR SHALL PLACE SEDIMENT CONTROL AND SILT FENCE AROUND ALL EARTH STOCKPILES.
8. EROSION CONTROL MEASURES PLACED ON THE NORTH SIDE OF 22ND STREET DURING STAGE 1 AND THE SOUTH SIDE OF 22ND STREET DURING STAGE 2 SHALL REMAIN IN PLACE AND MAINTAINED THROUGH OUT STAGE 3 UNTIL NO LONGER REQUIRED.
9. AGGREGATE (EROSION CONTROL) AND FILTER FABRIC HAVE BEEN INCLUDED IN THE PLANS FOR STABILIZED CONSTRUCTION ENTRANCES/EXITS. LOCATIONS OF THE ENTRANCES/EXITS SHALL BE DETERMINED BY THE CONTRACTOR AND APPROVED BY THE ENGINEER. THE INSTALLATION OF THE ENTRANCE/EXITS SHALL BE IN ACCORDANCE WITH THE ILLINOIS URBAN MANUAL OR AS DIRECTED BY THE ENGINEER.
10. THE CONTRACTOR SHALL USE ROLLED EXCELSIOR FOR THE TEMPORARY DITCH CHECKS UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

**LEGEND**

- TEMPORARY DITCH CHECK, ROLLED EXCELSIOR SPACED 150' (TYP), UNLESS NOTED OTHERWISE ON THE PLANS (SEE STD 280001)
- SEDIMENT CONTROL, SILT FENCE (SEE STD 280001)
- INLET AND PIPE PROTECTION (SEE STANDARD 280001)
- TEMPORARY FENCE
- CONSTRUCTION WORK ZONE
- TEMPORARY PAVEMENT
- FLOWLINE FOR PROPOSED DITCH
- FLOWLINE OF EXISTING DITCH
- TREE REMOVED
- TREE PRUNED

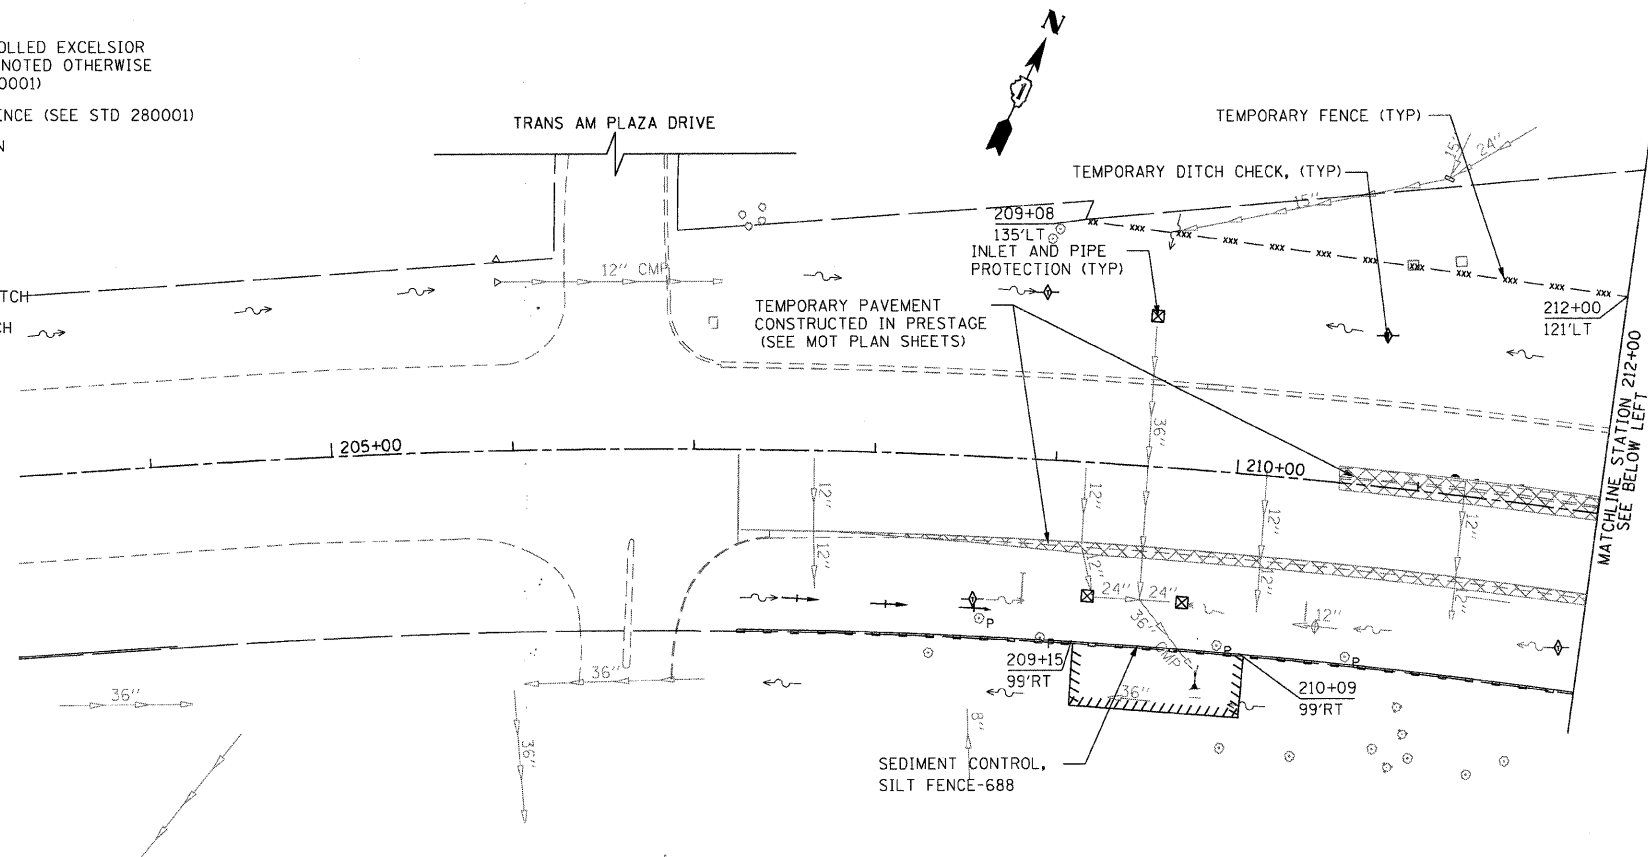

**STAGE IA, IB & IC EROSION CONTROL**  
 MAINTAIN EROSION CONTROL INSTALLED IN STAGE I. STAGE IA, IB, & IC NOT SHOWN

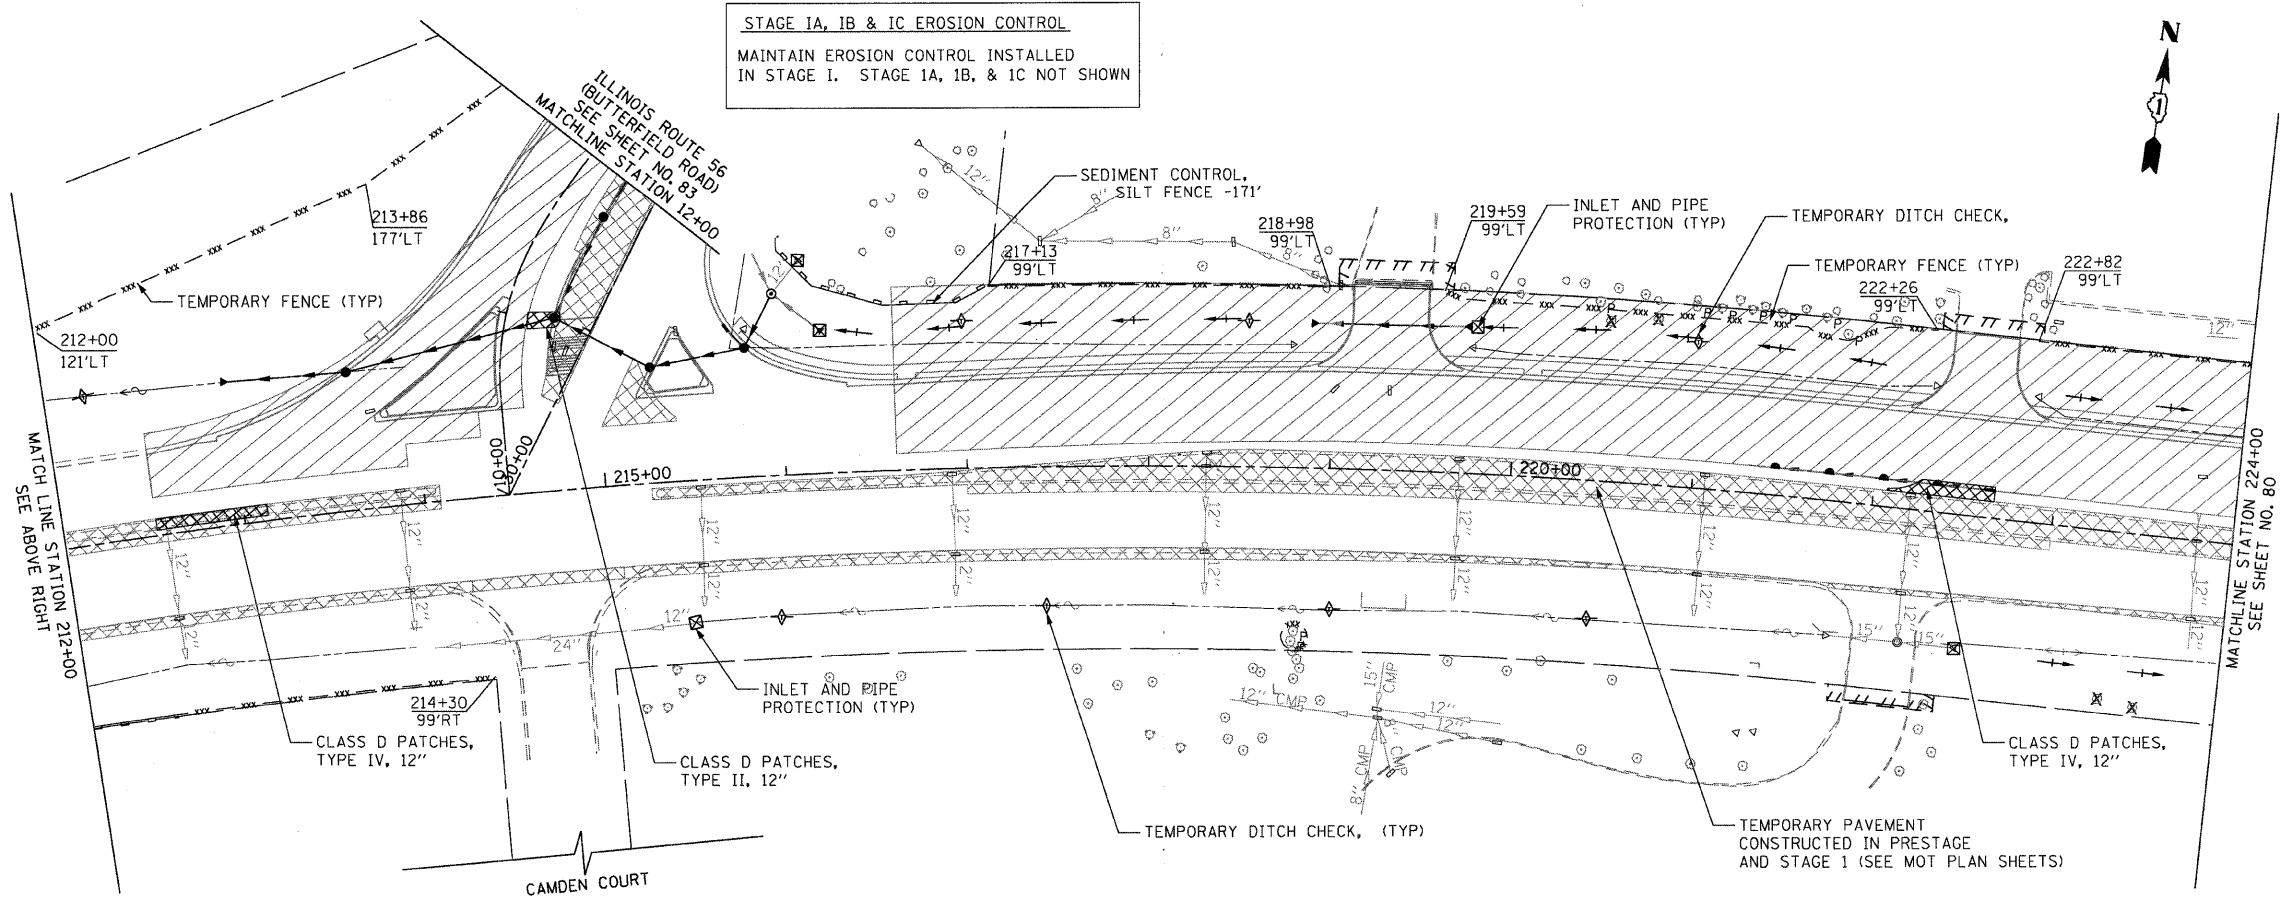

FILE NAME: E:\2007\11-07\22nd-street\cadd\shs\0166012-SHT-EROSION.dgn  
 PLOT SCALE: 1/4"=1'-0"  
 USER NAME: Millennium Engineering

**MILLENNIA ENGINEERING**  
 200 22ND Street, Suite 216, Lombard, IL 60148  
 630.785.0110 voice, 630.839.2566 fax  
 www.millenniaeng.com

DESIGNED - TVN	REVISED -
DRAWN - TVN	REVISED -
CHECKED - RPD	REVISED -
DATE - 7/24/2009	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

**22nd STREET EROSION CONTROL PLAN**  
**STAGE I**  
 SCALE: 1"=50' SHEET NO. 79 OF 362 SHEETS STA. 200+00 TO STA. 224+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1453	55WRS	DUPAGE	362	79
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT				CONTRACT NO. 60D12

ER101

p:\2007\11-07\22nd-street\cadd\shs\0166012-SHT-EROSION.dgn