
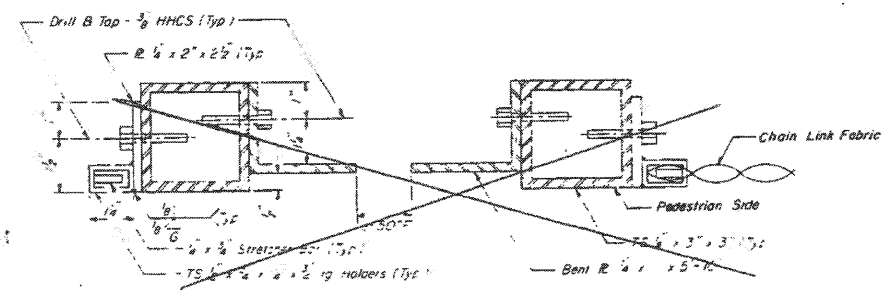
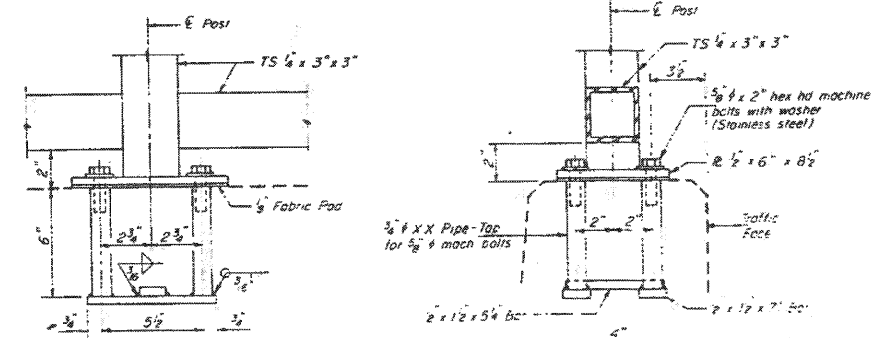
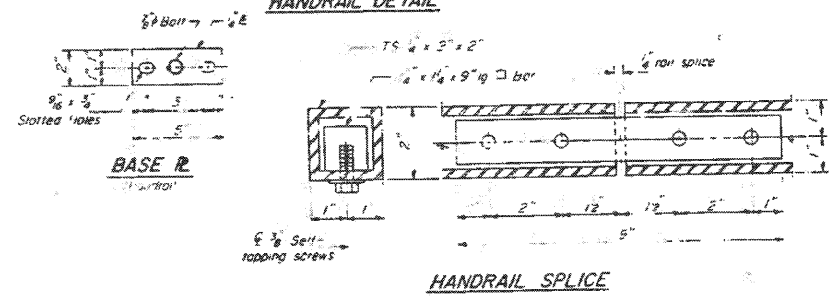
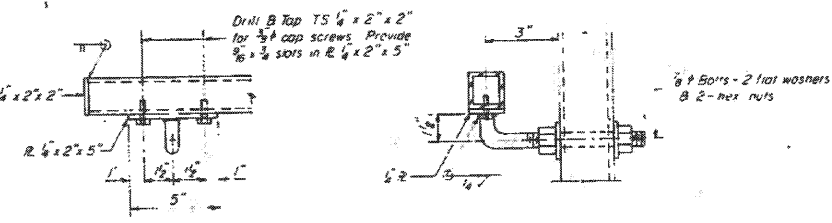
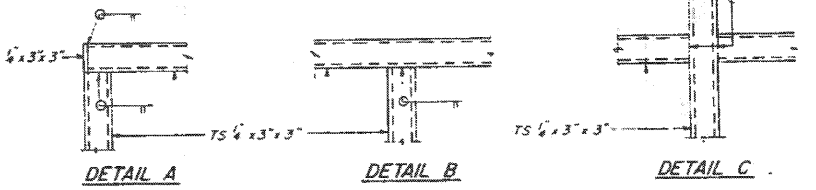
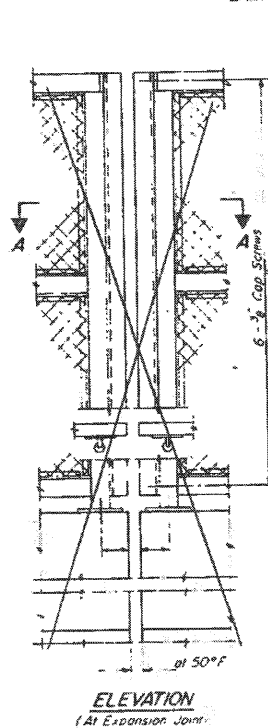


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROJECT NO.	1010.1-I-2	SHEET NO.	22
DATE	11/01/85	SCALE	AS SHOWN
DESIGNED BY	COOK	CHECKED BY	COOK
1010.1-I-2 & 1012.1(85)			

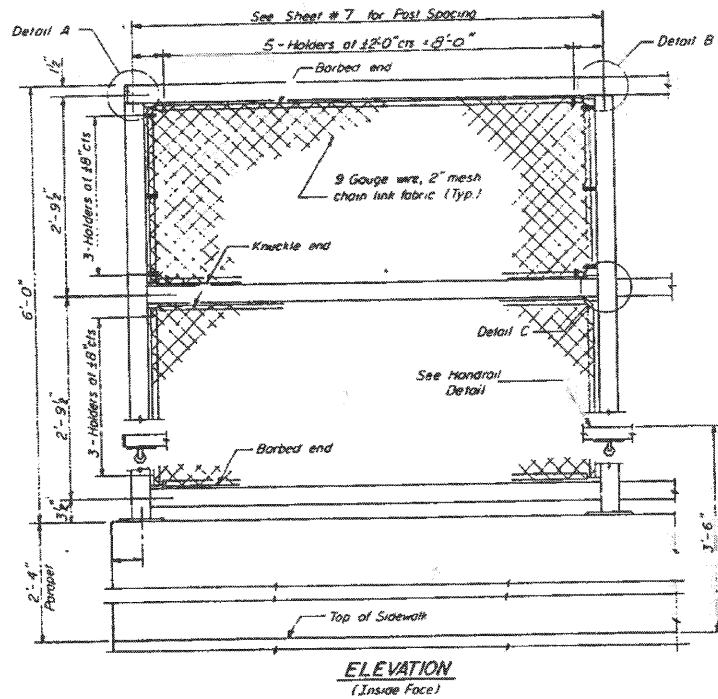

DESIGNED	
CHECKED	
DRAWN	
CHECKED	

R-28 12-31-87 110'-0" Maximum Post Spacing

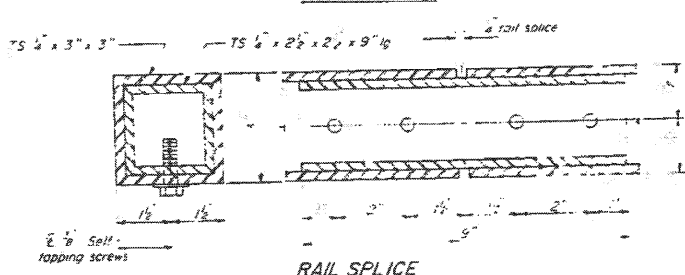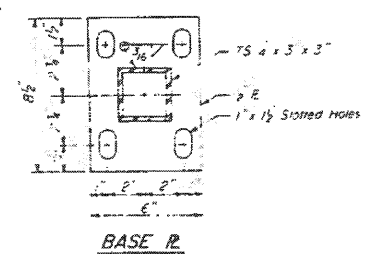

NOTES

Reinforcing shall be in accordance with Section 508 of the Standard Specifications except as noted, and will be as shown at the Contractor's price and unit foot for Pedestrian Railing. The 9 gauge fabric ties shall be in accordance with Article 710.33(1) of the Standard Specifications.
Installation of the chain link fabric shall be in accordance with Section 629 of the Standard Specifications. Allow structural steel tubing shall conform to the requirements of ASTM designation A 500, Grade B, structural steel tubing. All other steel shapes and plates shall conform to the requirements of AASHTO M183. The chain link fabric shall be placed along Pedestrian Side as shown on Section A-A. Stretcher bars shall be used at all four sides of each panel.

All posts, railing, splices, anchor devices and bent plates shall be galvanized after shop fabrication in accordance with AASHTO M-111 and ASTM A-385. All bolts, nuts and washers shall be galvanized in accordance with AASHTO M-232. Vent holes for galvanizing shall be placed in the posts and rails at locations that will not allow the accumulation of moisture in the members. The chain link fabric shall conform to the requirements of Article 710.33(a)(1)(2) or (3) of the Std. Specs.

BILL OF MATERIAL

Item	Unit	Quantity
Pedestrian Railing	Lin Ft	460

PEDESTRIAN RAILING
FA. 99 SEC. 1010.1B-R+1012 (85)
COOK COUNTY
STR. NO. 016-0536

FOR INFORMATION ONLY

alfred benesch & company
Engineers - Surveyors - Planners
205 North Michigan Avenue, Suite 2400
Chicago, Illinois 60601
312-565-0450 Job No. 10032.13

SHEET NO. 17 17 SHEETS	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	94	1010.1-I-2	COOK	37	29
FED. ROAD DIST. NO.			ILLINOIS FED. AID PROJECT		
CONTRACT NO. 60J30					

EXISTING PLAN INFORMATION 6 OF 6
STRUCTURE NO. 016-0536

15:45:29
 c:\10000s\10032\engineering_documents\contract-60j30\SN_016_0536_Willow_Rd\0536-60J30-017-Explosion_06.dgn
 03/22/2010