

QUAD CITY INTERNATIONAL AIRPORT  
TAXIWAY P, PHASE I - EARTHWORK  
ILL. MLI-3790, QU006  
SHEET 83 OF 94



SERVICE ROAD  
EARTHWORK DATA STA. 10+44 TO 39+05

STATION	AREAS		VOLUMES		CUMULATIVE VOLUMES	
	CUT	FILL	CUT	FILL	CUT	FILL
10+44	12.2623	0.1779	2.6843	0.0305	2.6843	0.0305
10+50	11.8962	0.0967	21.3100	0.3256	23.9943	0.3561
11+00	11.1186	0.2549	20.7509	0.2776	44.7452	0.6337
11+50	11.2923	0.0449	20.6596	0.0989	65.4048	0.7326
12+00	10.9168	0.0693	20.1553	0.0797	85.5601	0.8123
12+50	10.8509	0.0167	20.7381	0.0155	106.2982	0.8278
13+00	11.5463	0.0000	10.7056	22.3751	117.0038	23.2028
13+50	0.0000	25.0129	0.0000	63.5430	117.0038	86.7459
14+00	0.0000	43.6136	0.5594	24.3858	117.5633	111.1316
14+24	1.2587	11.2545	3.3169	7.4493	120.8801	118.5809
14+50	5.6301	4.2171	15.2699	3.9370	136.1501	122.5179
15+00	10.8614	0.0349	20.0885	0.0323	156.2385	122.5503
15+50	10.8341	0.0000	20.0644	0.0012	176.3029	122.5515
16+00	10.8354	0.0013	20.1466	0.0018	196.4495	122.5533
16+50	10.9229	0.0007	20.1768	0.0320	216.6262	122.5853
17+00	10.8680	0.0339	20.1380	0.0748	236.7642	122.6601
17+50	10.8810	0.0469	20.1169	0.0537	256.8911	122.7138
18+00	10.8452	0.0111	20.0940	0.0309	276.9751	122.7447
18+50	10.8563	0.0223	20.1206	0.0576	297.0957	122.8023
19+00	10.8740	0.0399	20.1327	0.0548	317.2284	122.8570
19+50	10.8693	0.0192	20.1107	0.0328	337.3391	122.8898
20+00	10.8503	0.0161	20.1488	0.0857	357.4879	122.9784
20+50	10.9105	0.0764	20.1419	0.1245	377.6298	123.0999
21+00	10.8428	0.0580	20.0909	0.0845	397.7207	123.1844
21+50	10.8554	0.0333	20.1391	0.0949	417.8598	123.2793
22+00	10.8948	0.0692	19.1789	0.1302	437.0387	123.4096
22+47.49	10.9131	0.0789	1.0145	0.0073	438.0532	123.4169
22+50	10.9130	0.0789	20.2734	0.1909	458.3266	123.6078
23+00	10.9823	0.1273	20.2536	0.1711	478.5802	123.7789
23+50	10.8916	0.0575	20.1309	0.0826	498.7111	123.8616
24+00	10.8497	0.0318	20.1778	0.0405	518.8889	123.9020
24+50	10.9422	0.0119	20.1294	0.0271	539.0182	123.9292
25+00	10.7975	0.0173	20.0325	0.0215	559.0508	123.9507
25+50	10.8376	0.0059	20.1007	0.0055	579.1515	123.9561
26+00	10.8712	0.0000	20.0986	0.0011	599.2501	123.9572
26+50	10.8353	0.0012	20.0705	0.0118	619.3206	123.9690
27+00	10.8408	0.0116	20.1065	0.0276	639.4271	123.9986
27+50	10.8525	0.0196	20.2408	0.1277	659.6678	124.1243
28+00	10.9623	0.1247	19.6114	0.3545	679.2792	124.4789
28+50	10.1683	0.2766	19.4734	0.2451	698.7528	124.7239
29+00	10.8433	0.0003	20.0292	0.0082	718.7818	124.7322
29+50	10.7883	0.0086	20.0622	0.0495	738.8441	124.7816
30+00	10.8790	0.0448	20.1091	0.0460	758.9532	124.8276
30+50	10.8389	0.0048	20.0828	0.0196	779.0360	124.8472
31+00	10.8505	0.0164	20.1292	0.0660	799.1652	124.9132
31+50	10.8890	0.0549	20.0820	0.1112	819.2472	125.0244
32+00	10.7995	0.0652	20.0477	0.0769	839.2949	125.1013
32+50	10.8520	0.0179	20.0811	0.0179	859.3760	125.1192
33+00	10.8356	0.0014	20.0974	0.0334	879.4734	125.1526
33+50	10.8696	0.0346	20.1286	0.0389	899.6020	125.1915
34+00	10.8693	0.0074	20.1028	0.0155	919.7048	125.2070
34+50	10.8417	0.0093	20.0906	0.0202	939.7954	125.2272
35+00	10.8561	0.0125	20.2854	0.0118	960.0808	125.2390
35+50	11.0598	0.0000	20.2752	0.0001	980.3560	125.2391
36+00	10.8342	0.0001	20.1969	0.2168	1000.5528	125.4559
36+50	11.0188	0.2241	20.5178	0.7134	1021.0706	126.1693
37+00	11.2440	0.5102	20.5263	0.5561	1041.5969	126.7254
37+50	10.9244	0.0903	22.9123	0.0990	1064.5092	126.8243
38+00	14.0300	0.0120	23.6154	2.2364	1088.1246	129.0607
38+50	11.8084	2.2826	20.6273	2.4253	1108.7519	131.4861
39+00	10.4691	0.3367	1.9387	0.0624	1110.6906	131.5484
39+05	10.4691	0.3367	0.0000	0.0000	1110.6906	131.5484
GRAND TOTAL			1111	132 *		

\* COMPACTED FILL  
UNADJUSTED VALUE

KEY FOR EARTHWORK

	UC = UNCLASSIFIED CUT
	CF = COMPACTED FILL
	UF = UNCOMPACTED FILL

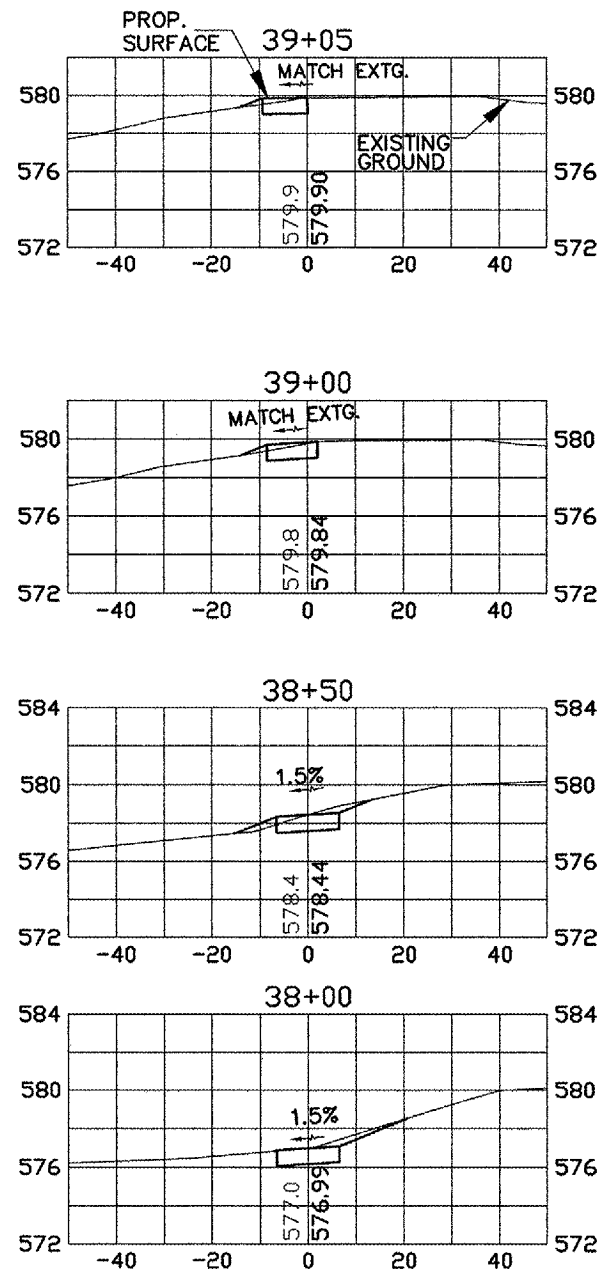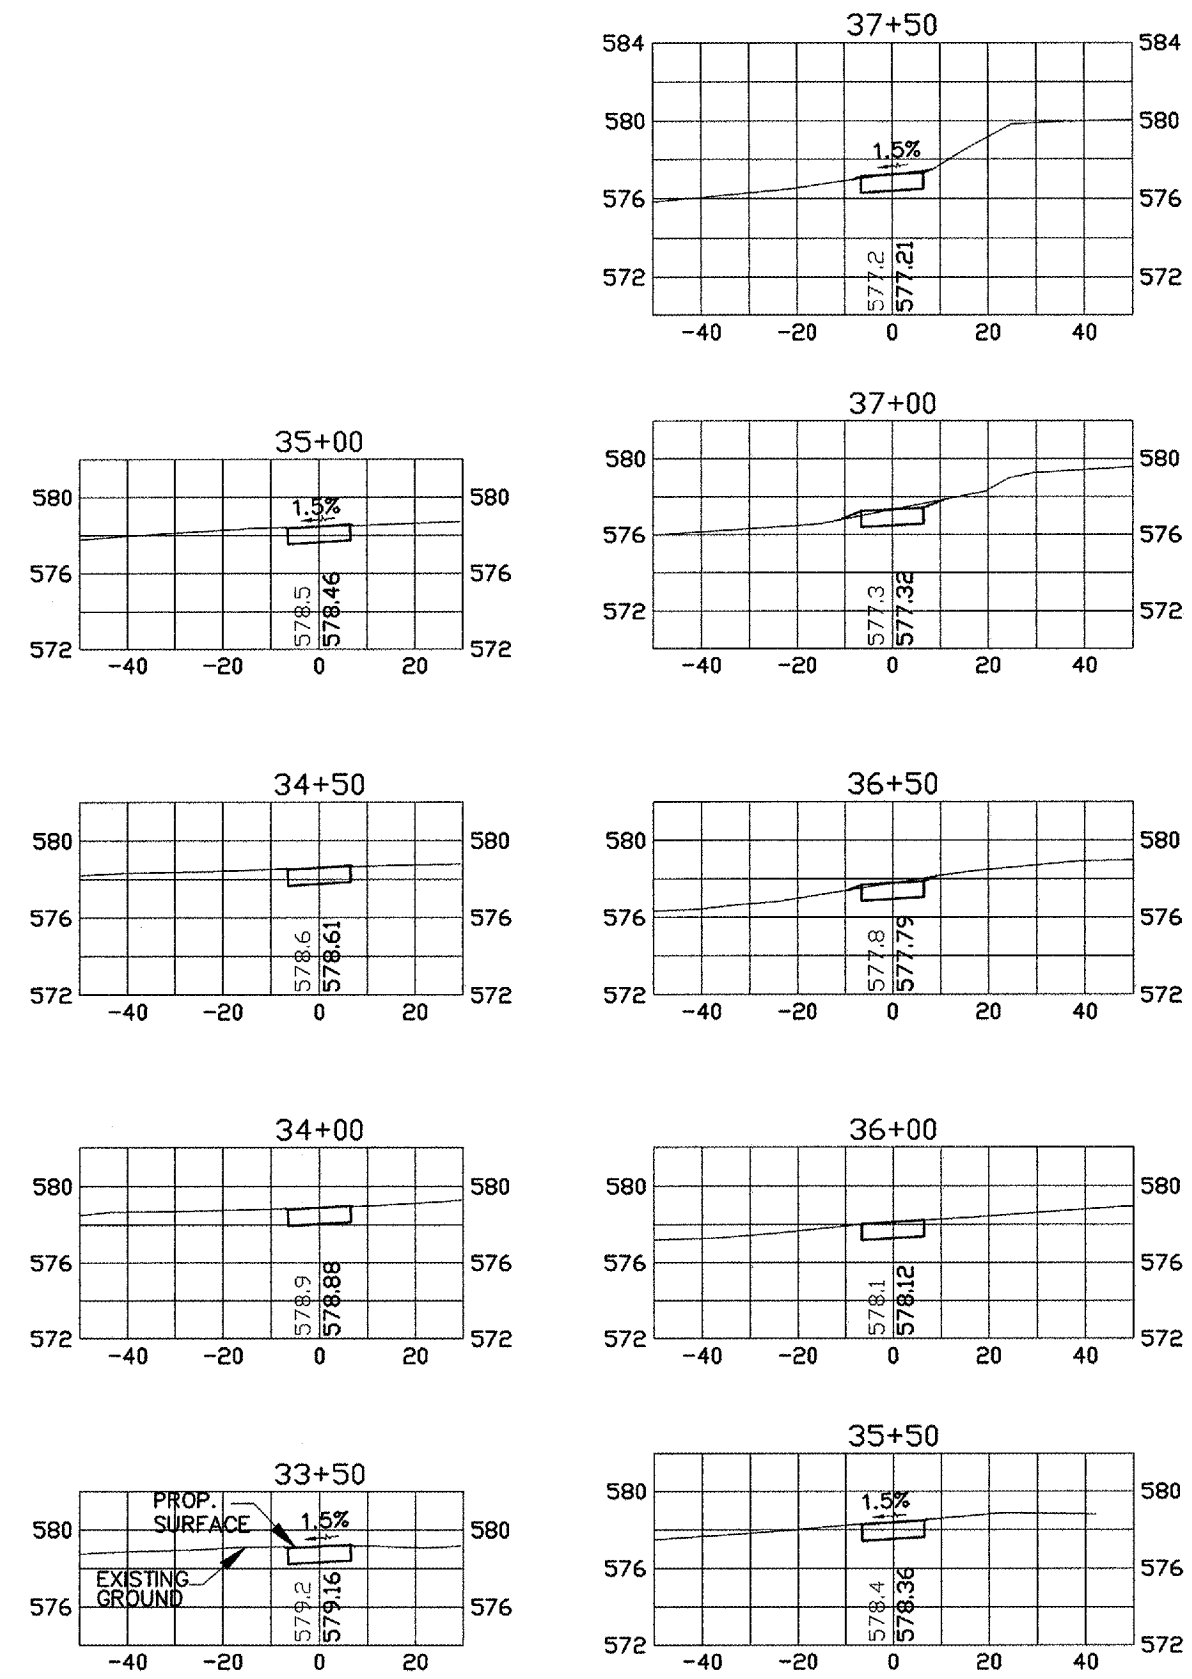

G:\AIRPORT\A07T030 TP EARTHWORK DSN\Sections Service Road.dwg, 4/21/2008 11:45:49 AM, jefjm