
EROSION CONTROL LEGEND TEMPORARY EROSION CONTROL SEEDING TEMPORARY DITCH CHECK AND MULCH METHOD 2 TEMPORARY EROSION CONTROL SEEDING TEMPORARY DITCH CHECK INSTALLED AND TEMPORARY EROSION CONTROL BLANKET IN PREVIOUS STAGE PERMANENT SEEDING (SEE NOTE 3) INLET & PIPE PROTECTION TEMPORARY EROSION CONTROL SEEDING OR PERMANENT \oplus INLET & PIPE PROTECTION INSTALLED SEEDING INSTALLED IN A PREVIOUS STAGE IN PREVIOUS STAGE TEMPORARY PAVEMENT FLOW DIRECTION (SEE NOTE 4) **-**^ → PERIMETER EROSION BARRIER (SEE NOTE 2) PROPOSED STORM SEWER (SEE NOTE 1) PERIMETER EROSION BARRIER INSTALLED PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE IN PREVIOUS STAGE INLET FILTER TEMPORARY PIPE CULVERT PERMANENT DRAINAGE STRUCTURE INLET FILTER INSTALLED IN PREVIOUS STAGE NUMBER (SEE NOTE 1)

(*) - SEE NOTE 5

NOTES

- 1. SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION.
- PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
- 3. SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
- 4. SEE STAGE 2 CROSS SECTIONS FOR GRADING INFORMATION.
- 5. PROPOSED STRUCTURE SHALL BE BURIED AND TEMPORARILY COVERED/CLOSED WITH STEEL PLATE OF THICKNESS SPECIFIED AND APPROVED BY THE ENGINEER, PAYMENT FOR THIS TEMPORARY COVER INSTALLATION AND REMOVAL SHALL BE CONSIDERED INCLUDED IN THE COST OF THE PROPOSED STRUCTURE.

SCALE IN FEET

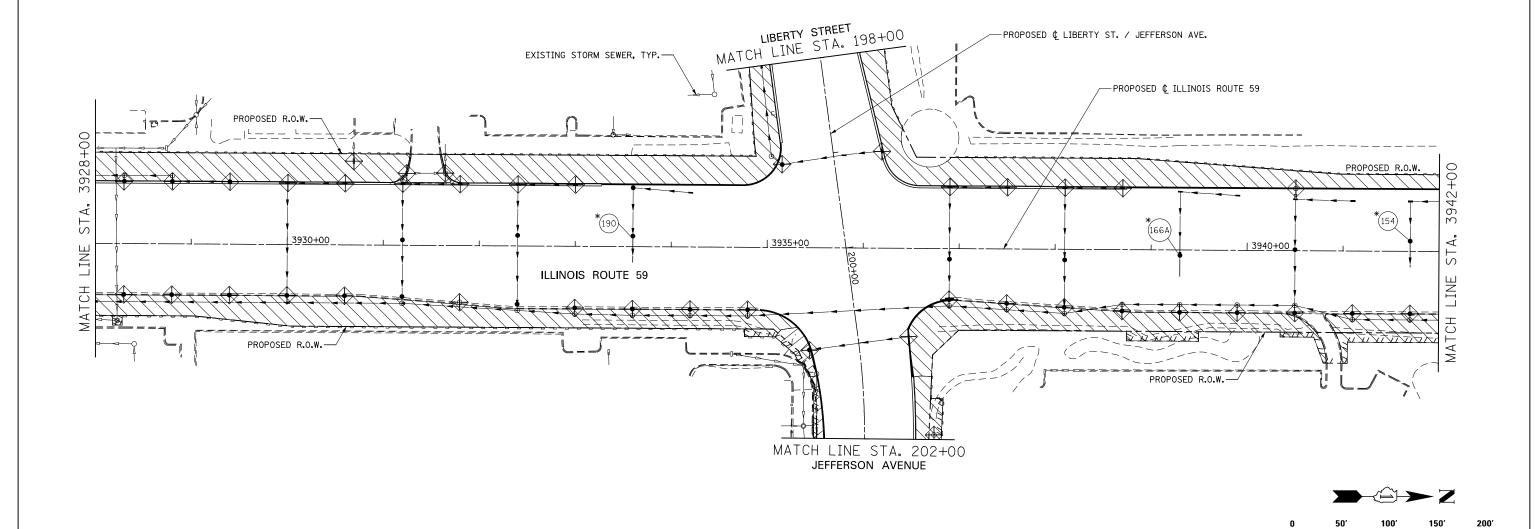

	DESIGNED PJO	REVISED -	STATE OF ILLINOIS	EROSION CONTROL – STAGE 2, 2A AND 2B	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
	DRAWN KES	REVISED -			338	(112 & 113) WRS-7	DUPAGE	1156 721
	CHECKED <i>JCM</i>	REVISED -	DEPARTMENT OF TRANSPORTATION	ILLINUIS NOUTE 39	CONTRACT NO. 60R30			
	DATE 12/14/2	2012 REVISED -		SCALE: AS SHOWN SHEET NO. 31 OF 70 SHEETS STA. 3928+00 TO STA. 3942+00	ILLINOIS FED, AID PROJECT			