


NOTES

1. FOR SYMBOL LIST AND ABBREVIATIONS, SEE SHEET LT-01.
2. POLES PREVIOUSLY REMOVED FROM MEDIAN IL 59 AT AURORA AVE/NEW YORK ST SHALL BE USED.
3. ALL WIRING SHALL BE UNIT DUCT, 600V, 4-1C NO.6, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE UNLESS OTHERWISE NOTED.
4. POLE SET BACK SHALL BE MEASURED FROM THE BACK OF THE CURB TO THE CENTER OF THE POLE/BASE.
5. LIGHT POLES SHALL BE WIRED FROM CITY OF NAPERVILLE CONTROLLER.
6. BOLT CIRCLE AND ANCHOR BOLTS NUMBER AND LAYOUT OF THE FOUNDATION SHALL MATCH THE NEW/RE-INSTALLED POLE.
7. LIGHT POLES SHALL BE WIRED FROM IDOT LIGHTING CONTROLLER ON IL 59 SOUTH OF INTERSECTION WITH AURORA AVE.
8. UNIT DUCT, 600V, 4-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/2" DIA. POLYETHYLENE.
9. POLES PREVIOUSLY REMOVED FROM NORTH SIDE OF AURORA AVE. SHALL BE USED.

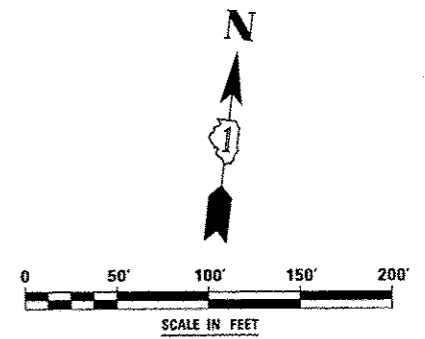

	DESIGNED <i>MCP</i>	REVISED - ADDENDUM A 02/20/2013	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LIGHTING PLAN - AURORA AVENUE	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	DRAWN <i>MLB</i>	REVISED -			338	(112 & 113) WRS-7	DUPAGE	1156	789	
	CHECKED <i>MCP</i>	REVISED -			LT-19		CONTRACT NO. 60R30			
	DATE <i>12/14/2012</i>	REVISED -			SCALE: AS SHOWN		SHEET NO. 8 OF 15 SHEETS		STA. TO STA.	