




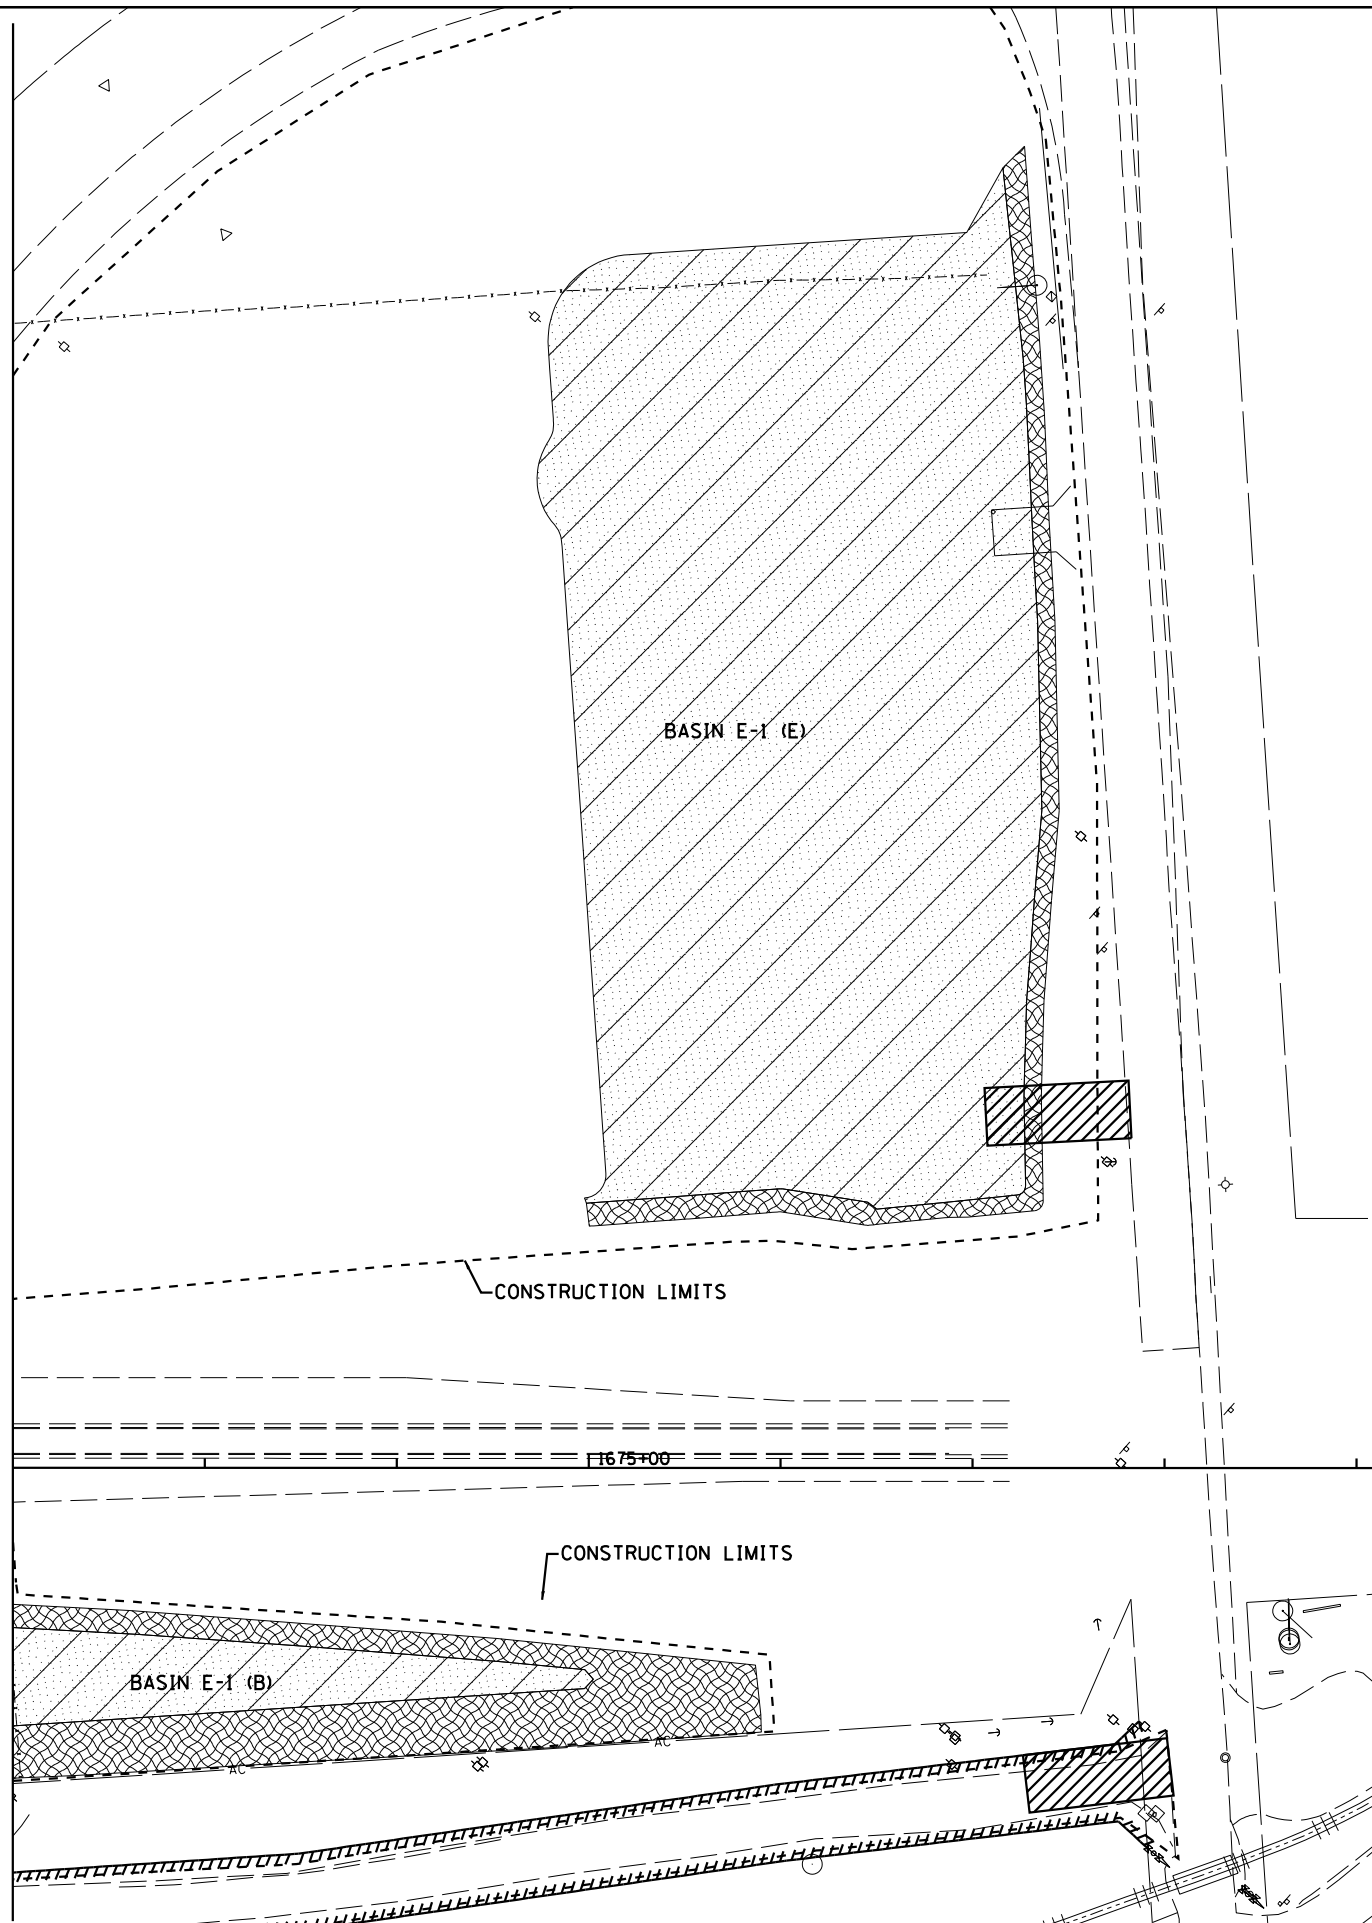





MATCH LINE STA 1672+00



LEGEND

-  DURING CONSTRUCTION TEMPORARY EROSION CONTROL SEEDING SHALL BE PLACED
-  DURING CONSTRUCTION TEMPORARY EROSION CONTROL SEEDING SHALL BE PLACED, IN ADDITION, AT CONCLUSION OF THE CONSTRUCTION - SEEDING, CLASS 2A & MULCH, METHOD 2
-  DURING CONSTRUCTION TEMPORARY EROSION CONTROL SEEDING SHALL BE PLACED, IN ADDITION, AT CONCLUSION OF THE CONSTRUCTION - SEEDING, CLASS 3A & HEAVY DUTY EROSION CONTROL BLANKET
-  DURING CONSTRUCTION TEMPORARY EROSION CONTROL SEEDING SHALL BE PLACED, IN ADDITION, AT CONCLUSION OF THE CONSTRUCTION - SEEDING, CLASS 4 & MULCH, METHOD 2
-  DURING CONSTRUCTION TEMPORARY EROSION CONTROL SEEDING SHALL BE PLACED, IN ADDITION, AT CONCLUSION OF THE CONSTRUCTION - SEEDING, CLASS 4A & MULCH, METHOD 2
-  DURING CONSTRUCTION TEMPORARY EROSION CONTROL SEEDING SHALL BE PLACED, IN ADDITION, AT CONCLUSION OF THE CONSTRUCTION - SEEDING, CLASS 3A & EROSION CONTROL BLANKET
-  STABILIZED CONSTRUCTION ENTRANCE (30'x75' TYP)

ATTENTION: THE EXISTING UTILITIES LOCATED ALONG THE UNITED CELLULAR CORPORATION (USCOC) ENTRANCE ROAD INCLUDE FIBER OPTIC CABLES THAT ARE VITAL TO THE REGIONAL 911 COMMUNICATIONS, AND TO USCOC'S BUSINESS OPERATIONS. THE CONTRACTOR SHALL USE EXTREME CARE TO NOT ADVERSELY IMPACT USCOC FACILITIES.



USER NAME = dmeyer	DESIGNED - JJO	REVISED - 02/06/13
	DRAWN - JJO	REVISED - 03/15/13
PLOT SCALE = 100.0000' / 1" =	CHECKED - PJM	REVISED -
PLOT DATE = 3/15/2013	DATE - 12/10/12	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
788	520-1-2HVB, 520-1-2HVB-1	ST. CLAIR	237	31
CONTRACT NO. 76848				
ILLINOIS FED. AID PROJECT				